


DATA BOOK *SEPTEMBER 2022 EDITION*



Experienced driver depicted.

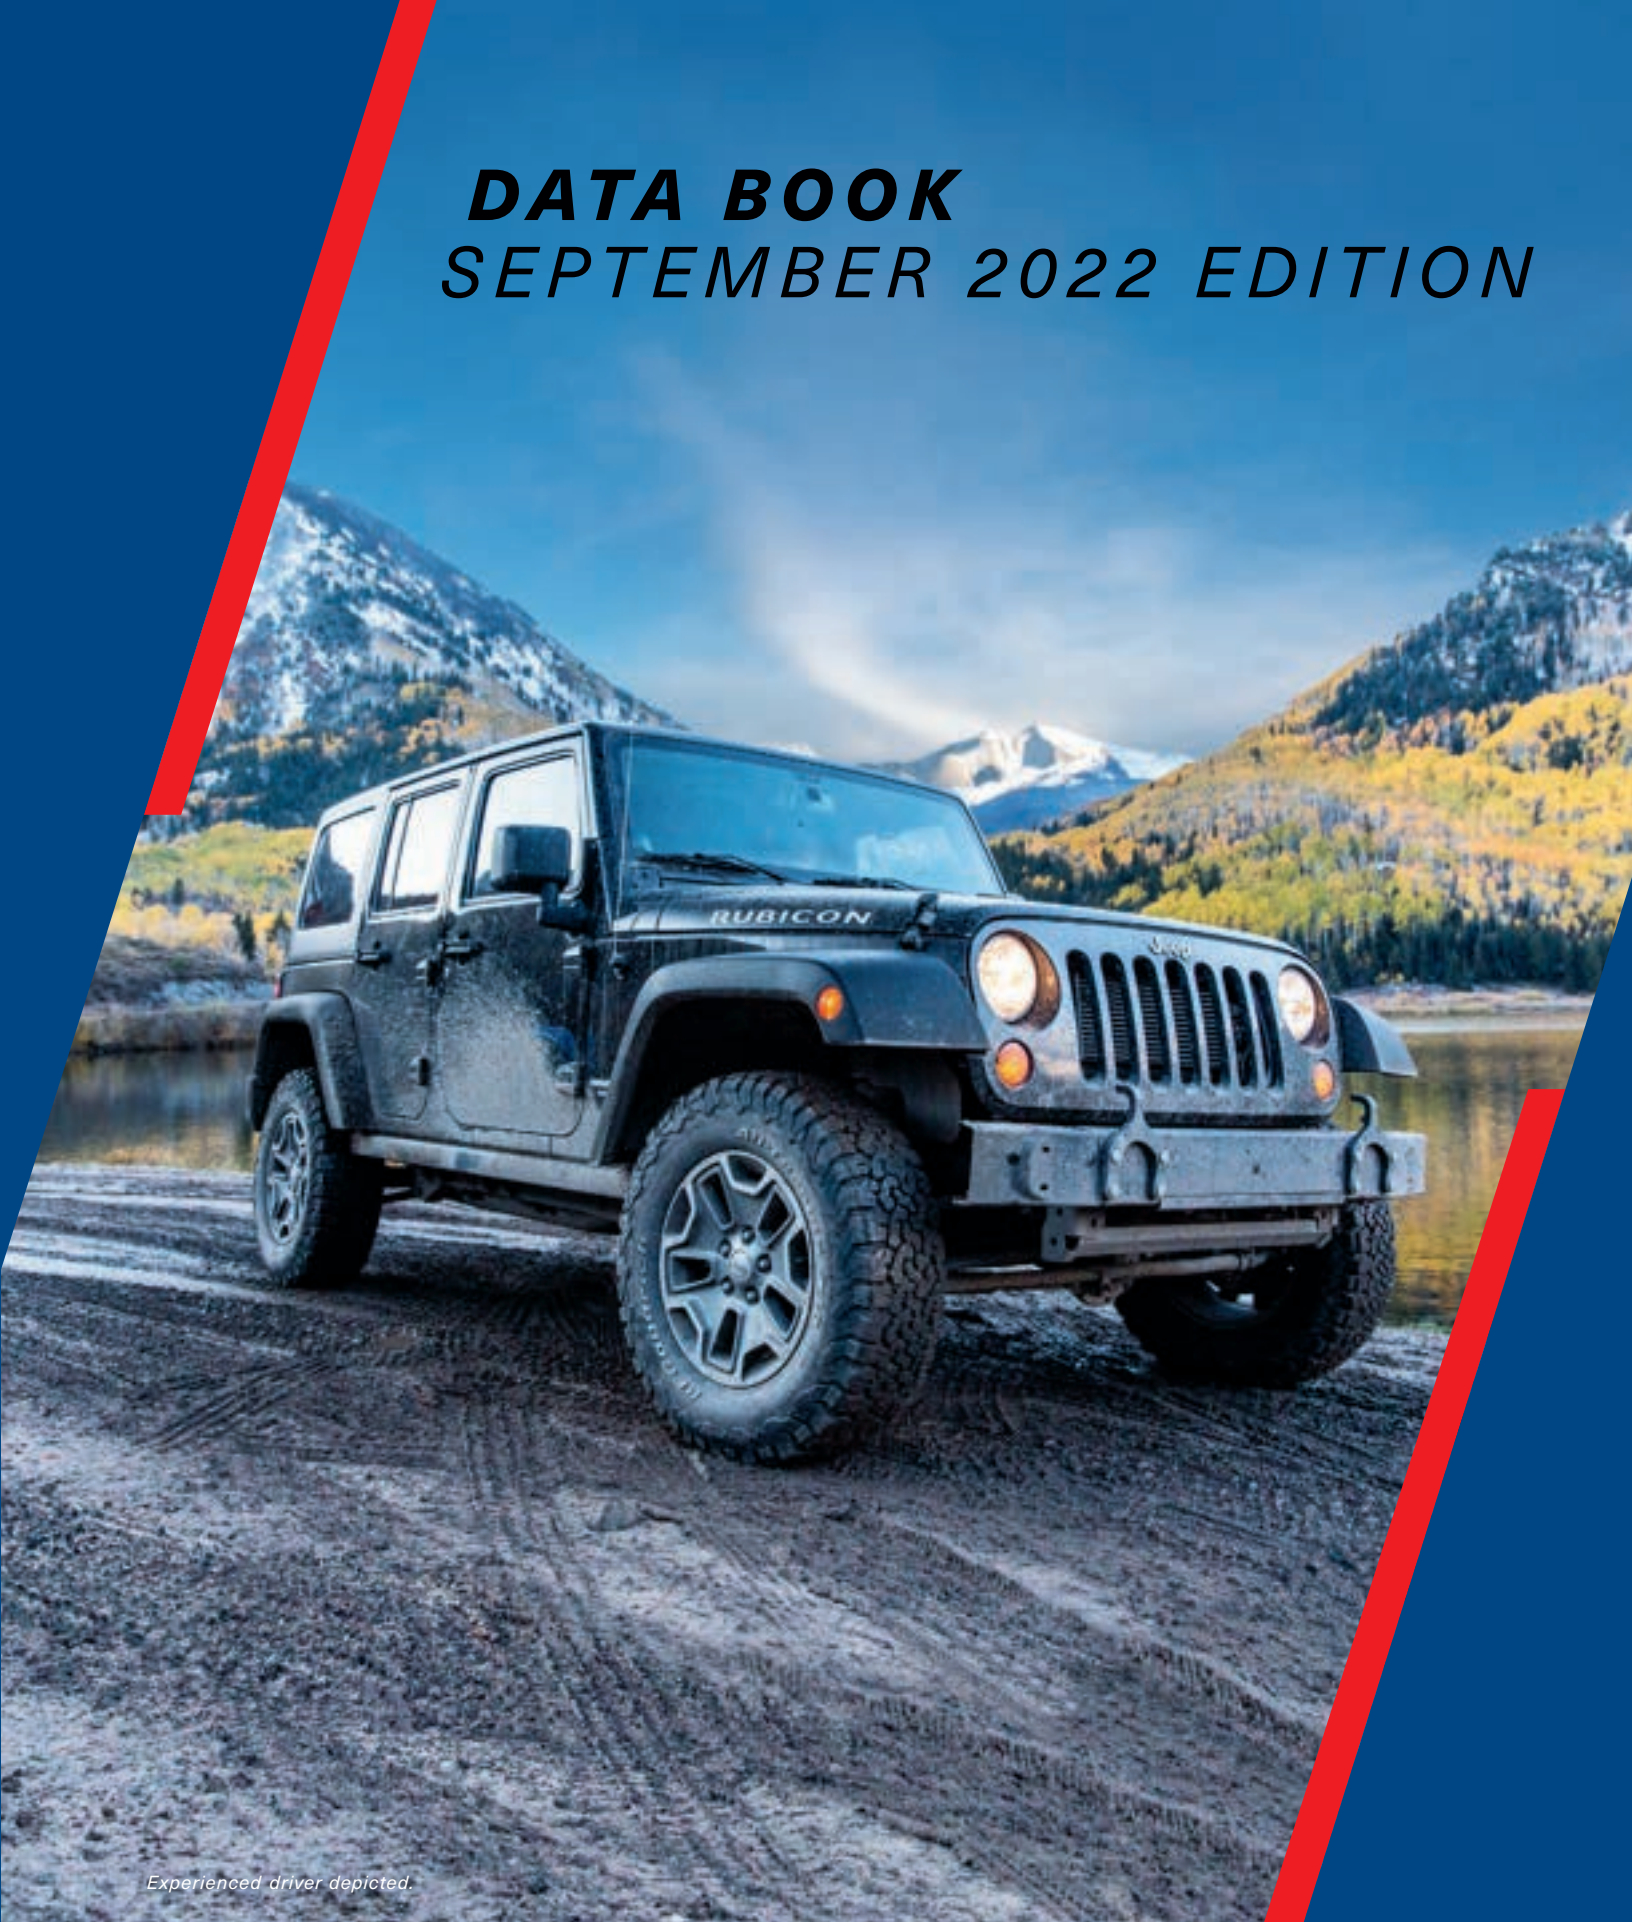

**PERFORMANCE
DRIVEN SINCE DAY ONE**

Experienced driver depicted.

TABLE OF CONTENTS

ULTRA-HIGH PERFORMANCE

g-Force™ Rival® S.....	4
g-Force™ Sport COMP-2™	6
g-Force™ COMP-2™ A/S PLUS.....	8

PERFORMANCE/TOURING

Advantage Control™	12
Radial T/A®	16
Elite-Force T/A®	18

LIGHT TRUCK/SUV

All-Terrain T/A® KO2.....	22
Mud-Terrain T/A® KM3.....	26
Mud-Terrain T/A® KM2.....	28
Krawler™ T/A® KX.....	30
Trail-Terrain T/A®	32
Advantage T/A® Sport LT	34
Commercial T/A® All-Season 2.....	36

UTV

Mud-Terrain T/A® KM3 UTV.....	40
-------------------------------	----

TIPS & IMPORTANT INFORMATION

Tire Tips	42
Speed Ratings.....	43
Important Product Information	44



**ULTRA-HIGH
PERFORMANCE**

ULTRA-HIGH PERFORMANCE

Sports coupes and factory-tuned sedans are built to thrill with speed and handling capabilities that demand a true performance tire to match.



KEY TIRE LINE COMPARISONS	WEAR	EFFICIENCY	HANDLING	BRAKING	COMFORT
g-Force™ Rival® S	3	4	10	10	5
g-Force™ Sport COMP-2™	8	6	9	9	7
g-Force™ COMP-2™ A/S PLUS	8	7	9.5	8.5	9



BFGOODRICH® g-FORCE™ RIVAL® S

STREET, AUTOCROSS OR TIME ATTACK – If it's paved, own it.



SUMMER



BENEFITS OF BFGOODRICH® TIRES

Updated v1.5 version uses the same time-tested Rival® S compound for quick warm-up in autocross and time attack competitions.

Enhanced "S" compound offers maximum dry performance, sacrificing some wear, while still exceeding UTQG 200 standards.

Rival® S v1.5 offers internal construction enhancements for improved turn-in and transitional handling.

Performance Racing Core (PRC) – reinforced internal structure reduces sidewall flex for a quick steering response.

DOT UTQG 200 semi-competition tire legal for SCCA Solo, SCCA Pro Solo, Goodguys Pro Touring and One Lap of America competitions.

Rival® S v1.5 is legal for amateur autocross and time attack competitions with most sanctioning bodies in the USA and Canada.



POPULAR REPLACEMENT MARKET FITMENTS:

- Autocross/Autoslalom
- Time Attack/Time Trial
- Pro-Touring
- Chevrolet Camaro
- Ford Mustang
- Honda Civic
- Mazda MX-5 Miata



BFGOODRICH® g-FORCE™ RIVAL® S

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG
205/50R15	86V		STD	BSW	36905	5.5 - 7.5	8.4 on 6.5	23.1	7.2	900	1168@44	200/AA/A
225/45R15	87V		STD	BSW	48530	7 - 8.5	8.9 on 7.5	22.9	7.2	906	1201@44	200/AA/A
245/40R15	88V		STD	BSW	84280	8 - 9.5	9.9 on 8.5	22.6	7.2	915	1235@44	200/AA/A
215/45R16	86V		STD	BSW	97902	7 - 8	8.4 on 7	23.6	7.2	881	1168@44	200/AA/A
225/45R17	91V		STD	BSW	79018	7 - 8.5	8.9 on 7.5	24.9	7.2	833	1356@44	200/AA/A
245/40R17	91V		STD	BSW	55941	8 - 9.5	9.8 on 8.5	24.7	7.2	841	1356@44	200/AA/A
255/40R17	94V		STD	BSW	85885	8.5 - 10	10.2 on 9	25	7.2	831	1477@44	200/AA/A
245/40R18	93V		STD	BSW	08432	8 - 9.5	9.8 on 8.5	25.7	7.2	809	1433@44	200/AA/A
P275/35ZR18/LL	87W		STD	BSW	24274	9 - 11	10.9 on 9.5	25.5	7.2	814	1201@51	200/AA/A
P315/30ZR18/LL	91W		STD	BSW	86742	10.5 - 11.5	12.6 on 11	25.4	7.2	817	1356@51	200/AA/A
P335/30ZR18/LL	95W		STD	BSW	06491	11.5 - 12.5	13.5 on 12	25.9	7.2	802	1521@51	200/AA/A
275/35ZR19	96W		STD	BSW	14261	9 - 11	10.9 on 9.5	26.5	7.2	783	1565@51	200/AA/A
305/30ZR19	98W		STD	BSW	23080	10.5 - 11.5	12.3 on 11	26.2	7.2	792	1653@51	200/AA/A

Ultra-High Performance

BFGOODRICH®
g-FORCE™ SPORT COMP-2™

Accelerate faster¹, corner harder² and brake shorter⁵ for next-level control and next-level fun on the street.



BENEFITS OF BFGOODRICH® TIRES

ACCELERATE FASTER. Best dry traction vs. the competition⁴ on the track for 100% more fun on the street¹.

COMP-2™ Compound – Silica-infused COMP-2™ compound is derived from racing technology and delivers a sharp steering response and leading grip in wet and dry conditions without sacrificing treadwear.

BRAKE SHORTER. Stops up to 16 feet shorter in the wet³ and even up to 9 feet shorter in the dry⁵ for more control entering the corners.

Sport Tread Design – g-Force™ Sport tread pattern provides proven stability and maximum cornering power while g-Hooks provide Biting Edges for grip at any cornering angle.

CORNER HARDER. More control for precise cornering, with 30% better wet and 8% better dry grip².

Performance Racing Core (PRC) – Internal structure features a reinforced construction that delivers increased responsiveness, control and durability as well as serious control in hard cornering.



WEAR



EFFICIENCY



HANDLING



BRAKING



COMFORT

POPULAR REPLACEMENT MARKET FITMENTS:

- Chevrolet Camaro SS
- Dodge Challenger SRT-8
- Ford Mustang GT
- Honda Civic Si
- Mazda MX-5 Miata
- Subaru Impreza WRX STI
- Volkswagen Golf GTI

¹Based on internal subjective dry and wet autocross and subjective max handling test results vs. the YOKOHAMA® S.drive™, Kumho® Ecsta® SPT KU31 and Dunlop® Direzza® DZ101 tires.

²Based on internal subjective dry and wet autocross and subjective max handling test results vs. the BFGoodrich® g-Force™ Sport tire.

³Based on commissioned third-party test results vs. the YOKOHAMA® S.drive™ tire.

⁴Competition refers to the following: the YOKOHAMA® S.drive™, Kumho® Ecsta® SPT KU31 and Dunlop® Direzza® DZ101 tires.

⁵Based on dry braking test results vs. the Kumho® Ecsta® SPT KU31 tire.



BFGOODRICH® g-FORCE™ SPORT COMP-2™

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
205/55ZR16	91W		STD	BSW	55712	5.5 - 7.5	8.4 on 6.5	24.9	9	836	1356@51	340/AA/A
245/50ZR16	97W		STD	BSW	13737	7 - 8.5	10 on 7.5	25.7	9	810	1609@51	340/AA/A
255/50ZR16	99W		STD	BSW	29304	7 - 9	10.4 on 8	26.1	9	798	1709@51	340/AA/A
205/45ZR17/XL	88W		STD	BSW	87731	6.5 - 7.5	8.1 on 7	24.3	9	858	1235@50	340/AA/A
205/50ZR17	89W		STD	BSW	15000	5.5 - 7.5	8.4 on 6.5	25.1	9	828	1279@51	340/AA/A
215/45ZR17	87W		STD	BSW	95148	7 - 8	8.4 on 7	24.7	9	844	1201@51	340/AA/A
215/50ZR17/XL	95W		STD	BSW	09894	6 - 7.5	8.9 on 7	25.5	9	815	1521@50	340/AA/A
225/45ZR17	91W		STD	BSW	27062	7 - 8.5	8.9 on 7.5	25	9.5	833	1356@51	340/AA/A
225/55ZR17	97W		STD	BSW	09040	6 - 8	9.2 on 7	26.8	9.5	777	1609@51	340/AA/A
245/40ZR17	91W		STD	BSW	55411	8 - 9.5	9.8 on 8.5	24.7	9.5	841	1356@51	340/AA/A
245/45ZR17	95W		STD	BSW	03762	7.5 - 9	9.6 on 8	25.7	9.5	810	1521@51	340/AA/A
215/40ZR18/XL	89W		STD	BSW	16470	7 - 8.5	8.6 on 7.5	24.8	9.5	840	1279@50	340/AA/A
225/40ZR18	88W		STD	BSW	11558	7.5 - 9	9.1 on 8	25.1	9	829	1235@51	340/AA/A
225/45ZR18/XL	95W		STD	BSW	09303	7 - 8.5	8.9 on 7.5	25.9	9.5	802	1521@50	340/AA/A
235/40ZR18	91W		STD	BSW	66818	8 - 9.5	9.5 on 8.5	25.4	9.5	819	1356@51	340/AA/A
235/45ZR18/XL	98W		STD	BSW	08998	7.5 - 9	9.3 on 8	26.3	9	790	1653@50	340/AA/A
235/50ZR18	97W		STD	BSW	88750	6.5 - 8.5	9.7 on 7.5	27.3	9	762	1609@51	340/AA/A
245/40ZR18	93W		STD	BSW	26006	8 - 9.5	9.8 on 8.5	25.7	9	809	1433@51	340/AA/A
245/45ZR18	96W		STD	BSW	23012	7.5 - 9	9.6 on 8	26.7	9	780	1565@51	340/AA/A
255/35ZR18	90W		STD	BSW	09951	8.5 - 10	10.2 on 9	25	9	832	1323@51	340/AA/A
255/40ZR18	95W		STD	BSW	12571	8.5 - 10	10.2 on 9	26	9	799	1521@51	340/AA/A
265/35ZR18	93W		STD	BSW	17880	9 - 10.5	10.7 on 9.5	25.3	9	822	1433@51	340/AA/A
275/35ZR18	95W		STD	BSW	75520	9 - 11	10.9 on 9.5	25.6	9	814	1521@51	340/AA/A
275/40ZR18	99W		STD	BSW	09929	9 - 11	10.9 on 9.5	26.7	9	780	1433@51	340/AA/A
245/40ZR19/XL	98W		STD	BSW	18887	8 - 9.5	9.76 on 8.5	26.7	9	778	1653@50	340/AA/A
255/35ZR19/XL	96W		STD	BSW	12626	8.5 - 10	10.2 on 9	26	9.5	799	2041@50	340/AA/A
275/40ZR19	101W		STD	BSW	30546	9 - 11	10.9 on 9.5	27.7	9.5	751	1819@51	340/AA/A
285/35ZR19/XL	103W		STD	BSW	38139	9.5 - 11	11.42 on 10	26.8	9	774	1930@50	340/AA/A
245/45ZR20/XL	103W		STD	BSW	77147	7.5 - 9	9.6 on 8	28.7	9	726	1930@50	340/AA/A
275/40ZR20/XL	106W		STD	BSW	82193	9 - 11	10.94 on 9.5	28.6	9	726	2094@50	340/AA/A

Ultra-High Performance

BFGOODRICH® g-FORCE™ COMP-2™ A/S PLUS

Our best Ultra-High Performance all-season tire ever.



BENEFITS OF BFGOODRICH® TIRES

TRUSTED ALL-SEASON CONTROL. Improved dry and wet handling performance¹. g-FORCE™ TREAD

1. Advanced Mold Design is engineered to improve long-term wear.
2. Performance Tread Profile provides ultimate grip in hard cornering and is designed to resist irregular wear.

ADVANCED WET-ROAD HANDLING. Significantly better than the BFGoodrich® g-Force™ COMP-2™ A/S tire in wet testing². ULTIGRIP™ TECHNOLOGY

1. All-Season Compound offers our best wet and dry grip with all-season traction.
2. Directional Tread Design is engineered to deliver ultimate dry grip, wet traction and winter mobility.

PROVEN QUALITY ASSURANCE. Improved performance, with the same great treadlife warranty³. PERFORMANCE RACING CORE

1. ETEC System™ (Equal TEEnson Containment System™) designed to enhance traction at speed.
2. Dynamic Suspension System designed to increase control and maintain ride comfort.
3. g-Control™ Sidewall Inserts designed to provide immediate turning response.

¹Based on internal autocross dry and subjective wet handling results using a 2015 BMW® 328i versus the BFGoodrich® g-Force™ COMP-2™ A/S tire in size 245/40ZR18 XL 97Y. Actual on-road results may vary.

²Based on internal autocross and subjective wet handling results using a 2015 BMW® 328i versus the BFGoodrich® g-Force™ COMP-2™ A/S tire in size 245/40ZR18 XL 97Y. Actual on-road results may vary.

³Based on internal autocross dry, subjective wet and snow handling results using a 2015 BMW® 328i versus the BFGoodrich® g-Force™ COMP-2™ A/S tire in size 245/40ZR18 XL 97Y. Actual on-road results may vary.



WEAR



EFFICIENCY



HANDLING



BRAKING



COMFORT

POPULAR REPLACEMENT MARKET FITMENTS:

- Ford Mustang
- Subaru Impreza WRX STI
- Honda Civic Si
- Volkswagen Golf GTI
- Mazda MX-5 Miata
- Audi A4
- Mazda 3

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
205/45ZR16/XL	87W	M + S	45K	BSW	02422	6.5 - 7.5	8.11 on 7	23.2	9	895	1201@50	400/A/A
205/50ZR16	87W	M + S	45K	BSW	79041	5.5 - 7.5	8.43 on 6.5	24	9	863	1201@51	400/A/A
205/55ZR16	91W	M + S	45K	BSW	91132	5.5 - 7.5	8.43 on 6.5	24.8	9	836	1356@51	400/A/A
225/50ZR16	92W	M + S	45K	BSW	21425	6 - 8	9.17 on 7	24.8	9	836	1389@51	400/A/A
225/55ZR16	95W	M + S	45K	BSW	00560	6 - 8	9.17 on 7	25.7	9	808	1521@51	400/A/A
245/50ZR16	97W	M + S	45K	BSW	35032	7 - 8.5	9.96 on 7.5	25.6	9	810	1609@51	400/A/A
205/45ZR17/XL	88W	M + S	45K	BSW	49718	6.5 - 7.5	8.11 on 7	24.2	9	858	1235@50	400/A/A
205/50ZR17/XL	93Y	M + S	45K	BSW	56344	5.5 - 7.5	8.43 on 6.5	25.1	9	828	1433@50	400/A/A
215/45ZR17/XL	91W	M + S	45K	BSW	25463	7 - 8	8.39 on 7	24.6	9	844	1356@50	400/A/A

Continued ►

BFGOODRICH® g-FORCE™ COMP-2™ A/S PLUS

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG
215/50ZR17/XL	95W	M + S	45K	BSW	30364	6 - 7.5	8.9 on 7	25.5	9	815	1521@50	400/A/A
215/55ZR17/XL	98W	M + S	45K	BSW	03393	6 - 7.5	8.9 on 7	26.3	9	791	1477@50	400/A/A
225/45ZR17/XL	94W	M + S	45K	BSW	68663	7 - 8.5	8.86 on 7.5	24.9	9	833	1477@50	400/A/A
225/50ZR17	94Y	M + S	45K	BSW	10187	6 - 8	9.17 on 7	25.9	9	803	1477@51	400/A/A
225/55ZR17	97W	M + S	45K	BSW	05801	6 - 8	9.17 on 7	26.7	9	777	1609@51	400/A/A
235/45ZR17/XL	97W	M + S	45K	BSW	21745	7.5 - 9	9.29 on 8	25.3	9	821	1609@50	400/A/A
235/50ZR17	96W	M + S	45K	BSW	69343	6.5 - 8.5	9.65 on 7.5	26.3	9	791	1565@51	400/A/A
235/55ZR17/XL	103W	M + S	45K	BSW	17488	6.5 - 8.5	9.65 on 7.5	27.1	9	766	1929@50	400/A/A
245/40ZR17	91W	M + S	45K	BSW	78881	8 - 9.5	9.76 on 8.5	24.7	9	841	1356@51	400/A/A
245/45ZR17/XL	99W	M + S	45K	BSW	11005	7.5 - 9	9.57 on 8	25.6	9	810	1709@50	400/A/A
255/40ZR17	94W	M + S	45K	BSW	20437	8.5 - 10	10.24 on 9	25	9	831	1477@51	400/A/A
275/40ZR17	98W	M + S	45K	BSW	07705	9 - 11	10.94 on 9.5	25.6	9	810	1653@51	400/A/A
215/45ZR18/XL	93W	M + S	45K	BSW	29567	7 - 8	8.39 on 7	25.6	9	812	1433@50	400/A/A
225/40ZR18/XL	92W	M + S	45K	BSW	02037	7.5 - 9	9.06 on 8	25	9	829	1389@50	400/A/A
225/45ZR18/XL	95Y	M + S	45K	BSW	60923	7 - 8.5	8.86 on 7.5	25.9	9	802	1521@50	400/A/A
225/50ZR18/XL	99W	M + S	45K	BSW	25864	6 - 8	9.17 on 7	26.8	9	774	1521@50	400/A/A
235/40ZR18/XL	95W	M + S	45K	BSW	11407	8 - 9.5	9.49 on 8.5	25.3	9	819	1521@50	400/A/A
235/45ZR18/XL	98W	M + S	45K	BSW	48272	7.5 - 9	9.29 on 8	26.3	9	790	1653@50	400/A/A
235/50ZR18/XL	101W	M + S	45K	BSW	86885	6.5 - 8.5	9.65 on 7.5	27.2	9	762	1609@50	400/A/A
245/40ZR18/XL	97Y	M + S	45K	BSW	62014	8 - 9.5	9.76 on 8.5	25.7	9	809	1609@50	400/A/A
245/45ZR18/XL	100Y	M + S	45K	BSW	50280	7.5 - 9	9.57 on 8	26.6	9	780	1565@50	400/A/A
255/35ZR18/XL	94W	M + S	45K	BSW	03799	8.5 - 10	10.24 on 9	25	9	832	1477@50	400/A/A
255/40ZR18/XL	99W	M + S	45K	BSW	04086	8.5 - 10	10.24 on 9	26	9	799	1709@50	400/A/A
255/45ZR18	99W	M + S	45K	BSW	18395	8 - 9.5	10.04 on 8.5	27	9	769	1709@50	400/A/A
265/35ZR18/XL	97W	M + S	45K	BSW	77228	9 - 10.5	10.67 on 9.5	25.3	9	822	1609@50	400/A/A
275/35ZR18/XL	99W	M + S	45K	BSW	43998	9 - 11	10.94 on 9.5	25.5	9	814	1521@50	400/A/A
275/40ZR18	99W	M + S	45K	BSW	87293	9 - 11	10.94 on 9.5	26.6	9	780	1709@51	400/A/A
225/40ZR19/XL	93W	M + S	45K	BSW	95455	7.5 - 9	9.06 on 8	26.1	9	797	1433@50	400/A/A
225/45ZR19/XL	96W	M + S	45K	BSW	00905	7 - 8.5	8.86 on 7.5	26.9	9	771	1389@50	400/A/A
245/35ZR19/XL	93W	M + S	45K	BSW	05192	8 - 9.5	9.76 on 8.5	25.7	9	807	1433@50	400/A/A
245/40ZR19/XL	98Y	M + S	45K	BSW	18288	8 - 9.5	9.76 on 8.5	26.7	9	778	1477@50	400/A/A
245/45ZR19/XL	102W	M + S	45K	BSW	30693	7.5 - 9	9.57 on 8	27.6	9	751	1653@50	400/A/A
245/50ZR19/XL	105W	M + S	45K	BSW	03637	7 - 8.5	9.96 on 7.5	28.7	9	725	2041@50	400/A/A
255/35ZR19/XL	96W	M + S	45K	BSW	36658	8.5 - 10	10.24 on 9	26	9	799	1565@50	400/A/A
255/40ZR19/XL	100Y	M + S	45K	BSW	00544	8.5 - 10	10.24 on 9	27	9	769	1764@50	400/A/A
275/35ZR19/XL	100W	M + S	45K	BSW	31975	9 - 11	10.94 on 9.5	26.5	9	783	1565@50	400/A/A
275/40ZR19/XL	105W	M + S	45K	BSW	95760	9 - 11	10.94 on 9.5	27.6	9	751	1819@50	400/A/A
285/35ZR19/XL	103Y	M + S	45K	BSW	19918	9.5 - 11	11.42 on 10	26.8	9	774	1929@50	400/A/A
245/35ZR20/XL	95W	M + S	45K	BSW	15532	8 - 9.5	9.76 on 8.5	26.7	9	777	1521@50	400/A/A
245/40ZR20/XL	99W	M + S	45K	BSW	50355	8 - 9.5	9.76 on 8.5	27.7	9	750	1709@50	400/A/A
245/45ZR20/XL	103Y	M + S	45K	BSW	24329	7.5 - 9	9.57 on 8	28.6	9	726	1929@50	400/A/A
255/35ZR20/XL	97W	M + S	45K	BSW	61319	8.5 - 10	10.24 on 9	27	9	770	1609@50	400/A/A
255/45ZR20	101Y	M + S	45K	BSW	87039	8 - 9.5	10.04 on 8.5	29	9	716	1819@51	400/A/A
275/35ZR20/XL	102W	M + S	45K	BSW	43025	9 - 11	10.94 on 9.5	27.5	9	755	1874@50	400/A/A
275/40ZR20/XL	106Y	M + S	45K	BSW	93883	9 - 11	10.94 on 9.5	28.6	9	726	2094@50	400/A/A
285/35ZR20/XL	104Y	M + S	45K	BSW	97470	9.5 - 11	11.42 on 10	27.8	9	746	1764@50	400/A/A
305/35ZR20	104Y	M + S	45K	BSW	76991	10 - 12	12.32 on 11	28.4	9	732	1984@51	400/A/A



*PERFORMANCE/
TOURING*



PERFORMANCE/TOURING

We don't believe you have to trade fun for practicality. With the right tire, you can find the driving spirit in your everyday car.



KEY TIRE LINE COMPARISONS	WEAR	EFFICIENCY	HANDLING	BRAKING	COMFORT
Advantage Control™	10	8	9	10	10
Radial T/A®	7	5	8	7	7
Elite-Force T/A®	9	9	10	10	9

BFGOODRICH® ADVANTAGE CONTROL™

The BFGoodrich® Advantage Control™ tire gives you the peace of mind to roam confidently. Delivering all-season traction and everyday control, backed by over 150 years of brand credibility.



BENEFITS OF BFGOODRICH® TIRES

ALL-SEASON, ALL-PURPOSE: Stops 8 feet shorter in the wet than leading competitive tires¹.

Active Sipe Technology provides more Biting Edges for significantly increased wet traction. Advanced All-Season Tread Compounds are silica-infused to deliver outstanding grip year-round. Aqua-Flume™ Technology is a curvilinear groove network designed to disperse water from under the contact patch.

A MORE ENJOYABLE RIDE: Overall quieter than a leading competitor². New tread and architectural design score better overall for subjective noise than a leading competitor².

Computer Optimized Footprint manages treadwear evolution for longer life and a quiet ride. Next-generation g-Wedge™ Sidewall Stabilizer firms the sidewall for crisp handling and a comfortable ride.

ADVANCED MILEAGE: Backed by a 75,000-Mile Warranty³.

Full-depth tread features maintain a consistent performance and look throughout the life of the tire.

60-DAY SATISFACTION GUARANTEE

60-DAY SATISFACTION GUARANTEE⁴.

We're confident you'll love your new BFGoodrich® Advantage Control™ replacement tires. So confident, in fact, that we back your purchase with a 60-Day Satisfaction Guarantee. If you're not 100% satisfied with your new tires, just bring the tires and original sales receipt back to the place where you bought the tires within 60 days of your purchase and we will gladly exchange them for a new set of tires of equal or lesser value.

¹Based on internal wet braking results from 50 MPH using a 2017 Honda® Accord versus the General® Altimax® and Cooper® CS5 Ultra Touring™ tires in size 215/60R16 95V. Actual on-road results may vary.

²Based on internal on-track noise test results using a 2017 Honda® Accord versus the YOKOHAMA® Ascend GT tire in size 205/55R16 XL 91H. Actual on-road results may vary.

³75,000-mile limited treadlife warranty – T/H rated; 65,000-mile limited treadlife warranty – V/W rated.

⁴Guarantee applies to up to six (6) tires per customer. Guarantee applies only to tires that were purchased and mounted and does not apply to exchanged tires that were provided under this guarantee. The guarantee does not include the cost of valve stems. Tires that are damaged due to misuse or misapplication, road hazards, mechanical problems related to the vehicle, use in any racing-related activities or competitive events, or tires that are removed from the original vehicle on which they were installed are excluded from this guarantee.



POPULAR REPLACEMENT MARKET FITMENTS:

- Honda Accord
- Toyota Camry
- Honda CR-V
- Toyota RAV4
- Subaru Crosstrek
- Mazda 3 and 6
- Nissan Altima



Experienced driver depicted.

BFGOODRICH® ADVANTAGE CONTROL™

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
185/65R14	86H	M + S	75K	BSW	06015	5 - 6.5	7.44 on 5.5	23.4	11.5	887	1168@44	700/B/A
175/65R15	84H	M + S	75K	BSW	62286	5 - 6	6.97 on 5	23.9	11.5	867	1102@44	700/B/A
185/60R15	84H	M + S	75K	BSW	61141	5 - 6.5	7.44 on 5.5	23.7	11.5	876	1102@44	700/B/A
185/65R15	88H	M + S	75K	BSW	12354	5 - 6.5	7.44 on 5.5	24.4	11.5	851	1235@44	700/B/A
195/60R15	88H	M + S	75K	BSW	11824	5.5 - 7	7.91 on 6	24.2	11.5	859	1235@44	700/B/A
195/65R15	91H	M + S	75K	BSW	91365	5.5 - 7	7.91 on 6	25	11.5	832	1356@44	700/B/A
205/60R15	91H	M + S	75K	BSW	97977	5.5 - 7.5	8.23 on 6	24.6	11.5	842	1356@44	700/B/A
205/65R15	94H	M + S	75K	BSW	54053	5.5 - 7.5	8.23 on 6	25.4	11.5	817	1477@44	700/B/A
205/65R15/XL	99H	M + S	75K	BSW	71973	5.5 - 7.5	8.23 on 6	25.4	11.5	817	1709@50	700/B/A
215/70R15	98H	M + S	75K	BSW	00939	5.5 - 7	8.7 on 6.5	26.8	11.5	774	1653@44	700/B/A
195/55R16	87V	M + S	65K	BSW	27963	5.5 - 7	7.91 on 6	24.4	10.5	852	1201@44	600/B/A
205/50R16	87V	M + S	65K	BSW	24682	5.5 - 7.5	8.43 on 6.5	24	10.5	863	1201@44	600/B/A
205/55R16	91H	M + S	75K	BSW	90759	5.5 - 7.5	8.43 on 6.5	24.8	11.5	836	1356@44	700/B/A
205/60R16	92H	M + S	75K	BSW	07227	5.5 - 7.5	8.23 on 6	25.6	11.5	810	1389@44	700/B/A
205/60R16	92V	M + S	65K	BSW	00555	5.5 - 7.5	8.23 on 6	25.6	10.5	810	1389@44	600/B/A
205/65R16	95H	M + S	75K	BSW	34591	5.5 - 7.5	8.23 on 6	26.4	11.5	786	1521@44	700/B/A
215/55R16/XL	97H	M + S	75K	BSW	34873	6 - 7.5	8.9 on 7	25.2	11.5	823	1609@50	700/B/A
215/60R16	95H	M + S	75K	BSW	17593	6 - 7.5	8.7 on 6.5	26.1	11.5	796	1521@44	700/B/A
215/60R16	95V	M + S	65K	BSW	53186	6 - 7.5	8.7 on 6.5	26.1	10.5	796	1521@44	600/B/A
215/65R16	98H	M + S	75K	BSW	18477	6 - 7.5	8.7 on 6.5	27	11.5	770	1653@44	700/B/A
215/70R16	100H	M + S	75K	BSW	01041	5.5 - 7	8.7 on 6.5	27.8	11.5	746	1764@44	700/B/A
225/60R16	98H	M + S	75K	BSW	25822	6 - 8	8.98 on 6.5	26.6	11.5	782	1653@44	700/B/A
225/65R16	100H	M + S	75K	BSW	09518	6 - 8	8.98 on 6.5	27.4	11.5	757	1764@44	700/B/A
235/60R16	100H	M + S	75K	BSW	15025	6.5 - 8.5	9.45 on 7	27	11.5	768	1764@44	700/B/A
235/65R16	103H	M + S	75K	BSW	28566	6.5 - 8.5	9.45 on 7	28	11.5	742	1929@44	700/B/A
235/70R16	106T	M + S	75K	BSW	02584	6 - 8	9.45 on 7	28.9	11.5	718	2094@44	700/B/A
205/50R17/XL	93V	M + S	65K	BSW	64709	5.5 - 7.5	8.43 on 6.5	25.1	10.5	828	1433@50	600/B/A
205/55R17/XL	95H	M + S	75K	BSW	49186	5.5 - 7.5	8.43 on 6.5	25.9	11.5	803	1521@50	700/B/A
215/45R17	87V	M + S	65K	BSW	59917	7 - 8	8.39 on 7	24.6	10.5	844	1201@44	600/B/A
215/45R17	87W	M + S	65K	BSW	91302	7 - 8	8.39 on 7	24.6	10.5	844	1201@44	600/B/A
215/50R17/XL	95V	M + S	65K	BSW	11194	6 - 7.5	8.9 on 7	25.5	10.5	815	1521@50	600/B/A
215/55R17	94H	M + S	75K	BSW	74825	6 - 7.5	8.9 on 7	26.3	11.5	791	1477@44	700/B/A
215/55R17	94V	M + S	65K	BSW	21590	6 - 7.5	8.9 on 7	26.3	10.5	791	1477@44	600/B/A
215/60R17	96H	M + S	75K	BSW	35649	6 - 7.5	8.7 on 6.5	27.1	11.5	766	1565@44	700/B/A
215/65R17	99H	M + S	75K	BSW	73126	6 - 7.5	8.7 on 6.5	28	11.5	742	1709@44	700/B/A

Continued ►

See Important Product Information section at the back of the book.

BFGOODRICH® ADVANTAGE CONTROL™

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG
225/45R17	91H	M + S	75K	BSW	40475	7 - 8.5	8.86 on 7.5	24.9	11.5	833	1356@44	700/B/A
225/50R17	94H	M + S	75K	BSW	66078	6 - 8	9.17 on 7	25.9	11.5	803	1477@44	700/B/A
225/50R17	94V	M + S	65K	BSW	13341	6 - 8	9.17 on 7	25.9	10.5	803	1477@44	600/B/A
225/55R17/XL	101H	M + S	75K	BSW	98162	6 - 8	9.17 on 7	26.7	11.5	777	1819@50	700/B/A
225/55R17/XL	101W	M + S	65K	BSW	24297	6 - 8	9.17 on 7	26.7	10.5	777	1819@50	600/B/A
225/55R17	97H	M + S	75K	BSW	63154	6 - 8	9.17 on 7	26.7	11.5	777	1609@44	700/B/A
225/55R17	97V	M + S	65K	BSW	94580	6 - 8	9.17 on 7	26.7	10.5	777	1609@44	600/B/A
225/60R17	99H	M + S	75K	BSW	31398	6 - 8	8.98 on 6.5	27.6	11.5	753	1709@44	700/B/A
225/65R17	102H	M + S	75K	BSW	68173	6 - 8	8.98 on 6.5	28.5	11.5	730	1874@44	700/B/A
235/45R17/XL	97H	M + S	75K	BSW	03789	7.5 - 9	9.29 on 8	25.3	11.5	821	1609@50	700/B/A
235/45R17/XL	97W	M + S	65K	BSW	09236	7.5 - 9	9.29 on 8	25.3	10.5	821	1609@50	600/B/A
235/50R17	96H	M + S	75K	BSW	02006	6.5 - 8.5	9.65 on 7.5	26.3	11.5	791	1565@44	700/B/A
235/50R17	96W	M + S	65K	BSW	02994	6.5 - 8.5	9.65 on 7.5	26.3	10.5	791	1565@44	600/B/A
235/55R17	99H	M + S	75K	BSW	07652	6.5 - 8.5	9.65 on 7.5	27.1	11.5	766	1709@44	700/B/A
235/60R17	102H	M + S	75K	BSW	02478	6.5 - 8.5	9.45 on 7	28.1	11.5	740	1874@44	700/B/A
235/65R17	104H	M + S	75K	BSW	28399	6.5 - 8.5	9.45 on 7	29	11.5	716	1984@44	700/B/A
235/65R17	104V	M + S	65K	BSW	03632	6.5 - 8.5	9.45 on 7	29	10.5	716	1984@44	600/B/A
245/65R17	107T	M + S	75K	BSW	29387	7 - 8.5	9.76 on 7	29.5	11.5	704	2150@44	700/B/A
215/55R18	95H	M + S	75K	BSW	37910	6 - 7.5	8.9 on 7	27.2	11.5	762	1521@44	700/B/A
225/40R18/XL	92W	M + S	65K	BSW	13945	7.5 - 9	9.06 on 8	25	10.5	829	1389@50	600/B/A
225/45R18/XL	95V	M + S	65K	BSW	50840	7 - 8.5	8.86 on 7.5	25.9	10.5	802	1521@50	600/B/A
225/50R18	95H	M + S	75K	BSW	49333	6 - 8	9.17 on 7	26.8	11.5	774	1521@44	700/B/A
225/50R18/XL	99W	M + S	65K	BSW	71758	6 - 8	9.17 on 7	26.8	10.5	774	1709@50	600/B/A
225/55R18	98H	M + S	75K	BSW	17818	6 - 8	9.17 on 7	27.7	11.5	749	1653@44	700/B/A
225/55R18	98V	M + S	65K	BSW	60675	6 - 8	9.17 on 7	27.7	10.5	749	1653@44	600/B/A
225/60R18	100H	M + S	75K	BSW	47859	6 - 8	8.98 on 6.5	28.6	11.5	727	1764@44	700/B/A
225/60R18	100V	M + S	65K	BSW	84138	6 - 8	8.98 on 6.5	28.6	10.5	727	1764@44	600/B/A
235/40R18/XL	95W	M + S	65K	BSW	21295	8 - 9.5	9.49 on 8.5	25.3	10.5	819	1521@50	600/B/A
235/45R18/XL	98V	M + S	65K	BSW	67114	7.5 - 9	9.29 on 8	26.3	10.5	790	1653@50	600/B/A
235/50R18	97V	M + S	65K	BSW	91494	6.5 - 8.5	9.65 on 7.5	27.2	10.5	762	1609@44	600/B/A
235/55R18	100H	M + S	75K	BSW	54029	6.5 - 8.5	9.65 on 7.5	28.1	11.5	739	1764@44	700/B/A
235/60R18/XL	107H	M + S	75K	BSW	58194	6.5 - 8.5	9.45 on 7	29	11.5	715	2149@50	700/B/A
235/60R18/XL	107V	M + S	65K	BSW	60593	6.5 - 8.5	9.45 on 7	29	10.5	715	2149@50	600/B/A
235/65R18	106H	M + S	75K	BSW	06377	6.5 - 8.5	9.45 on 7	30	10.5	692	2094@44	700/B/A

Continued ➤

See Important Product Information section at the back of the book.

BFGOODRICH® ADVANTAGE CONTROL™

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
245/40R18/XL	97V	M + S	65K	BSW	02922	8 - 9.5	9.76 on 8.5	25.7	10.5	809	1609@50	600/B/A
245/40R18/XL	97W	M + S	65K	BSW	35730	8 - 9.5	9.76 on 8.5	25.7	10.5	809	1609@50	600/B/A
245/45R18/XL	100V	M + S	65K	BSW	03707	7.5 - 9	9.57 on 8	26.6	10.5	780	1764@50	600/B/A
245/45R18	96V	M + S	65K	BSW	18136	7.5 - 9	9.57 on 8	26.6	10.5	780	1565@44	600/B/A
245/50R18	100V	M + S	65K	BSW	77919	7 - 8.5	9.96 on 7.5	27.6	10.5	751	1764@44	600/B/A
245/50R18/XL	104V	M + S	65K	BSW	72672	7 - 8.5	9.96 on 7.5	27.6	10.5	751	1984@50	600/B/A
245/55R18	103V	M + S	65K	BSW	38227	7 - 8.5	9.96 on 7.5	28.6	10.5	727	1929@44	600/B/A
245/60R18	105H	M + S	75K	BSW	05048	7 - 8.5	9.76 on 7	29.5	11.5	703	1854@44	700/B/A
255/55R18/XL	109V	M + S	65K	BSW	38080	7 - 9	10.43 on 8	29	10.5	717	2064@50	600/B/A
255/60R18/XL	112V	M + S	65K	BSW	06701	7 - 9	10.24 on 7.5	30	10.5	692	2469@50	600/B/A
225/55R19	99V	M + S	65K	BSW	05785	6 - 8	9.17 on 7	28.7	10.5	723	1709@44	600/B/A
235/40R19/XL	96V	M + S	65K	BSW	41581	8 - 9.5	9.49 on 8.5	26.4	10.5	787	1565@50	600/B/A
235/45R19	95H	M + S	75K	BSW	03963	7.5 - 9	9.29 on 8	27.3	11.5	760	1521@44	700/B/A
235/50R19/XL	103H	M + S	75K	BSW	32076	6.5 - 8.5	9.65 on 7.5	28.3	11.5	735	1929@50	700/B/A
235/50R19	99V	M + S	65K	BSW	06442	6.5 - 8.5	9.65 on 7.5	28.3	10.5	735	1709@44	600/B/A
235/55R19	101H	M + S	75K	BSW	66683	6.5 - 8.5	9.65 on 7.5	29.1	11.5	713	1819@44	700/B/A
235/55R19	101V	M + S	65K	BSW	01410	6.5 - 8.5	9.65 on 7.5	29.1	10.5	713	1819@44	600/B/A
245/45R19	98V	M + S	65K	BSW	92480	7.5 - 9	9.57 on 8	27.6	10.5	751	1653@44	600/B/A
245/55R19	103H	M + S	75K	BSW	17779	7 - 8.5	9.96 on 7.5	29.6	11.5	702	1929@44	700/B/A
255/50R19/XL	107V	M + S	65K	BSW	67453	7 - 9	10.43 on 8	29	10.5	715	2149@50	600/B/A
255/60R19	109H	M + S	75K	BSW	33985	7 - 9	10.24 on 7.5	31	11.5	670	2271@44	700/B/A
235/55R20	102H	M + S	75K	BSW	35657	6.5 - 8.5	9.65 on 7.5	30.1	11.5	690	1874@44	700/B/A
235/55R20	102V	M + S	65K	BSW	72424	6.5 - 8.5	9.65 on 7.5	30.1	10.5	690	1874@44	600/B/A
245/45R20	99V	M + S	65K	BSW	02390	7.5 - 9	9.57 on 8	28.6	10.5	726	1709@44	600/B/A
245/50R20	102H	M + S	75K	BSW	28463	7 - 8.5	9.96 on 7.5	29.6	11.5	701	1874@44	700/B/A
245/50R20	102V	M + S	65K	BSW	02465	7 - 8.5	9.96 on 7.5	29.6	10.5	701	1874@44	600/B/A
245/60R20	107H	M + S	75K	BSW	51386	7 - 8.5	9.76 on 7	31.5	11.5	659	2149@44	700/B/A
255/45R20	101W	M + S	65K	BSW	01805	8 - 9.5	10.04 on 8.5	29	10.5	716	1819@44	600/B/A
255/50R20/XL	109V	M + S	65K	BSW	14008	7 - 9	10.43 on 8	30	10.5	691	2271@50	600/B/A
255/55R20/XL	110H	M + S	75K	BSW	24766	7 - 9	10.43 on 8	31	11.5	671	2337@50	700/B/A
265/50R20	107T	M + S	75K	BSW	03629	7.5 - 9.5	10.91 on 8.5	30.4	11.5	683	2150@44	700/B/A
265/50R20	107V	M + S	65K	BSW	30990	7.5 - 9.5	10.91 on 8.5	30.4	10.5	683	2150@44	600/B/A
275/45R20/XL	110V	M + S	65K	BSW	04744	8.5 - 10.5	10.75 on 9	29.7	10.5	699	2337@50	600/B/A
275/45R21/XL	110W	M + S	65K	BSW	03475	8.5 - 10.5	10.75 on 9	30.7	10.5	676	2149@51	600/B/A

BFGOODRICH® RADIAL T/A®

An American performance icon.



ALL-SEASON



BENEFITS OF BFGOODRICH® TIRES

Wide profile styling for modern muscle.
Raised white letter and wide profile styling.

Superb lateral stability and steering response.
Classic look with modern technology.

With 46 years of real racing heritage and technology.
North America's first Performance radial tire.

High performance with low noise levels.
Unique tread block phasing.

Exceptional wet and dry traction and control, with long, even wear.
Variable groove angle geometry and performance tread compounding.



WEAR



EFFICIENCY



HANDLING



BRAKING



COMFORT

POPULAR REPLACEMENT MARKET FITMENTS:

- Hot Rods and Tuners
- Vintage Performance Cars
- American Muscle



BFGOODRICH® RADIAL T/A®

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
P205/60R13	86S	M + S	STD	RWL	54986	5.5 - 7.5	8.2 on 6	22.7	11	916	1179@35	360/A/B
P205/70R14	93S	M + S	STD	RWL	23353	5 - 7	8.2 on 6	25.3	11	821	1433@35	400/A/B
P215/60R14	91S	M + S	STD	RWL	87370	6 - 7.5	8.7 on 6.5	24.1	11	861	1345@35	400/A/B
P215/70R14	96S	M + S	STD	RWL	13823	5.5 - 7	8.7 on 6.5	25.9	12	803	1554@35	400/A/B
P225/60R14	94S	M + S	STD	RWL	03769	6 - 8	8.98 on 6.5	24.6	11	844	1455@35	400/A/B
P225/70R14	98S	M + S	STD	RWL	78138	6 - 7.5	8.98 on 6.5	26.4	12	786	1675@35	400/A/B
P235/60R14	96S	M + S	STD	RWL	38765	6.5 - 8.5	9.45 on 7	25.1	11	828	1565@35	400/A/B
P245/60R14	98S	M + S	STD	RWL	87449	7 - 8.5	9.76 on 7	25.5	11	813	1675@35	400/A/B
P155/80R15	83S	M + S	STD	RWL	06462	4.5 - 5.5	6.2 on 4.5	24.8	12	840	1069@35	400/A/B
P195/60R15	87S	M + S	STD	RWL	96408	5.5 - 7	7.91 on 6	24.2	11	859	1190@35	400/A/B
P205/60R15	90S	M + S	STD	RWL	94684	5.5 - 7.5	8.2 on 6	24.6	11	842	1301@35	400/A/B
P215/60R15	93S	M + S	STD	RWL	35841	6 - 7.5	8.7 on 6.5	25.1	11	827	1411@35	400/A/B
P215/65R15	95S	M + S	STD	RWL	15015	6 - 7.5	8.7 on 6.5	26	10.5	799	1510@35	400/A/B
P215/70R15	97S	M + S	STD	RWL	94777	5.5 - 7	8.7 on 6.5	26.8	12	774	1620@35	400/A/B
P225/60R15	95S	M + S	STD	RWL	10971	6 - 8	8.98 on 6.5	25.6	11	812	1521@35	400/A/B
P225/70R15	100S	M + S	STD	RWL	72175	6 - 7.5	8.98 on 6.5	27.4	12	758	1753@35	400/A/B
P235/60R15	98S	M + S	STD	RWL	19922	6.5 - 8.5	9.45 on 7	26.1	11	797	1642@35	400/A/B
P235/70R15	102S	M + S	STD	RWL	58935	6 - 8	9.45 on 7	27.9	12	743	1896@35	400/A/B
P245/60R15	100S	M + S	STD	RWL	99620	7 - 8.5	9.8 on 7	26.6	11	783	1753@35	400/A/B
P255/60R15	102S	M + S	STD	RWL	29893	7 - 9	10.2 on 7.5	27.1	11	769	1885@35	400/A/B
P255/70R15	108S	M + S	STD	RWL	07685	6.5 - 8.5	10.2 on 7.5	29.1	12	715	2183@35	400/A/B
P275/60R15	107S	M + S	STD	RWL	61789	7.5 - 9.5	11 on 8	28	11	743	2149@35	400/A/B
P295/50R15	105S	M + S	STD	RWL	12707	8 - 10.5	12.1 on 9.5	26.6	11	780	2061@35	400/A/B

BFGOODRICH® ELITE-FORCE T/A®

An all-season, dedicated, pursuit-rated tire designed for those requiring performance on demand.



ALL-SEASON



BENEFITS OF BFGOODRICH® TIRES

Better wet and dry handling.

3-D SipeLock™ Technology provides more Biting Edges for significantly increased wet and light snow traction. Advanced All-Season Tread Compounds are silica-infused compounds to deliver outstanding grip year-round.

Improved wear for higher mileage.

Computer Optimized Footprint manages treadwear evolution for longer life and a quiet ride. 3-D SipeLock™ Technology is designed to lock together under the tire's footprint, providing stability for longer wear. Full-depth tread features maintain a consistent performance and look throughout the life of the tire.

Improved wet grip.

Next-generation ETEC System™ (Equal TEnsion Containment System™) maintains optimal footprint shape during cornering and high-speed situations¹. Next-generation g-Wedge™ Sidewall Stabilizer firms the sidewall for crisp handling and a comfortable ride.

¹All results based on test comparisons against existing in-market BFGoodrich® Tires products designated as pursuit tires and used for potential pursuit purposes, including the BFGoodrich® Advantage T/A® Sport tire.



Tire Size	Service Description	Other	Limited Warranty	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
225/60R16/XL	102V	M + S	STD	BSW	14787	6 - 8	8.98 on 6.5	26.6	10	782		700/A/A
235/50R17/XL	100W	M + S	STD	BSW	17293	6.5 - 8.5	9.65 on 7.5	26.3	10	791		700/A/A
235/55R17/XL	103W	M + S	STD	BSW	10404	6.5 - 8.5	9.65 on 7.5	27.1	10	766		700/A/A
255/70R17/XL	116V	M + S	STD	BSW	30075	6.5 - 8.5	10.24 on 7.5	31.1	10.5	669		700/A/A
265/60R17/XL	108V	M + S	STD	BSW	30457	8 - 10	10.71 on 8	29.5	10.5	704		700/A/A
265/70R17/XL	116T	M + S	STD	BSW	31551	7 - 9	10.71 on 8	31.6	10.5	657		700/A/A
225/60R18/XL	104W	M + S	STD	BSW	10157	6 - 8	8.98 on 6.5	28.6	10	727		700/A/A
235/50R18/XL	101W	M + S	STD	BSW	19449	6.5 - 8.5	9.65 on 7.5	27.2	10	762		700/A/A
235/55R18/XL	104W	M + S	STD	BSW	58791	6.5 - 8.5	9.65 on 7.5	28.1	10	739		700/A/A
245/55R18/XL	107V	M + S	STD	BSW	05067	7 - 8.5	9.96 on 7.5	28.6	10.5	727		700/A/A
245/60R18/XL	109V	M + S	STD	BSW	08272	7 - 8.5	9.76 on 7	29.5	10.5	703		700/A/A
255/60R18/XL	112V	M + S	STD	BSW	91852	7 - 9	10.24 on 7.5	30	10.5	692		700/A/A
265/60R18/XL	114V	M + S	STD	BSW	13552	7.5 - 9.5	10.71 on 8	30.5	10.5	682		700/A/A
275/65R18/XL	116T	M + S	STD	BSW	32491	7.5 - 9.5	10.98 on 8	32	10.5	648		700/A/A
265/50R20/XL	111V	M + S	STD	BSW	46739	7.5 - 9.5	10.91 on 8.5	30.4	10.5	683		700/A/A
275/55R20/XL	117V	M + S	STD	BSW	37636	7.5 - 9.5	11.18 on 8.5	31.8	10.5	652		700/A/A
285/45R22/XL	114V	M + S	STD	BSW	72681	9 - 10.5	11.22 on 9.5	32	10.5	648		700/A/A





LIGHT TRUCK/ SUV

Experienced driver depicted.

LIGHT TRUCK/SUV

On the jobsite or out in the places you fish, camp or hunt, trucks and SUVs are made to work hard. And play even harder.



KEY TIRE LINE COMPARISONS	WEAR	EFFICIENCY	OFF-ROAD	BRAKING	COMFORT
All-Terrain T/A® KO2	9	6	8	7	7
Mud-Terrain T/A® KM3	7	4	10	6	5
Mud-Terrain T/A® KM2	7	4	9	6	5
Trail-Terrain T/A®	8	8	6	8	9
Advantage T/A® Sport LT	9	9	3	9	10

BFGOODRICH® ALL-TERRAIN T/A® KO2

Our toughest all-terrain tire. Ever. Now backed by a 50,000-Mile Warranty and 60-Day Satisfaction Guarantee³.



BENEFITS OF BFGOODRICH® TIRES

20% tougher sidewalls¹.

CoreGard™ Technology: Derived from the race-proven BFGoodrich® Baja T/A® KR2 tire.

1. Split- and bruise-resistant sidewall rubber.
2. Increased rubber thickness.
3. Advanced Deflection Design deflects protruding objects from snagging and splitting the sidewall.

50,000-mile manufacturer's treadwear limited warranty across all replacement sizes².

1. Locking 3-D Sipes provide increased tread block stability for more even wear over the long haul.
2. Advanced tire footprint shape more evenly distributes stress for longer, more uniform wear.


Aggressive all-terrain traction to confidently get where you want to go³.

1. Serrated shoulder design provides increased mud, snow and rock traction, especially in aired-down driving situations.
2. Interlocking tread elements maximize traction and handling on- and off-road by stabilizing the tread center and providing Biting Edges for improved traction.
3. Three-peak mountain snowflake symbol: Exceeds U.S. Tire Manufacturers Association (USTMA) Severe Snow Traction performance requirements.

60-Day Satisfaction Guarantee⁴.

We're confident you'll love your new BFGoodrich® All-Terrain T/A® KO2 replacement tires. So confident, in fact, that we back your purchase with a 60-Day Satisfaction Guarantee. If you're not 100% satisfied with your new tires, just bring the tires and original sales receipt back to the place where you bought the tires within 60 days of your purchase and we will gladly exchange them for a new set of tires of equal or lesser value.

**60-DAY
SATISFACTION
GUARANTEE**

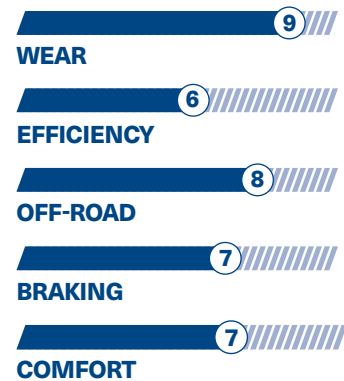

ORIGINAL EQUIPMENT FITMENTS:

- Ford Bronco
- Ford Bronco Raptor
- Ford F-150 Raptor
- Jeep Wrangler JK
- Jeep Wrangler JL

¹Improvement depends on the size of the tire purchased. 20% improvement based on internal sidewall splitting test results derived from a simulated sidewall aggression testing machine (patent pending US20120245859A1) vs. the BFGoodrich® All-Terrain T/A® KO tire in size LT265/70R17. Actual on-road results may vary.

²Excludes Original Equipment tires.

³Snow: Based on third-party snow traction tests vs. the BFGoodrich® All-Terrain T/A® KO tire in size LT265/70R17 using the ASTM F1805 Test. Mud Traction: Based on internal subjective mud testing vs. the BFGoodrich® All-Terrain T/A® KO tire in size LT265/70R17.

⁴Guarantee applies to up to six (6) tires per customer. Guarantee applies only to tires that were purchased and mounted and does not apply to exchanged tires that were provided under this guarantee. The guarantee does not include the cost of valve stems. Tires that are damaged due to misuse or misapplication, road hazards, mechanical problems related to the vehicle, use in any racing-related activities or competitive events, or tires that are removed from the original vehicle on which they were installed are excluded from guarantee.

BFGOODRICH® ALL-TERRAIN T/A® KO2

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG	OE FITMENTS
30x9.50R15/C	104S	M + S, 3PMSF	50K	RWL	64055	6.5 - 8.5	9.5 on 7.5	29.5	15	705	1990@50		
31x10.50R15/C	109S	M + S, 3PMSF	50K	RWL	69948	7 - 9	10.5 on 8.5	30.5	15	682	2270@50		
32x11.50R15/C	113R	M + S, 3PMSF	50K	RWL	13079	8 - 10	11.5 on 9	31.5	15	659	2535@50		
33x10.50R15/C	114R	M + S, 3PMSF	50K	RWL	11548	7 - 9	10.5 on 8.5	32.5	15	640	2600@50		
33x12.50R15/C	108R	M + S, 3PMSF	50K	RWL	37881	8.5 - 11	12.5 on 10	32.5	15	640	2205@35		
35x12.50R15/C	113Q	M + S, 3PMSF	50K	RWL	33572	8.5 - 11	12.5 on 10	34.5	15	602	2535@35		
33x12.50R17/E	120S	M + S, 3PMSF	50K	RBL	36394	8.5 - 11	12.5 on 10	32.5	15	640	3085@65		
34x10.50R17/D	120R	M + S, 3PMSF	50K	RWL	91644	7 - 9	10.5 on 8.5	33.5	15	621	3085@65		
35x12.50R17/E	121R	M + S, 3PMSF	50K	RWL	66539	8.5 - 11	12.5 on 10	34.5	15	602	3195@65		
37x12.50R17/C	116S	M + S, 3PMSF	50K	RBL	80088	8.5 - 11	12.5 on 10	36.5	15	569	2755@45		FOR
37x12.50R17/D	124R	M + S, 3PMSF	50K	RWL	35666	8.5 - 11	12.5 on 10	36.5	15	569	3525@50		
39x13.50R17/D	121R	M + S, 3PMSF	50K	RBL	52341	8.5 - 11	13.5 on 11	38.5	15	540	3195@50		
33x12.50R18/E	118S	M + S, 3PMSF	50K	RBL	27247	8.5 - 11	12.5 on 10	32.5	15	640	2910@65		
34x12.50R18/E	121R	M + S, 3PMSF	50K	RBL	36312	8.5 - 11	12.5 on 10	33.5	15	621	3195@65		
35x12.50R18/E	123R	M + S, 3PMSF	50K	RWL	13389	8.5 - 11	12.5 on 10	34.5	15	602	3415@65		
33x12.50R20/E	114S	M + S, 3PMSF	50K	RBL	04929	8.5 - 11	12.5 on 10	32.5	15	640	2600@65		
35x12.50R20/E	121R	M + S, 3PMSF	50K	RBL	23413	8.5 - 11	12.5 on 10	34.5	15	602	3195@75		
37x12.50R20/E	126R	M + S, 3PMSF	50K	RBL	18629	8.5 - 11	12.5 on 10	36.5	15	569	3750@75		
33x12.50R22/E	109R	M + S, 3PMSF	50K	RBL	62273	8.5 - 11	12.5 on 10	32.5	15	640	2270@65		
35x12.50R22/E	117R	M + S, 3PMSF	50K	RBL	67480	8.5 - 11	12.5 on 10	34.5	15	602	2835@65		
LT215/75R15/C	100/97S	M + S, 3PMSF	50K	RBL	44092	5.5 - 7	8.5 on 6	27.7	15	751	1765@50		
LT235/75R15/C	104/101S	M + S, 3PMSF	50K	RWL	63647	6 - 7	9.3 on 6.5	28.9	15	721	1985@50		
LT215/65R16/D	103/100S	M + S, 3PMSF	50K	RBL	93878	6 - 7.5	8.7 on 6.5	27	13	770	1930@65		
LT215/70R16/C	100/97R	M + S, 3PMSF	50K	RWL	56039	5.5 - 7	8.7 on 6.5	27.9	15	746	1765@50		
LT225/70R16/C	102/99R	M + S, 3PMSF	50K	RWL	94668	6 - 7	9 on 6.5	28.4	15	732	1875@50		
LT225/75R16/E	115/112S	M + S, 3PMSF	50K	RWL	37527	6 - 7	8.8 on 6	29.3	15	710	2680@80		
LT235/70R16/C	104/101S	M + S, 3PMSF	50K	RWL	33403	6 - 7.5	9.5 on 7	29	15	718	1985@50		
LT235/85R16/E	120/116S	M + S, 3PMSF	50K	RWL	75445	6 - 7.5	9.3 on 6.5	31.7	15	656	3042@80		
LT245/70R16/D	113/110S	M + S, 3PMSF	50K	RWL	28855	6.5 - 7	9.8 on 7	29.5	15	704	2535@65		
LT245/75R16/E	120/116S	M + S, 3PMSF	50K	RWL	15477	6.5 - 8	9.8 on 7	30.5	15	683	3042@80		
LT255/70R16/E	120/117S	M + S, 3PMSF	50K	RWL	65289	6.5 - 8	10.2 on 7.5	30.1	15	691	3085@80		
LT265/70R16/E	121/118S	M + S, 3PMSF	50K	RWL	62023	7 - 8.5	10.7 on 8	30.6	15	679	3195@80		
LT265/75R16/E	123/120R	M + S, 3PMSF	50K	RWL	67179	7 - 8	10.5 on 7.5	31.7	15	657	3415@80		
LT275/70R16/D	119/116S	M + S, 3PMSF	50K	RWL	97884	7 - 8.5	11 on 8	31.2	15	667	3000@65		
LT285/75R16/E	126/123R	M + S, 3PMSF	50K	RWL	05855	7.5 - 9	11.3 on 8	32.8	15	634	3750@80		
LT295/75R16/E	128/125R	M + S, 3PMSF	50K	RWL	99926	7.5 - 9.5	11.6 on 8	33.4	15	623	3970@80		
LT305/70R16/E	124/121R	M + S, 3PMSF	50K	RWL	34102	8 - 9.5	12.2 on 9	32.8	15	634	3525@65		
LT315/75R16/E	127/124R	M + S, 3PMSF	50K	RWL	50203	8 - 11	12.3 on 8.5	34.6	15	602	3860@65		
LT225/65R17/D	107/103S	M + S, 3PMSF	50K	RBL	95341	6 - 8	9 on 6.5	28.5	13	730	2150@65		
LT235/80R17/E	120/117S	M + S, 3PMSF	50K	RBL	10158	6 - 7.5	9.3 on 6.5	31.8	15	654	3085@80		
LT245/65R17/D	111/108S	M + S, 3PMSF	50K	RWL	52433	7 - 8	9.8 on 7	29.5	13	704	2405@65		

Continued ►

See Important Product Information section at the back of the book.

BFGOODRICH® ALL-TERRAIN T/A® KO2

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG	OE FITMENTS
LT245/70R17/E	119/116S	M + S, 3PMSF	50K	RWL	09666	6.5 - 8	9.8 on 7	30.6	15	681	3000@80		
LT245/75R17/E	121/118S	M + S, 3PMSF	50K	RWL	26470	6.5 - 7.5	9.8 on 7	31.5	15	660	3195@80		
LT255/65R17/D	114/110S	M + S, 3PMSF	50K	RWL	28221	7 - 9	10.2 on 7.5	30.1	15	691	2600@65		
LT255/70R17/E	121/118S	M + S, 3PMSF	50K	RBL	37495	6.5 - 8.5	10.2 on 7.5	31.1	15	669	3195@80		
LT255/75R17/C	111/108S	M + S, 3PMSF	50K	RBL	11450	6.5 - 8.5	10 on 7	32.1	15	649	2405@50		
LT265/65R17/E	120/117S	M + S, 3PMSF	50K	RWL	16681	7.5 - 9.5	10.7 on 8	30.6	15	681	3085@80		
LT265/70R17/C	112/109S	M + S, 3PMSF	50K	RWL	66255	7 - 8.5	10.7 on 8	31.7	15	657	2470@50		
LT265/70R17/C	112/109S	M + S, 3PMSF	50K	RBL	10892	7 - 8.5	10.7 on 8	31.7	15	657	2470@50		JEP, FOR
LT265/70R17/E	121/118S	M + S, 3PMSF	50K	RWL	29668	7 - 8.5	10.7 on 8	31.7	15	657	3195@80		
LT275/65R17/E	121/118S	M + S, 3PMSF	50K	RWL	42347	7.5 - 9.5	11 on 8	31.1	15	669	3195@80		
LT275/70R17/E	121/118R	M + S, 3PMSF	50K	RWL	85924	7 - 8.5	11 on 8	32.2	15	646	3195@80		
LT285/70R17/C	116/113Q	M + S, 3PMSF	50K	RBL	81501	7.5 - 9	11.5 on 8.5	32.8	15	635	2755@50		JEP
LT285/70R17/C	116/113Q	M + S, 3PMSF	50K	RWL	31812	7.5 - 9	11.5 on 8.5	32.8	15	635	2755@50		JEP
LT285/70R17/C	116/113S	M + S, 3PMSF	50K	RBL	24481	7.5 - 9	11.5 on 8.5	32.8	15	635	2755@50		FOR
LT285/70R17/E	121/118R	M + S, 3PMSF	50K	RWL	99728	7.5 - 9	11.5 on 8.5	32.8	15	635	3195@80		
LT285/75R17/E	121/118S	M + S, 3PMSF	50K	RBL	74713	7.5 - 9.5	11.3 on 8	33.9	15	614	3195@80		
LT295/70R17/E	121/118S	M + S, 3PMSF	50K	RWL	69195	7.5 - 10	11.8 on 8.5	33.3	15	624	3195@80		
LT305/65R17/E	121/118R	M + S, 3PMSF	50K	RWL	00819	8.5 - 11	12.2 on 9	32.6	15	638	3195@65		
LT315/70R17/C	113/110S	M + S, 3PMSF	50K	RBL	08884	8 - 11	12.7 on 9.5	34.4	15	604	2535@45		JEP
LT315/70R17/C	113/110T	M + S, 3PMSF	50K	RBL	07361	8 - 11	12.7 on 9.5	34.4	15	604	2535@45		FOR
LT315/70R17/E	121/118S	M + S, 3PMSF	50K	RBL	08806	8 - 11	12.7 on 9.5	34.4	15	604	3195@65		
LT255/55R18/D	109/105R	M + S, 3PMSF	50K	RBL	04785	7 - 9	10.4 on 8	29	13	717	2270@65		
LT255/70R18/D	117/114S	M + S, 3PMSF	50K	RBL	70539	6.5 - 8.5	10.2 on 7.5	32.1	15	648	2835@65		
LT265/60R18/E	119/116S	M + S, 3PMSF	50K	RBL	63681	7.5 - 9.5	10.7 on 8	30.5	15	682	3000@80		
LT265/65R18/E	122/119R	M + S, 3PMSF	50K	RWL	05260	7.5 - 9.5	10.7 on 8	31.5	15	659	3305@80		
LT265/70R18/E	124/121R	M + S, 3PMSF	50K	RWL	40855	7 - 9	10.7 on 8	32.6	15	637	3525@80		
LT275/65R18/E	123/120R	M + S, 3PMSF	50K	RWL	19463	7.5 - 9	11 on 8	32.1	15	648	3415@80		
LT275/70R18/E	125/122R	M + S, 3PMSF	50K	RWL	45062	7 - 8.5	11 on 8	33.2	15	627	3640@80		
LT285/60R18/D	118/115S	M + S, 3PMSF	50K	RWL	99506	8 - 10	11.5 on 8.5	31.5	15	661	2910@65		
LT285/65R18/E	125/122R	M + S, 3PMSF	50K	RWL	16168	8 - 10	11.5 on 8.5	32.6	15	639	3640@80		
LT305/65R18/E	124/121R	M + S, 3PMSF	50K	RBL	07337	8.5 - 11	12.2 on 9	33.6	15	619	3525@65		
LT305/70R18/E	126/123R	M + S, 3PMSF	50K	RBL	02293	8.5 - 10	12.2 on 9	34.8	15	597	3750@75		
LT325/65R18/E	127/124R	M + S, 3PMSF	50K	RWL	01547	9 - 12	13 on 9.5	34.6	15	601	3860@65		
LT265/60R20/E	121/118S	M + S, 3PMSF	50K	RBL	85528	7.5 - 9.5	10.7 on 8	32.5	15	640	3195@80		
LT275/55R20/D	115/112S	M + S, 3PMSF	50K	RBL	61764	7.5 - 9.5	11.2 on 8.5	31.9	15	652	2680@65		
LT275/60R20/D	119/116S	M + S, 3PMSF	50K	RBL	64811	7.5 - 9.5	11 on 8	33	15	630	3000@65		
LT275/65R20/E	126/123S	M + S, 3PMSF	50K	RBL	17764	7.5 - 9.5	11 on 8	34.1	15	610	3750@80		
LT285/55R20/D	117/114T	M + S, 3PMSF	50K	RBL	36614	8 - 10	11.7 on 9	32.4	15	643	2835@65		
LT285/60R20/E	125/122S	M + S, 3PMSF	50K	RBL	29598	8 - 10	11.5 on 8.5	33.5	15	622	3640@80		
LT285/65R20/E	127/124S	M + S, 3PMSF	50K	RBL	02279	8 - 10	11.5 on 8.5	34.6	15	602	3860@80		
LT295/55R20/E	123/120R	M + S, 3PMSF	50K	RBL	62900	8 - 10	12.2 on 9.5	32.8	15	635	3415@80		
LT295/60R20/E	126/123R	M + S, 3PMSF	50K	RBL	33830	8 - 10	11.8 on 8.5	33.9	15	613	3750@80		
LT295/65R20/E	129/126R	M + S, 3PMSF	50K	RBL	05511	8 - 10	11.8 on 8.5	35.1	15	592	4080@80		
LT305/55R20/E	121/118S	M + S, 3PMSF	50K	RBL	15149	8.5 - 11	12.4 on 9.5	33.2	15	626	3195@65		
LT325/60R20/E	126/123S	M + S, 3PMSF	50K	RBL	12201	9 - 12	13 on 9.5	35.4	15	588	3750@75		



BFGOODRICH® MUD-TERRAIN T/A® KM3

The BFGoodrich® Mud-Terrain T/A® KM3 tire is must-have equipment for the serious off-road enthusiast when conditions require extreme traction and toughness.



ALL-SEASON



BENEFITS OF BFGOODRICH® TIRES

MADE TO MUD: 5% better mud traction¹.

Power through mud and loose soil with our Terrain-Attack Tread Design. Its massive tread blocks are designed to deliver incredible grip from any angle of approach, and Mud-Phobic Bars release compacted mud for continued traction.

BUILT TO CLIMB: 8% better rock traction².

Take on Earth's toughest terrain with the advanced Krawl-TEK compound that enhances grip on rock and slick surfaces. Plus, a Linear Flex Zone allows the tire to flex and envelop objects in aired-down driving situations.

CREATED TO CONQUER: 27% tougher sidewalls³.

Go places others only dream of thanks to race-proven advancements. CoreGard Max Technology uses a thick sidewall shield and specialized compound to help guard against sharp objects, while Traction-Armor Sidewall Sculpture helps prevent sidewall splitting.



WEAR



EFFICIENCY



OFF-ROAD



BRAKING



COMFORT

POPULAR REPLACEMENT MARKET FITMENTS:

- Jeep Wrangler
- Ford Trucks
- RAM Trucks
- Chevrolet Trucks
- GMC Trucks
- Toyota Trucks
- Nissan Trucks

¹Based on internal mud traction testing vs. the BFGoodrich® Mud-Terrain T/A® KM2 tire in size LT265/70R17 using a 2014 Jeep® Wrangler Rubicon. Actual results may vary.

²Based on dry rock traction testing vs. the BFGoodrich® Mud-Terrain T/A® KM2 tire in size LT265/70R17 using a 2014 Jeep® Wrangler Rubicon. Actual results may vary.

³Based on internal sidewall puncture testing vs. the BFGoodrich® Mud-Terrain T/A® KM2 tire in size LT265/70R17. Actual results may vary.

Tire Size	Service Description	Other	Limited Warranty	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
30x9.50R15/C	104Q	M + S	STD	RBL	11882	6.5 - 8.5	9.5 on 7.5	29.5	18	705	1985@50	
31x10.50R15/C	109Q	M + S	STD	RBL	00893	7 - 9	10.5 on 8.5	30.5	18	682	2270@50	
32x11.50R15/C	113Q	M + S	STD	RBL	26547	8 - 10	11.5 on 9	31.5	18	659	2535@50	
33x10.50R15/C	114Q	M + S	STD	RBL	17109	7 - 9	10.5 on 8.5	32.5	18	640	2600@50	
33x12.50R15/C	108Q	M + S	STD	RBL	28830	8.5 - 11	12.5 on 10	32.5	18	640	2205@45	
35x12.50R15/C	113Q	M + S	STD	RBL	27226	8.5 - 11	12.5 on 10	34.5	18	602	2535@45	
33x12.50R17/E	120Q	M + S	STD	RBL	01898	8.5 - 11	12.5 on 10	32.5	18	640	3085@75	
35x12.50R17/E	121Q	M + S	STD	RBL	55079	8.5 - 11	12.5 on 10	34.5	18	602	3195@75	

Continued ►

BFGOODRICH® MUD-TERRAIN T/A® KM3

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
37x12.50R17/D	124Q	M + S	STD	RBL	39458	8.5 - 11	12.5 on 10	36.5	18	569	3525@50	
37x13.50R17/E	121Q	M + S	STD	RBL	79851	8.5 - 11	13.5 on 11	36.5	18	554	3195@75	
39x13.50R17/C	121Q	M + S	STD	RBL	71004	8.5 - 11	13.6 on 11	38.5	18	540	3195@45	
33x12.50R18/E	118Q	M + S	STD	RBL	32589	8.5 - 11	12.5 on 10	32.5	18	640	2910@75	
35x12.50R18/E	123Q	M + S	STD	RBL	72204	8.5 - 11	12.5 on 10	34.5	18	602	3415@75	
37x12.50R18/E	128Q	M + S	STD	RBL	00958	8.5 - 11	12.5 on 10	36.5	18	569	3970@75	
37x13.50R18/E	128Q	M + S	STD	RBL	75495	8.5 - 11	13.5 on 11	36.5	18	569	3970@75	
33x12.50R20/E	114Q	M + S	STD	RBL	38937	8.5 - 11	12.5 on 10	32.5	18	640	2600@75	
35x12.50R20/E	121Q	M + S	STD	RBL	08843	8.5 - 11	12.5 on 10	34.5	18	602	3195@75	
37x12.50R20/E	126Q	M + S	STD	RBL	37549	8.5 - 11	12.5 on 10	36.5	18	569	3750@75	
37x13.50R20/E	127Q	M + S	STD	RBL	01047	8.5 - 11	13.5 on 11	36.5	18	569	3860@75	
37x13.50R22/E	123Q	M + S	STD	RBL	51646	8.5 - 11	13.5 on 11	36.5	18	569	3415@75	
LT215/75R15/C	100/97Q	M + S	STD	RBL	92296	5.5 - 7	8.5 on 6	27.7	18	751	1765@50	
LT235/75R15/D	110/107Q	M + S	STD	RBL	09453	6 - 7	9.3 on 6.5	28.9	18	721	2335@65	
LT235/70R16/D	110/107Q	M + S	STD	RBL	23390	6 - 7.5	9.5 on 7	29	18	718	2335@65	
LT245/75R16/E	120/116Q	M + S	STD	RBL	11954	6.5 - 8	9.8 on 7	30.5	18	683	3042@80	
LT255/70R16/E	120/117Q	M + S	STD	RBL	64691	6.5 - 8	10.2 on 7.5	30.1	18	691	3085@80	
LT255/85R16/E	123/120Q	M + S	STD	RBL	85538	6.5 - 8	10 on 7	33.1	18	629	3415@80	
LT265/70R16/E	121/118Q	M + S	STD	RBL	12657	7 - 8.5	10.7 on 8	30.6	18	679	3195@80	
LT265/75R16/E	123/120Q	M + S	STD	RBL	79327	7 - 8	10.5 on 7.5	31.7	18	657	3415@80	
LT285/75R16/E	126/123Q	M + S	STD	RBL	85586	7.5 - 9	11.3 on 8	32.8	18	634	3750@80	
LT305/70R16/E	124/121Q	M + S	STD	RBL	84454	8 - 9.5	12.2 on 9	32.8	18	634	3525@75	
LT315/75R16/E	127/124Q	M + S	STD	RBL	08056	8 - 11	12.3 on 8.5	34.6	18	602	3860@75	
LT245/70R17/E	119/116Q	M + S	STD	RBL	63794	6.5 - 8	9.8 on 7	30.6	18	681	3000@80	
LT255/65R17/D	114/110Q	M + S	STD	RBL	09656	7 - 9	10.2 on 7.5	30.1	18	691	2600@65	
LT255/75R17/C	111/108Q	M + S	STD	RBL	43996	6.5 - 8.5	10 on 7	32.1	18	649	2405@50	
LT265/65R17/E	120/117Q	M + S	STD	RBL	50779	7.5 - 9.5	10.7 on 8	30.6	18	681	3085@80	
LT265/70R17/E	121/118Q	M + S	STD	RBL	32095	7 - 8.5	10.7 on 8	31.7	18	657	3195@80	
LT285/70R17/E	121/118Q	M + S	STD	RBL	53313	7.5 - 9	11.5 on 8.5	32.8	18	635	3195@80	
LT285/75R17/E	121/118Q	M + S	STD	RBL	08858	7.5 - 9.5	11.3 on 8	33.9	18	614	3195@80	
LT295/70R17/E	121/118Q	M + S	STD	RBL	15052	7.5 - 10	11.8 on 8.5	33.3	18	624	3195@80	
LT315/70R17/E	121Q	M + S	STD	RBL	69713	8 - 11	12.7 on 9.5	34.4	18	604	3195@75	
LT265/60R18/E	119/116Q	M + S	STD	RBL	81901	7.5 - 9.5	10.7 on 8	30.5	18	682	3000@80	
LT275/65R18/E	123/120Q	M + S	STD	RBL	07111	7.5 - 9	11 on 8	32.1	18	648	3415@80	
LT275/70R18/E	125/122Q	M + S	STD	RBL	10199	7 - 8.5	11 on 8	33.2	18	627	3640@80	
LT285/65R18/E	125/122Q	M + S	STD	RBL	91897	8 - 10	11.5 on 8.5	32.6	18	639	3640@80	
LT285/70R18/E	127/124Q	M + S	STD	RBL	42869	7.5 - 9.5	11.5 on 8.5	33.7	18	616	3860@80	
LT295/70R18/E	129/126Q	M + S	STD	RBL	61501	7.5 - 10	11.8 on 8.5	34.3	18	607	4080@80	
LT305/60R18/E	121/118Q	M + S	STD	RBL	87490	8.5 - 11	12.2 on 9	32.4	18	642	3195@75	
LT325/65R18/E	127Q	M + S	STD	RBL	57267	9 - 12	13 on 9.5	34.6	18	601	3860@75	
LT275/65R20/E	126/123Q	M + S	STD	RBL	15830	7.5 - 9.5	11 on 8	34.1	18	610	3750@80	
LT285/55R20/E	122/119Q	M + S	STD	RBL	63019	8 - 10	11.7 on 9	32.4	18	643	3305@80	
LT295/55R20/E	123/120Q	M + S	STD	RBL	17526	8 - 10	12.2 on 9.5	32.8	18	635	3415@80	
LT295/60R20/E	126/123Q	M + S	STD	RBL	82008	8 - 10	11.8 on 8.5	33.9	18	613	3750@80	
LT295/65R20/E	129/126Q	M + S	STD	RBL	01390	8 - 10	11.8 on 8.5	35.1	18	592	4080@80	
LT305/55R20/E	121/118Q	M + S	STD	RBL	91993	8.5 - 11	12.4 on 9.5	33.2	18	626	3195@75	
LT325/60R20/E	126/123Q	M + S	STD	RBL	51810	9 - 12	13 on 9.5	35.4	18	588	3750@75	

Light Truck/SUV

BFGOODRICH® MUD-TERRAIN T/A® KM2

The no-limits tire for serious off-road enthusiasts.



ALL-SEASON



BENEFITS OF BFGOODRICH® TIRES

When roadside assistance is not an option.

Super-tough sidewall compound and three-ply construction resist cuts and bruises to take the edge off rocks and other off-road hazards.

Overcome nearly any obstacle.

Linear Flex Zones allow the tire to conform and grab obstacles in aired-down driving.

Leave the tow rig at home.

Drive to the trails with better road manners and less noise than you'd expect in an unstoppable off-road tire.



ORIGINAL EQUIPMENT FITMENTS:

Jeep Wrangler JL

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG	OE FITMENTS
LT255/75R17/C	111/108Q		STD	BSW	15496	6.5 - 8.5	10.04 on 7	32	17	649	2405@50		JEP



Light Truck/SUV

Experienced driver depicted.

BFGOODRICH® KRAWLER™ T/A® KX

Winner: Ultra4 King of Hammers Everyman Challenge 2016, 2017 and 2020.



ALL-SEASON



BENEFITS OF BFGOODRICH® TIRES

Unprecedented grip on rocks, mud and dirt.

Super-tough carcass with a deep-lug tread pattern and soft, grippy compound that grab onto uneven surfaces for better traction.

World's best rock-crawling tire.

Tread pattern can be carved to better suit your individual off-road requirements.

Extreme puncture resistance.

Blue Label DOT highway legal tire in 37" only. Red Label non-DOT for off-road recreation and competition use in 37", 39" and 42" diameters.



WEAR



EFFICIENCY



OFF-ROAD



BRAKING



COMFORT

POPULAR REPLACEMENT MARKET FITMENTS:

Non-DOT Red Label Krawler™ for off-highway use is available exclusively at 1-800-RACE-BFG. Additional information is available at BFGoodrichRacing.com.

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
37x12.50R17/C	116L		STD	RBL	51716	8.5 - 11	12.9 on 10	37	22	562	2755@35	



BFGOODRICH®
TRAIL-TERRAIN T/A®

Adventure-ready when you need it.



BENEFITS OF BFGOODRICH® TIRES

BUILT TO LAST: The BFGoodrich® Trail-Terrain T/A® tire outlasts the Cooper® Discoverer® AT3 4S™ tire by more than 4,500 miles¹.

The all-new BFGoodrich® Trail-Terrain T/A® tire is backed by a 60,000-Mile Warranty² and a 60-Day Satisfaction Guarantee³. An optimized footprint design featuring Full-Depth 3-D Locking Sipes provides excellent tread block stability for even wear, which results in longer treadlife and a quiet, comfortable ride.

EQUIPPED FOR EVERY SEASON: The BFGoodrich® Trail-Terrain T/A® tire offers 11% better snow traction than the Cooper® Discoverer® AT3 4S™ tire⁴.

Don't let adverse weather stand in your way. The BFGoodrich® Trail-Terrain T/A® tire is severe snow rated with a three-peak mountain snowflake symbol. It continues to provide traction long after the mercury drops. The Full-Depth 3-D Sipes are engineered to create plenty of power and grip over the full life of the tire.

ENGINEERED TO EXPLORE: The good road in isn't always the good road out.

It's not your average daily driver. The BFGoodrich® Trail-Terrain T/A® tire is designed to resist chipping and tearing in occasional gravel road usage. The serrated shoulder design is optimized for soft-soil traction in light off-pavement situations without compromising road noise.

60-DAY SATISFACTION GUARANTEE

60-DAY SATISFACTION GUARANTEE³.

We're confident you'll love your new BFGoodrich® Trail-Terrain T/A® replacement tires. So confident, in fact, that we back your purchase with a 60-Day Satisfaction Guarantee. If you're not 100% satisfied with your new tires, just bring the tires and original sales receipt back to the place where you bought the tires within 60 days of your purchase and we will gladly exchange them for a new set of tires of equal or lesser value.

¹Based on a treadwear test using tires in size 265/70R17 115T on a 2020 Ford® F-150® 4x4. Actual on-road results may vary.

²Excludes Original Equipment tires.

³Guarantee applies to up to six (6) tires per customer. Guarantee applies only to tires that were purchased and mounted and does not apply to exchanged tires that were provided under this guarantee. The guarantee does not include the cost of valve stems. Tires that are damaged due to misuse or misapplication, road hazards, mechanical problems related to the vehicle, use in any racing-related activities or competitive events, or tires that are removed from the original vehicle on which they were installed are excluded from guarantee.

⁴Based on third-party snow traction tests using ASTM Test Method F1805-12 using tires in size 265/70R17 115T. Actual on-road results may vary.



POPULAR REPLACEMENT MARKET FITMENTS:

- Chevrolet Silverado 1500
- Ford Bronco Sport
- Ford Ranger
- Jeep Renegade & Cherokee
- Subaru Outback
- Toyota RAV4
- Toyota Tacoma



Experienced driver depicted.

BFGOODRICH® TRAIL-TERRAIN T/A*

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG	OE FITMENTS
235/75R15/XL	109T	M + S, 3PMSF	60K	ORWL	12184	6 - 8	9.2 on 6.5	28.9	12.5	721	2271@50	660/A/A	
215/65R16	98T	M + S, 3PMSF	60K	ORWL	47940	6 - 7.5	8.7 on 6.5	27	12.5	770	1653@44	660/A/A	
225/75R16/XL	108T	M + S, 3PMSF	60K	ORWL	06260	6 - 7.5	8.9 on 6	29.3	12.5	710	2205@50	660/A/A	
235/70R16	106T	M + S, 3PMSF	60K	ORWL	08179	6 - 8	9.4 on 7	29	12.5	718	2094@44	660/A/A	
245/70R16/XL	111T	M + S, 3PMSF	60K	ORWL	20333	6.5 - 8	9.8 on 7	29.5	12.5	704	2403@50	660/A/A	
245/75R16	111T	M + S, 3PMSF	60K	ORWL	65907	6.5 - 8	9.8 on 7	30.5	12.5	683	2403@44	660/A/A	
255/70R16/XL	115T	M + S, 3PMSF	60K	ORWL	94228	6.5 - 8.5	10.2 on 7.5	30.1	12.5	691	2679@50	660/A/A	
265/70R16	112T	M + S, 3PMSF	60K	ORWL	10385	7 - 9	10.7 on 8	30.6	12.5	679	2469@44	660/A/A	
265/75R16	116T	M + S, 3PMSF	60K	ORWL	42263	7 - 9	10.5 on 7.5	31.6	12.5	657	2756@44	660/A/A	
215/60R17	96H	M + S, 3PMSF	60K	BSW	63392	6 - 7.5	8.7 on 6.5	27.2	12.5	766	1565@51	660/A/A	
215/65R17	99T	M + S, 3PMSF	60K	ORWL	01727	6 - 7.5	8.7 on 6.5	28	12.5	742	1709@44	660/A/A	
225/60R17	99H	M + S, 3PMSF	60K	BSW	58571	6 - 8	9 on 6.5	27.6	12.5	753	1709@51	660/A/A	
225/65R17	102T	M + S, 3PMSF	60K	ORWL	92893	6 - 8	9 on 6.5	28.5	12.5	730	1874@44	660/A/A	
235/65R17	104H	M + S	60K	BSW	68530	6.5 - 8.5	9.4 on 7	29.1	11	716	1984@51	660/A/A	KIA
235/65R17/XL	108T	M + S, 3PMSF	60K	ORWL	56199	6.5 - 8.5	9.4 on 7	29.1	12.5	716	2205@50	660/A/A	
245/65R17/XL	111T	M + S, 3PMSF	60K	ORWL	01614	7 - 8.5	9.8 on 7	29.5	12.5	704	2403@50	660/A/A	
245/70R17/XL	114T	M + S, 3PMSF	60K	ORWL	67462	6.5 - 8	9.8 on 7	30.5	12.5	681	2601@50	660/A/A	
245/75R17	112T	M + S, 3PMSF	60K	ORWL	06073	6.5 - 8	9.8 on 7	31.5	12.5	660	2469@44	660/A/A	
255/65R17	110T	M + S, 3PMSF	60K	ORWL	78163	7 - 9	10.2 on 7.5	30.1	12.5	691	2337@44	660/A/A	
255/70R17	112T	M + S, 3PMSF	60K	ORWL	01313	6.5 - 8.5	10.2 on 7.5	31.1	12.5	669	2469@44	660/A/A	
255/75R17	115T	M + S, 3PMSF	60K	ORWL	09544	6.5 - 8.5	10 on 7	32	12.5	649	2679@44	660/A/B	
265/65R17	112T	M + S, 3PMSF	60K	ORWL	01542	7.5 - 9.5	10.7 on 8	30.5	12.5	681	2469@44	660/A/A	
265/70R17	115T	M + S, 3PMSF	60K	ORWL	71447	7 - 9	10.7 on 8	31.6	12.5	657	2679@44	660/A/A	
P285/70R17	117T	M + S, 3PMSF	60K	ORWL	08164	7.5 - 9.5	11.5 on 8.5	32.8	12.5	635	2833@44	660/A/B	
225/55R18/XL	102H	M + S, 3PMSF	60K	BSW	20173	6 - 8	9.2 on 7	27.8	12.5	749	1874@50	660/A/A	
225/60R18	100H	M + S, 3PMSF	60K	BSW	70164	6 - 8	9 on 6.5	28.6	12.5	727	1764@51	660/A/A	
235/55R18/XL	104H	M + S, 3PMSF	60K	BSW	07789	6.5 - 8.5	9.6 on 7.5	28.1	12.5	739	1984@50	660/A/A	
235/60R18/XL	107H	M + S, 3PMSF	60K	BSW	17722	6.5 - 8.5	9.4 on 7	29.1	12.5	715	2150@50	660/A/A	
245/60R18	105H	M + S, 3PMSF	60K	BSW	89637	7 - 8.5	9.8 on 7	29.6	12.5	703	2039@51	660/A/A	
255/55R18/XL	109H	M + S, 3PMSF	60K	BSW	39545	7 - 9	10.4 on 8	29	12.5	717	2271@50	660/A/A	
255/65R18	111T	M + S, 3PMSF	60K	ORWL	78303	7 - 9	10.2 on 7.5	31.1	12.5	670	2403@44	660/A/A	
255/70R18/XL	116H	M + S, 3PMSF	60K	BSW	68498	6.5 - 8.5	10.2 on 7.5	32.1	12.5	648	2756@50	660/A/A	
265/60R18	110T	M + S, 3PMSF	60K	ORWL	92079	7.5 - 9.5	10.7 on 8	30.5	12.5	682	2337@44	660/A/A	
265/65R18	114T	M + S, 3PMSF	60K	ORWL	57310	7.5 - 9.5	10.7 on 8	31.5	12.5	659	2601@44	660/A/A	
265/70R18	116T	M + S, 3PMSF	60K	ORWL	75198	7 - 9	10.7 on 8	32.6	12.5	637	2756@44	660/A/A	
275/65R18	116T	M + S, 3PMSF	60K	ORWL	95912	7.5 - 9.5	11 on 8	32.1	12.5	648	2756@44	660/A/A	
285/60R18	116H	M + S, 3PMSF	60K	BSW	50153	8 - 10	11.5 on 8.5	31.5	12.5	661	2756@51	660/A/A	
235/55R19/XL	105H	M + S, 3PMSF	60K	BSW	30588	6.5 - 8.5	9.6 on 7.5	29.2	12.5	713	2039@50	660/A/A	
255/55R19/XL	111H	M + S, 3PMSF	60K	BSW	17963	7 - 9	10.4 on 8	30	12.5	692	2403@50	660/A/A	
245/50R20	102H	M + S, 3PMSF	60K	BSW	34161	7 - 8.5	10 on 7.5	29.7	12.5	701	1874@51	660/A/A	
245/60R20	107H	M + S, 3PMSF	60K	BSW	30234	7 - 8.5	9.8 on 7	31.6	12.5	659	2150@51	660/A/A	
255/55R20/XL	110H	M + S, 3PMSF	60K	BSW	59755	7 - 9	10.4 on 8	31	12.5	671	2337@50	660/A/A	
265/50R20	107H	M + S, 3PMSF	60K	BSW	04147	7.5 - 9.5	10.9 on 8.5	30.5	12.5	683	2150@51	660/A/A	
275/55R20	113T	M + S, 3PMSF	60K	ORWL	09185	7.5 - 9.5	11.2 on 8.5	31.9	12.5	652	2535@44	660/A/A	
275/60R20	115T	M + S, 3PMSF	60K	ORWL	40750	7.5 - 9.5	11 on 8	33	12.5	630	2679@44	660/A/A	
275/45R22/XL	112H	M + S, 3PMSF	60K	BSW	34341	8.5 - 10.5	10.7 on 9	31.8	12.5	655	2469@50	660/A/A	
285/45R22/XL	114H	M + S, 3PMSF	60K	BSW	56955	9 - 10.5	11.2 on 9.5	32.1	12.5	648	2601@50	660/A/A	

BFGOODRICH®

ADVANTAGE T/A® SPORT LT

Defy the weather, control the curves, and enjoy the drive for miles and miles.



BENEFITS OF BFGOODRICH® TIRES

ALL-WEATHER, ALL-PURPOSE: Up to 30% better snow traction than leading competitors, exceeding U.S. Tire Manufacturers Association (USTMA) Severe Snow Traction performance requirements¹. 9% better hydroplaning performance².

3-D SipeLock™ Technology provides more Biting Edges for significantly increased wet and light snow traction. Advanced All-Season Tread Compounds are silica-infused to deliver outstanding grip year-round. Aqua-Flume™ Technology is a curvilinear groove network designed to disperse water from under the contact patch.

ADVANCED MILEAGE: Up to 20,000 more miles with the BFGoodrich® Advantage T/A® Sport LT tire³.

Optimized footprint manages treadwear evolution for longer life and a quiet ride. 3-D SipeLock™ Technology is designed to lock together under the tire's footprint, providing stability for longer wear. Full-depth tread features maintain a consistent performance and look throughout the life of the tire.

AGILE HANDLING: 10% better handling⁴.

Next-generation ETEC System™ (Equal TEnsion Containment System™) maintains optimal footprint shape during cornering and high-speed situations⁵. Next-generation g-Wedge™ Sidewall Stabilizer firms sidewall for crisp handling and a comfortable ride. Continuous Center Rib provides a consistent steering response and road feel.

¹Based on third-party snow traction tests using ASTM Test Method F1805 in size 245/65R17 107T vs. the Cooper® Discoverer® SRX™ and Goodyear® Assurance® CS Fuel Max™ tires in size 245/65R17 107T and the Firestone® Destination™ LE2 and YOKOHAMA® Geolandar® H/T G056™ tires in size P245/65R17 105T. Actual on-road results may vary.

²Based on internal hydroplaning results versus the previous generation BFGoodrich® Long Trail T/A® Tour tire in sizes P245/65R17 105T and 245/65R17 107T. Actual on-road results may vary.

³60,000-mile limited treadlife warranty for V-rated vs. 40,000-mile limited treadlife warranty for the V-rated BFGoodrich® Long Trail T/A® Tour tire.

⁴Based on internal handling results vs. the previous-generation BFGoodrich® Long Trail T/A® Tour tire in sizes P245/65R17 105T and 245/65R17 107T. Actual on-road results may vary.

⁵Exceeding the safe, legal speed limit is neither recommended nor endorsed.



POPULAR REPLACEMENT MARKET FITMENTS:

- Mazda CX5
- Toyota RAV4
- Honda CR-V
- Honda Pilot
- Nissan Pathfinder
- GMC Acadia
- Chevrolet Tahoe



BFGOODRICH® ADVANTAGE T/A® SPORT LT

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
235/75R15/XL	109T	M + S, 3PMSF	65K	BSW	84087	6 - 8	9.3 on 6.5	28.9	11.5	721	2271@50	740/B/A
215/70R16	100H	M + S, 3PMSF	65K	BSW	29291	5.5 - 7	8.7 on 6.5	27.8	11	746	1764@44	700/B/A
215/70R16	100T	M + S, 3PMSF	65K	BSW	36049	5.5 - 7	8.7 on 6.5	27.8	11.5	746	1764@44	740/B/A
225/70R16	103T	M + S, 3PMSF	65K	BSW	52083	6 - 7.5	9 on 6.5	28.4	11.5	732	1929@44	740/B/A
225/75R16	104T	M + S, 3PMSF	65K	BSW	02357	6 - 7.5	8.9 on 6	29.3	11.5	710	1984@44	740/B/A
235/70R16	106T	M + S, 3PMSF	65K	BSW	16503	6 - 8	9.5 on 7	29	11.5	718	2094@44	740/B/A
245/70R16	107T	M + S, 3PMSF	65K	BSW	07998	6.5 - 8	9.8 on 7	29.5	11.5	704	2149@44	740/B/A
245/75R16	111T	M + S, 3PMSF	65K	BSW	53324	6.5 - 8	9.8 on 7	30.5	11.5	683	2403@44	740/B/A
255/70R16	111T	M + S, 3PMSF	65K	BSW	83857	6.5 - 8.5	10.2 on 7.5	30.1	11.5	691	2403@44	740/B/A
265/75R16	116T	M + S, 3PMSF	65K	BSW	29618	7 - 9	10.5 on 7.5	31.7	11.5	657	2756@44	740/B/A
225/65R17	102H	M + S, 3PMSF	65K	BSW	21562	6 - 8	6 on 6.5	28.5	11	730	1874@44	700/B/A
225/65R17	102T	M + S, 3PMSF	65K	BSW	37254	6 - 8	9 on 6.5	28.5	11.5	730	1874@44	740/B/A
235/65R17	104T	M + S, 3PMSF	65K	BSW	22172	6.5 - 8.5	9.5 on 7	29.1	11.5	716	1984@44	740/B/A
245/70R17	110T	M + S, 3PMSF	65K	BSW	34695	6.5 - 8	9.8 on 7	30.6	11.5	681	2337@44	740/B/A
255/65R17	110T	M + S, 3PMSF	65K	BSW	91094	7 - 9	10.2 on 7.5	30.1	11.5	691	2337@44	740/B/A
265/65R17	112T	M + S, 3PMSF	65K	BSW	41437	7.5 - 9.5	10.7 on 8	30.6	11.5	681	2469@44	740/B/A
265/70R17	115T	M + S, 3PMSF	65K	BSW	37585	7 - 9	10.7 on 8	31.7	11.5	657	2679@44	740/B/A
235/55R18	100V	M + S, 3PMSF	60K	BSW	40907	6.5 - 8.5	9.7 on 7.5	28.2	10.5	739	1764@44	660/B/A
235/60R18	103V	M + S, 3PMSF	60K	BSW	42377	6.5 - 8.5	9.5 on 7	29.1	10.5	715	1929@44	660/B/A
235/65R18	106H	M + S, 3PMSF	65K	BSW	50157	6.5 - 8.5	9.5 on 7	30	11	692	2094@44	700/B/A
235/65R18	106T	M + S, 3PMSF	65K	BSW	15340	6.5 - 8.5	9.5 on 7	30	11.5	692	2094@44	740/B/A
245/60R18	105H	M + S, 3PMSF	65K	BSW	26744	7 - 8.5	9.8 on 7	29.6	11	703	2039@44	700/B/A
255/55R18/XL	109V	M + S, 3PMSF	60K	BSW	37625	7 - 9	10.4 on 8	29	10.5	717	2271@50	660/B/A
255/65R18	111T	M + S, 3PMSF	65K	BSW	10522	7 - 9	10.2 on 7.5	31.1	11.5	670	2403@44	740/B/A
265/60R18	110T	M + S, 3PMSF	65K	BSW	80179	7.5 - 9.5	10.7 on 8	30.5	11.5	682	2337@44	740/B/A
265/65R18	114T	M + S, 3PMSF	65K	BSW	49388	7.5 - 9.5	10.7 on 8	31.5	11.5	659	2601@44	740/B/A
265/70R18	116T	M + S, 3PMSF	65K	BSW	06367	7 - 9	10.7 on 8	32.6	11.5	637	2756@44	740/B/A
275/65R18	116T	M + S, 3PMSF	65K	BSW	36339	7.5 - 9.5	11 on 8	32.1	11.5	648	2756@44	740/B/A
225/55R19	99H	M + S, 3PMSF	65K	BSW	50124	6 - 8	9.2 on 7	28.8	11	723	1709@44	700/B/A
235/55R19	101H	M + S, 3PMSF	65K	BSW	08047	6.5 - 8.5	9.7 on 7.5	29.2	11	713	1819@44	700/B/A
245/55R19	103T	M + S, 3PMSF	65K	BSW	77474	7 - 8.5	10 on 7.5	29.7	11.5	702	1929@44	740/B/A
255/60R19	109H	M + S, 3PMSF	65K	BSW	10460	7 - 9	10.2 on 7.5	31.1	11	670	2271@44	700/B/A
235/55R20	102H	M + S, 3PMSF	65K	BSW	18183	6.5 - 8.5	9.7 on 7.5	30.2	11	690	1874@44	700/B/A
245/50R20	102H	M + S, 3PMSF	65K	BSW	16105	7 - 8.5	10 on 7.5	29.7	11	701	1874@44	700/B/A
255/50R20/XL	109H	M + S, 3PMSF	65K	BSW	84194	7 - 9	10.4 on 8	30.1	11	691	2271@50	700/B/A
255/55R20/XL	110H	M + S, 3PMSF	65K	BSW	18821	7 - 9	10.4 on 8	31	11	671	2337@50	700/B/A
265/50R20/XL	111T	M + S, 3PMSF	65K	BSW	61990	7.5 - 9.5	10.9 on 8.5	30.5	11.5	683	2403@50	740/B/A
275/55R20	113T	M + S, 3PMSF	65K	BSW	10867	7.5 - 9.5	11.2 on 8.5	31.9	11.5	652	2535@44	740/B/A
275/60R20	115T	M + S, 3PMSF	65K	BSW	49661	7.5 - 9.5	11 on 8	33	11.5	630	2679@44	740/B/A
285/45R22/XL	114H	M + S, 3PMSF	65K	BSW	90855	9 - 10.5	11.2 on 9.5	32.1	11	648	2601@50	700/B/A

BFGOODRICH®

COMMERCIAL T/A® ALL-SEASON 2

The reinforced all-season truck tire designed to meet your business needs.



ALL-SEASON

**BENEFITS OF BFGOODRICH® TIRES****Help your fleet budget go further.**

An optimized footprint better distributes stress to increase treadlife and lower operating costs.

Commercial-grade toughness that's built for the long haul.

Improved durability vs. the BFGoodrich® Commercial T/A® All-Season tire. CoolWedge™ shoulder insert enhances cooling and prolongs tire life.

**WEAR****EFFICIENCY****OFF-ROAD****BRAKING****COMFORT****POPULAR REPLACEMENT MARKET FITMENTS:**

Ford E-Series 150/250/350

Ford F-Series 150/250/350

Chevrolet Silverado

Dodge Ram 2500/3500

Dodge 2500/3500

Tire Size	Service Description	Other	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
LT215/85R16/E	115/112R	M + S	STD	BSW	19836	5.5 - 7	8.5 on 6	30.3	13	684	2680@80	
LT225/75R16/E	115/112R	M + S	STD	BSW	93775	6 - 7	8.78 on 6	29.2	13	710	2680@80	
LT235/85R16/E	120/116R	M + S	STD	BSW	34213	6 - 7.5	9.25 on 6.5	31.7	13	656	3042@80	
LT245/75R16/E	120/116R	M + S	STD	BSW	05485	6.5 - 8	9.76 on 7	30.4	13	683	3042@80	
LT265/75R16/E	123/120R	M + S	STD	BSW	01665	7 - 8	10.51 on 7.5	31.6	13	657	3415@80	
LT235/80R17/E	120/117R	M + S	STD	BSW	11616	6 - 7.5	9.25 on 6.5	31.8	15	654	3085@80	
LT245/70R17/E	119/116R	M + S	STD	BSW	30539	6.5 - 8	9.76 on 7	30.5	14	681	3000@80	
LT245/75R17/E	121/118R	M + S	STD	BSW	39532	6.5 - 7.5	9.76 on 7	31.5	15	660	3195@80	
LT265/70R17/E	121/118R	M + S	STD	BSW	17795	7 - 8.5	10.71 on 8	31.6	14	657	3195@80	





UTV

Experienced driver depicted.



UTV

UTVs are built for fun and adventure. Whether your journey takes you through mud, rocky climbs or forest trails, BFGoodrich® tires are must-have equipment.



BFGOODRICH®

MUD-TERRAIN T/A® KM3 UTV

The BFGoodrich® Mud-Terrain T/A® KM3 UTV tire is must-have equipment for the serious off-road enthusiast when conditions require extreme traction and toughness.



ALL-SEASON

**BENEFITS OF BFGOODRICH® TIRES****MADE TO MUD**

Power through mud and loose soil with our Terrain-Attack Tread Design. Its massive tread blocks are designed to deliver incredible grip from any angle of approach, and Mud-Phobic Bars help release compacted mud for continued traction.

BUILT TO CLIMB

Take on Earth's toughest terrain with advanced UTV-specific tread compounds that help enhance grip on rock and slick surfaces. Stable tread blocks are designed to provide foundation in rocky conditions for comfortable trail navigation. Plus, a Linear Flex Zone allows the tire to flex and envelop objects in aired-down driving situations.

CREATED TO CONQUER

Go places others only dream of thanks to race-proven advancements. Tough sidewall rubber helps resist splitting and bruising, and its Advanced Deflection Design is built to prevent hazards from snagging and splitting the sidewall.

POPULAR REPLACEMENT MARKET FITMENTS:

Polaris RZR
Can-Am Maverick
Yamaha YXZ

Tire Size	Service Description	Other	Limited Warranty	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG
27x11.00R14NHS/8PR	Q		STD	RBL	33323	6.5 - 9.5	11 on 9	27	18	770	1650@46	
27x9.00R14NHS/8PR	Q		STD	RBL	29715	5 - 7.5	9 on 7	27	18	770	1287@42	
28x10.00R14NHS/8PR	Q		STD	RBL	33172	6 - 8.5	10 on 8	28	18	743	1557@44	
28x11.00R14NHS/8PR	Q		STD	RBL	13041	6.5 - 9.5	11 on 9	28	18	743	1694@46	
28x9.00R14NHS/8PR	Q		STD	RBL	93452	5 - 7.5	9 on 7	28	18	743	1359@42	
29x11.00R14NHS/8PR	Q		STD	RBL	36326	6.5 - 9.5	11 on 9	29	18	717	1815@46	
29x9.00R14NHS/8PR	Q		STD	RBL	08522	5 - 7.5	9 on 7	29	18	717	1474@42	
30x10.00R14NHS/8PR	Q		STD	RBL	76357	6 - 8.5	10 on 8	30	18	693	1760@44	
32x10.00R14NHS/8PR	Q		STD	RBL	29937	6 - 8.5	10 on 8	32	18	650	2002@44	
30x10.00R15NHS/8PR	Q		STD	RBL	50627	6 - 8.5	10 on 8	30	18	693	1694@44	
32x10.00R15NHS/8PR	Q		STD	RBL	40964	6 - 8.5	10 on 8	32	18	650	1936@44	
35x11.00R15NHS/8PR	Q		STD	RBL	01201	6.5 - 9.5	11 on 9	35	18	594	1966@46	



Experienced drivers depicted.

TIRE TIPS

- Regularly rotating your vehicle's tires helps extend the life of the tires and saves time and money in the long run.
- Inflate tires according to the vehicle manufacturer's recommendations.
- The penny trick: To check if the tire tread is worn out, place a penny into the shallowest tread groove with the top of Lincoln's head down. If the top of his head remains visible, then the tire should be replaced.
- Inflation pressure in a tire goes up (in warm weather) or down (in cold weather) 1 to 2 pounds for every 10 degrees of temperature change.
- Overloading the vehicle and tire builds up excessive heat in the tire and could result in failure.
- Visually inspect the tires to make sure there are no nails or other embedded objects that could poke a hole in the tires and cause an air leak.
- Proper alignment helps ensure that the vehicle handles correctly and helps increase the life and performance of the tires.
- For best all-around performance, the same type of tire should be used on all four wheel positions.
- Inflation information can be found in the vehicle owner's manual, on the door jamb placard, inside the fuel hatch or on the glove compartment door.
- Remember to check inflation pressure on the spare tire.
- When replacing speed-rated tires, you must use replacement tires with ratings equal to or greater than those of the Original Equipment tires if the speed capability is to be maintained. The handling of a performance vehicle may be different when the replacement tires are not the same speed rating.





SPEED RATINGS

Speed Rating	Miles/Hour	Speed Rating	Miles/Hour
N	87	U	124
P	93	H	130
Q	99	V	149
R	106	Z	150+
S	112	W	168
T	118	(Y)	186
ZR*	*For tires having a maximum speed capability above 149 MPH, a "ZR" may appear in the tire size designation. For tires having a maximum speed capability above 186 MPH, a "ZR" must appear in the tire size designation. Consult the tire manufacturer for the tire's maximum speed capability when there is no Service Description or when the Service Description is stated in parentheses.		

Exceeding the safe, legal speed limit is neither recommended nor endorsed.

IMPORTANT PRODUCT INFORMATION

Original Equipment Key for Size Charts: FOR = Ford, JEP = Jeep, TOY = Toyota, GM = General Motors

Government UTQG Ratings do not apply to Light Truck tires that are LT-metric or flotation size.



These products meet the U.S. Tire Manufacturers Association (USTMA) Severe Snow Traction performance requirements.

The sizes shown are average design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/-3% of the section height (affecting overall diameter) and +/-4% of the section width.

Section width varies approximately 0.2" (5mm) for every 0.5" (12.7mm) change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to the vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate tires beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for recommendations.

DANGER: Never mount a 15" diameter tire on a 15.5" rim.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the Original Equipment tire, you must clearly communicate to them that the handling of the vehicle may be different and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle.

Exceeding the safe, legal speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure – and possibly reduced tire loading and/or upsizing – is required. In the absence of specific recommendations by the vehicle manufacturer, use the guidelines on the following page, which are based on those in the European Tyre and Rim Technical Organisation Standards Manual.

**FOR SPEEDS ABOVE 100 MPH (160 KM/H),
LOAD AND INFLATION MUST BE ADJUSTED ACCORDING TO THE TABLE BELOW.**

H-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0
Load Capacity (% of max)	100	100	100	100	100	100

Q-Speed-Rated Sizes:

Maximum Speed (mph)	100
Inflation Increase (psi)	0.0
Load Capacity (% of max)	100

R-Speed-Rated Sizes:

Maximum Speed (mph)	100	106
Inflation Increase (psi)	0.0	1.0
Load Capacity (% of max)	100	100

S-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112
Inflation Increase (psi)	0.0	1.0	2.0
Load Capacity (% of max)	100	100	100

T-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112	118
Inflation Increase (psi)	0.0	1.0	2.0	3.0
Load Capacity (% of max)	100	100	100	100

V-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0	5.0	5.0	5.0
Load Capacity (% of max)	100	100	100	100	100	100	97	94	91

W-Speed-Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85

Y-Speed-Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	0.0	0.0	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	100	100	100	95	90	85



[BFGoodrichTires.com](https://www.BFGoodrichTires.com) #BuiltOnBFG



Copyright © 2022 MNA, Inc. All rights reserved. BDL20715 REV0922