



FALKEN
TIRES

2025

CAR & LIGHT TRUCK

FALKEN TIRES

As Falken celebrates 40 years of motorsports, we reminisce about the progress we've made, and look forward to the opportunities ahead.

Four decades of championship-caliber performance ensures Falken consistently engineers products that keep drivers confident, families safe, and enthusiasts excited to get behind the wheel.

Whatever you do and wherever you go, our goal is to make your driving experience more memorable, more enjoyable, and more exceptional.

At Falken, we believe that all paths lead you home. And we know it's our job to get you there.

All Paths Lead To

SAFETY

All Lanes Lead To

FUN

All Tracks Lead To

WINNING



All Roads Lead To

LONGEVITY

All Trails Lead To

ADVENTURE

CONTENTS

WILDPEAK M/T	1 - 4
WILDPEAK R/T	5 - 8
WILDPEAK A/T4W	9 - 12
WILDPEAK A/T TRAIL	13 - 16
WILDPEAK H/T02	17 - 20
RUBITREK A/T	21 - 24
AZENIS RT660+	25 - 28
AZENIS RT615K+	29 - 32
AZENIS FK510	33 - 36
AZENIS FK460 A/S	37 - 40
AZENIS FK460 A/S SILENT CORE	41 - 44
ZIEX ZE960 A/S	45 - 48
ZIEX CT60 A/S	49 - 52
AKLIMATE	53 - 56
SINCERA SN250 A/S	57 - 60
WINTERPEAK F-ICE 1	61 - 64
EUROWINTER HS01	65 - 68
ESPIA EPZ II	69 - 72
ESPIA EPZ II SUV	73 - 76
ORIGINAL EQUIPMENT	77 - 78
WARRANTY INFORMATION	79 - 81
LOAD AND INFLATION CHARTS	82 - 86
SPEED SYMBOL CHART	85

OUR MISSION To design, build, and deliver exceptional tires that:

■ **DEALERS**
recommend to
their customers

■ **ORIGINAL EQUIPMENT
MANUFACTURERS**
select for their vehicles

■ **CONSUMERS**
ask for by name

2025 PRODUCT LINEUP

WILDPEAK



M/T

MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN



R/T

BOLD, RUGGED TERRAIN CAPABILITY



A/T4W

ALL-TERRAIN, ALL-WEATHER RUGGED CAPABILITY

AZENIS



NEW!

RT660+

PERFORMANCE REFINED BY ENTHUSIASTS



RT615K+

COMPETITION-PROVEN PERFORMANCE FOR ENTHUSIASTS



FK510

SUMMER ULTRA HIGH PERFORMANCE



A/T TRAIL

RUGGED CROSSOVER CAPABILITY ENGINEERED FOR ADVENTURE



H/T02

RUGGED ALL-SEASON DURABILITY BUILT FOR TODAY'S PICKUP TRUCKS

RUBITREK



A/T

VERSATILE ALL-TERRAIN TRACTION



FK460 A/S

ULTRA HIGH PERFORMANCE FOR EVERY SEASON



NEW!

FK460 A/S SILENTCORE

ELECTRIC ULTRA HIGH PERFORMANCE FOR EVERY SEASON



ZIEX

ZE960 A/S

DYNAMIC ALL-SEASON HIGH PERFORMANCE

WINTERPEAK



F-ICE 1

STUDDABLE SAFETY IN ANY WINTER CONDITION

EUROWINTER



HS01

HIGH PERFORMANCE WINTER CAPABILITY

ESPIA



EPZ II / EPZ II SUV

CONFIDENT WINTER TRACTION / CONFIDENT WINTER PERFORMANCE DESIGNED FOR SUVs

SINCERA



SN250 A/S

LONG LASTING ALL-SEASON PERFORMANCE TOURING

AKLIMATE



ALL-WEATHER

ALL-AROUND PERFORMANCE BUILT FOR ANY CLIMATE



CT60 A/S

PREMIUM ALL-SEASON PERFORMANCE AND SAFETY FOR CROSSOVERS



LT 1 SUV

WILDPEAK MIT

MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN



- Trusted by the Pros to Take on The Hardest Conditions
- 3-Ply DURASPEC Sidewall with Two High Ply Turn-Ups
- Quiet Comfortable Ride on the Highway
- Advanced Off-Road Handling
- Additional Traction at Low Air Pressures on Rugged Terrain


AVAILABLE IN
28 SIZES

RIM SIZING
15"- 22"

SPEED RATING
Q



PERFORMANCE RATINGS

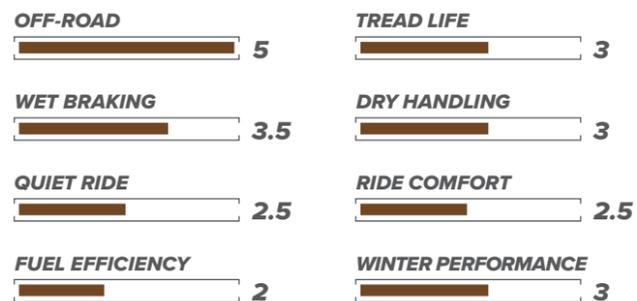

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|-------------------|
| CHEVROLET SILVERADO | NISSAN XTERRA |
| FORD F-SERIES | RAM TRUCKS |
| JEEP CHEROKEE | TOYOTA FJ CRUISER |
| JEEP WRANGLER | TOYOTA TACOMA |
| NISSAN TITAN | TOYOTA TUNDRA |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



RUGGED AND RIGID TREAD BLOCKS

feature step down supports on the center blocks to provide tread-pattern rigidity in the contact patch, enhancing stability and handling while preventing stones from becoming trapped in the grooves.



MUD AND ROCK DEFENSE FEATURES

shed mud from the tread grooves to prevent loss of traction, ensuring maximum grip while preventing rocks from puncturing the base of the tread.



DURASPEC™ 3-PLY SIDEWALL

along with offset shoulder blocks protect the tire from sharp rocks and provide additional off-road traction at low tire pressures or in off-camber situations.



OPTIMIZED TREAD PATTERN

with three variable pitches, positions the tread blocks to provide an exceptionally quiet ride

WILDPEAK MIT

LEARN MORE



WILDPEAK MIT

MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)
15"	28516312	30x9.50R15LT	C	6	104Q	6.5 - 8.5	7.5	29.6	9.6	713	19	46.5	1985	50
	28516322	31x10.50R15LT	C	6	109Q	7.0 - 9.0	8.5	30.7	10.5	687	19	54.0	2270	50
	28516518	33x12.50R15LT	C	6	108Q	8.5 - 11.0	10.0	32.6	13.0	650	21	75.0	2205	35
	28516920	35x12.50R15LT	C	6	113Q	8.5 - 11.0	10.0	34.5	12.9	617	21	76.7	2535	35
16"	28516994	LT235/85R16	E	10	120/116Q	6.0 - 7.5	6.5	31.8	9.2	656	18	52.7	3042 / 2778	80
	28516628	LT245/75R16	E	10	120/116Q	6.5 - 8.0	7.0	30.4	9.9	686	18	55.3	3042 / 2778	80
	28516036	LT255/85R16	E	10	123/120Q	6.5 - 8.0	7.0	33.1	10.2	643	19	59.1	3415 / 3085	80
	28516639	LT265/75R16	E	10	123/120Q	7.0 - 8.0	7.5	32.0	10.6	653	19	60.0	3415 / 3085	80
	28516611	LT285/75R16	E	10	126/123Q	7.5 - 9.0	8.0	32.7	11.5	638	20	67.7	3750 / 3415	80
	28516934	LT315/75R16	E	10	127/124Q	8.0 - 11.0	8.5	34.7	12.6	603	21	77.8	3860 / 3525	65
17"	28516616	LT235/80R17	E	10	120/117Q	6.0 - 7.5	6.5	32.0	9.2	651	18	51.6	3085 / 2835	80
	28516714	LT255/75R17	C	6	111/108Q	6.5 - 8.5	7.0	32.3	10.2	646	18	53.1	2405 / 2205	50
	28516702	LT265/70R17	E	10	121/118Q	7.0 - 8.5	8.0	31.7	10.6	659	19	56.9	3195 / 2910	80
	59000360	LT285/70R17	C	6	116/113Q	7.5 - 9.0	8.5	32.8	11.0	634	18	61.3	2755 / 2535	50
	28516612	LT285/70R17	E	10	121/118Q	7.5 - 9.0	8.5	32.9	11.4	635	20	63.3	3195 / 2910	80
	28516936	LT295/70R17	E	10	121/118Q	7.5 - 10.0	8.5	33.4	11.7	625	20	69.0	3195 / 2910	80
	28516932	LT315/70R17	E	10	121/118Q	8.0 - 11.0	9.5	34.6	12.8	604	20	80.7	3195 / 2910	65
	28516710	33x12.50R17LT	E	10	120Q	8.5 - 11.0	10.0	32.7	12.5	643	21	68.8	3085	65
	28516995	35x12.50R17LT	E	10	121Q	8.5 - 11.0	10.0	34.8	13.0	609	21	79.6	3195	65
	28516921	37x12.50R17LT	D	8	124Q	8.5 - 11.0	10.0	36.7	12.9	577	21	81.8	3525	50
28516734	38x13.50R17LT	D	8	128Q	9.0 - 11.5	11.0	37.8	13.6	562	21	92.6	3860	50	

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)
18"	28516703	LT275/70R18	E	10	125/122Q	7.0 - 9.0	8.0	33.4	10.9	624	20	66.1	3640 / 3305	80
	28516827	LT285/65R18	E	10	125/122Q	8.0 - 10.0	8.5	32.8	11.6	637	19	64.6	3640 / 3305	80
	28516999	35x12.50R18LT	E	10	123Q	8.5 - 11.0	10.0	34.7	13.0	607	21	78.7	3415	65
20"	28516952	LT305/55R20	E	10	121/118Q	8.5 - 11.0	9.5	33.3	12.3	625	19	70.1	3195 / 2910	65
	28516906	33x12.50R20LT	E	10	114Q	8.5 - 11.0	10.0	32.8	12.7	638	21	70.3	2600	65
	28516905	35x12.50R20LT	E	10	121Q	8.5 - 11.0	10.0	34.7	12.6	604	21	72.5	3195	65
	28516951	37x13.50R20LT	E	10	127Q	8.5 - 11.0	11.0	36.7	13.6	573	21	87.3	3860	65

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.





LT 1 SUV

WILDPEAK R/T

BOLD, RUGGED TERRAIN CAPABILITY



- Ultimate Hybrid Terrain Dependability
- Durable Off-Road Traction
- 50,000-Mile Limited Tread Life Warranty
- Powerful Support for Towing and Hauling
- Best of Both Worlds – M/T and A/T

AVAILABLE IN
49 SIZES


RIM SIZING
16"- 22"

SPEED RATING
R



*Designed specifically to meet the demands of today's high-powered trucks, HD sizes of the Wildpeak R/T provide increased capability for high-torque, diesel, towing and hauling applications.

PERFORMANCE RATINGS

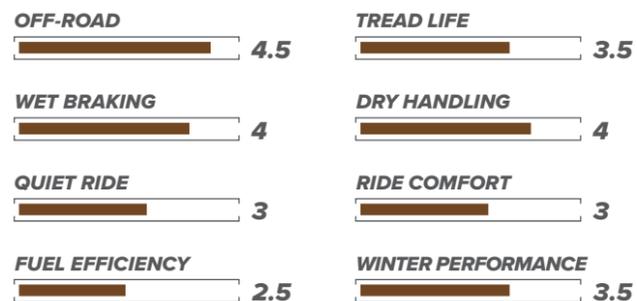

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|----------------|
| CHEVROLET COLORADO | JEEP WRANGLER |
| CHEVROLET SILVERADO | RAM TRUCKS |
| FORD BRONCO | TOYOTA 4RUNNER |
| FORD F-SERIES | TOYOTA TACOMA |
| JEEP GLADIATOR | TOYOTA TUNDRA |

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



HYBRID TREAD PATTERN features a high-contact-ratio center to increase the amount of rubber that meets the road, ensuring the R/T provides the stability and road manners expected on the highway.



AGGRESSIVE UPPER SIDEWALL features protect the tire from sharp rocks, while offset shoulder blocks provide claw-like traction at low tire pressures and in off-camber situations.



WIDE OPEN SHOULDERS with mud and rock defense features shed mud from the tread grooves, enhancing off-road traction and preventing rocks from puncturing the base of the tread.



TECTONIC TREAD BLOCKS with step-down support features were engineered to minimize block squirm, enhancing stability when towing and hauling.

WILDPEAK R/T

LEARN MORE



WILDPEAK R/T

BOLD, RUGGED TERRAIN CAPABILITY

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Sidewall Stamp	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)
16"	28757867	LT265/75R16	E	10	123/120R	HD	7.0 - 8.0	7.5	31.9	10.7	655	18	51.0	3415 / 3085	80
	28757499	LT285/75R16	E	10	126/123R	HD DURASPEC	7.5 - 9.0	8.0	33.1	11.5	633	18	65.1	3750 / 3415	80
17"	28757187	LT255/80R17	E	10	121/118R	HD DURASPEC	6.5 - 8.5	7.0	33.3	10.3	627	18	59.9	3195 / 2910	80
	28757467	LT265/70R17	E	10	121/118R	HD	7.0 - 8.5	8.0	31.9	10.9	653	18	52.4	3195 / 2910	80
	28757747	LT285/70R17	C	6	116/113R	DURASPEC	7.5 - 9.0	8.5	33.0	12.0	632	16	63.4	2755 / 2535	50
	28757808	LT285/70R17	E	10	121/118R	HD DURASPEC	7.5 - 9.0	8.5	33.0	12.0	632	18	64.9	3195 / 2910	80
	28757474	LT285/75R17	C	6	117/114R	DURASPEC	7.5 - 9.5	8.0	34.1	11.5	613	16	66.4	2835 / 2600	50
	28757460	LT285/75R17	E	10	128/125R	HD DURASPEC	7.5 - 9.5	8.0	34.1	11.5	613	18	65.8	3970 / 3640	80
	28757344	LT315/70R17	D	8	121/118R	DURASPEC	8.0 - 11.0	9.5	34.6	13.0	604	16	76.3	3195 / 2910	50
	28757753	33x12.50R17LT	E	10	120R	STANDARD	8.5 - 11.0	10.0	32.8	12.8	643	16	61.9	3085	65
	28757278	35x11.50R17LT	C	6	118R	DURASPEC	7.5 - 10.0	9.0	34.8	11.7	609	16	66.8	2910	50
	28757103	35x12.50R17LT	E	10	125R	HD DURASPEC	8.5 - 11.0	10.0	34.8	13.0	602	20	79.2	3640	65
18"	28757264	37x12.50R17LT	E	10	128R	HD DURASPEC	8.5 - 11.0	10.0	36.8	12.8	576	20	81.8	3970	65
	28757506	37x13.50R17LT	E	10	128R	HD DURASPEC	8.5 - 11.0	11.0	36.8	13.8	576	20	89.4	3970	65
	28757267	38x13.50R17LT	D	8	127R	HD DURASPEC	8.5 - 11.0	11.0	37.8	13.8	562	20	87.3	3860	50
	28757443	LT275/65R18	E	10	123/120R	HD	7.5 - 9.0	8.0	32.3	11.2	646	18	54.8	3415 / 3085	80
	28757431	LT275/70R18	E	10	125/122R	HD	7.0 - 8.5	8.0	33.4	11.2	624	18	59.0	3640 / 3305	80
	28757935	LT285/65R18	E	10	125/122R	HD	8.0 - 10.0	8.5	32.8	11.7	637	18	59.0	3640 / 3305	80
	28757714	LT285/70R18	E	10	127/124R	HD DURASPEC	7.5 - 9.5	8.5	34.0	11.7	614	18	70.4	3860 / 3525	80
	28757495	LT285/75R18	E	10	129/126R	HD DURASPEC	7.5 - 9.5	8.0	35.1	11.5	595	18	69.5	4080 / 3750	80
	28757728	LT295/70R18	E	10	129/126R	HD DURASPEC	7.5 - 10.0	8.5	34.5	12.0	604	19	75.9	4080 / 3750	80
	28757550	33x12.50R18LT	E	10	118R	STANDARD	8.5 - 11.0	10.0	32.8	12.8	642	16	65.3	2910	65
28757667	35x11.50R18LT	C	6	117R	STANDARD	7.5 - 10.0	9.0	34.8	11.7	607	16	64.2	2835	50	
28757364	35x12.50R18LT	F	12	128R	HD DURASPEC	8.5 - 11.0	10.0	34.8	12.8	607	20	76.7	3970	80	
28757676	37x12.50R18LT	E	10	128R	HD DURASPEC	8.5 - 11.0	10.0	36.8	12.8	575	20	82.1	3970	65	
28757464	37x13.50R18LT	E	10	128R	HD DURASPEC	8.5 - 11.0	11.0	36.8	13.8	575	20	89.8	3970	65	

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Sidewall Stamp	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)
20"	28757482	LT275/55R20	E	10	120/117R	HD	7.5 - 9.5	8.5	32.1	11.4	648	18	57.4	3085 / 2835	80
	28757779	LT275/60R20	E	10	123/120R	HD	7.5 - 9.5	8.0	33.2	11.2	627	18	62.5	3415 / 3085	80
	28757133	LT275/65R20	E	10	126/123R	HD	7.5 - 9.5	8.0	34.3	11.2	608	18	62.9	3750 / 3415	80
	28757204	LT285/55R20	E	10	122/119R	HD	8.0 - 10.0	9.0	32.6	11.9	603	18	61.8	3305 / 3000	80
	28757716	LT285/60R20	E	10	125/122R	HD	8.0 - 10.0	8.5	33.7	11.7	619	18	65.6	3640 / 3305	80
	28757782	LT285/65R20	E	10	127/124R	HD	8.0 - 10.0	8.5	34.8	11.7	600	18	65.1	3860 / 3525	80
	28757880	LT295/55R20	E	10	123/120R	HD	8.0 - 10.0	9.5	33.0	12.4	632	19	64.5	3415 / 3085	80
	28757636	LT295/60R20	E	10	126/123R	HD	8.0 - 10.0	8.5	34.2	12.0	611	19	69.3	3750 / 3415	80
	28757784	LT295/65R20	E	10	129/126R	HD	8.0 - 10.0	8.5	35.4	12.0	591	19	70.4	4080 / 3750	80
	28757504	LT305/55R20	F	12	125/122R	HD	8.5 - 11.0	9.5	33.5	12.7	623	19	67.8	3640 / 3305	80
	28757159	33x12.50R20LT	E	10	114R	STANDARD	8.5 - 11.0	10.0	32.8	12.8	638	16	64.9	2600	65
	28757654	35x11.50R20LT	D	8	120R	STANDARD	8.0 - 10.5	9.0	34.8	11.7	604	16	64.2	3085	65
	28757210	35x12.50R20LT	F	12	125R	HD DURASPEC	8.5 - 11.0	10.0	34.8	13.0	604	20	78.5	3640	80
	28757130	35x13.50R20LT	F	12	126R	HD	9.5 - 12.0	11.0	34.8	13.8	604	20	77.3	3750	80
	28757915	37x11.50R20LT	E	10	128R	HD DURASPEC	7.5 - 10.0	9.0	36.8	11.7	572	20	75.6	3970	80
	28757697	37x12.50R20LT	E	10	126R	HD DURASPEC	8.5 - 11.0	10.0	36.8	12.8	572	20	81.6	3750	65
	28757732	37x13.50R20LT	E	10	127R	HD DURASPEC	8.5 - 11.0	11.0	36.8	13.8	572	20	94.2	3860	65
	28757396	38x13.50R20LT	E	10	128R	HD DURASPEC	9.5 - 12.0	11.0	37.8	13.8	558	20	90.2	3970	65
22"	28757523	LT285/55R22	E	10	124/121R	HD	8.0 - 10.0	9.0	34.6	11.9	635	18	68.6	3525 / 3195	80
	28757349	LT325/50R22	F	12	127R	HD	9.0 - 12.0	10.0	35.1	13.5	592	20	77.6	3860	80
	28757974	35x12.50R22LT	E	10	117R	STANDARD	8.5 - 11.0	10.0	34.8	12.8	599	16	70.2	2835	65
	28757655	37x12.50R22LT	F	12	127R	HD	9.0 - 11.5	10.0	36.8	12.8	569	20	78.7	3860	80
	28757416	37x13.50R22LT	F	12	128R	HD	8.5 - 11.0	11.0	36.8	13.8	569	20	82.1	3970	80

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes





LT I SUV

WILDPEAK A/T4W

ALL-TERRAIN, ALL-WEATHER RUGGED CAPABILITY



- Up to 65,000 Miles of Smooth On-Road Driving
- Increased Off-Road Capability
- Handle the Toughest Terrain with Robust Sidewall Protection
- Improved Towing Performance Compared to Wildpeak A/T3W
- Severe Snow Rated for All-Weather Traction

AVAILABLE IN
96 SIZES


RIM SIZING
15"- 22"

SPEED RATING
R / S / T / H



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.

PERFORMANCE RATINGS

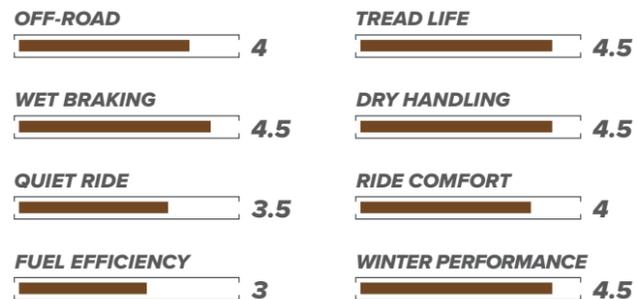

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|----------------|
| CHEVROLET COLORADO | NISSAN TITAN |
| CHEVROLET SILVERADO | RAM TRUCKS |
| FORD F-SERIES | TOYOTA 4RUNNER |
| JEEP CHEROKEE | TOYOTA TACOMA |
| NISSAN FRONTIER | TOYOTA TUNDRA |

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



STAGGERED SHOULDER BLOCKS provide additional traction in rugged off-road conditions.



THREE-PLY DURASPEC™ SIDEWALL technology on select sizes ensures the A/T4W can handle the toughest terrain.



INCREASED TREAD RIGIDITY along with the introduction of Heavy Duty LT-rated sizes, ensures the A/T4W delivers an improved towing experience compared to the A/T3W.



ALL-NEW RUBBER COMPOUND means the A/T4W offers up to a 65,000-mile Limited Tread Life Warranty (60,000-mile for LT sizes).

WILDPEAK A/T4W

LEARN MORE



WILDPEAK A/T4W

ALL-TERRAIN, ALL-WEATHER RUGGED CAPABILITY

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Sidewall Stamp	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
15"	28844151	225/75R15	XL	-	106T	STANDARD	6.0 - 7.5	6.0	28.3	8.8	747	13	35.1	2094	50	660-B-B
	28844108	235/75R15	XL	-	109T	STANDARD	6.0 - 8.0	6.5	28.9	9.3	734	13	38.8	2271	50	660-B-B
	28847272	LT215/75R15	D	8	106/103R	STANDARD	5.5 - 7.0	6.0	27.7	8.6	752	16	37.5	2095/1930	65	-
	28847202	LT235/75R15	E	10	116/113R	HD	6.0 - 7.0	6.5	28.8	9.3	724	17	40.5	2755/2535	80	-
	28840112	30x9.5R15LT	C	6	104S	STANDARD	6.5 - 8.5	7.5	30.0	9.8	705	17	43.2	1985	50	-
	28840114	31x10.5R15LT	C	6	109S	STANDARD	7.0 - 9.0	8.5	31.1	11.0	681	17	50.3	2270	50	-
	28847115	32x11.5R15LT	C	6	113R	STANDARD	8.0 - 10.0	9.0	32.1	11.9	660	18	55.6	2535	50	-
	28847116	33x12.50R15LT	C	6	108R	STANDARD	8.5 - 11.0	10.0	33.1	13.1	642	19	59.8	2205	35	-
	28847117	35x12.50R15LT	C	6	113R	STANDARD	AVAILABLE Q4 2025									
	16"	28847745	225/75R16C	(E)	-	121/120R	STANDARD	6.0 - 7.0	6.0	29.2	8.8	713	16	41.2	3195/3085	83
28847033		235/65R16C	(E)	-	121/119R	STANDARD	6.5 - 7.5	7.0	28.1	9.4	745	17	42.2	3195/3000	83	-
28844109		235/70R16	XL	-	109T	STANDARD	6.0 - 8.0	7.0	29.0	9.4	729	13	38.2	2271	50	660-A-B
28844146		245/75R16	XL	-	115T	STANDARD	6.5 - 8.0	7.0	30.5	9.8	694	13	41.2	2679	50	660-A-B
28844657		255/70R16	XL	-	115T	STANDARD	6.5 - 8.5	7.5	30.1	10.2	703	13	44.0	2679	50	660-A-B
28844667		265/70R16	SL	-	112T	STANDARD	7.0 - 9.0	8.0	30.6	10.7	692	14	45.6	2469	51	660-A-B
28844301		265/75R16	SL	-	116T	STANDARD	7.0 - 9.0	7.5	31.7	10.5	671	14	45.1	2756	51	660-A-B
28847017		LT215/85R16	E	10	115/112R	HD	5.5 - 7.0	6.0	30.4	8.7	686	16	43.1	2680/2470	80	-
28840119		LT225/75R16	E	10	115/112S	HD	6.0 - 7.0	6.0	29.2	8.8	713	16	41.6	2680/2470	80	-
28840994		LT235/85R16	E	10	120/116S	HD	6.0 - 7.5	6.5	31.7	9.6	658	17	48.5	3042/2778	80	-
28840628		LT245/75R16	E	10	120/116S	HD	6.5 - 8.0	7.0	30.3	9.8	690	17	47.6	3042/2778	80	-
28840034		LT255/85R16	C	6	112/109S	DURASPEC	6.5 - 8.0	7.0	33.1	10.3	633	17	58.4	2470/2270	50	-
28840639		LT265/75R16	E	10	123/120S	HD	7.0 - 8.0	7.5	31.9	10.8	655	17	53.0	3415/3085	80	-
28847611		LT285/75R16	E	10	126/123R	HD, DURASPEC	7.5 - 9.0	8.0	33.1	11.6	633	18	62.6	3750/3415	80	-
28847641		LT305/70R16	E	10	124/121R	HD	8.0 - 9.5	9.0	32.8	12.6	637	18	63.1	3525/3195	65	-
28847124	LT315/75R16	E	10	127/124R	HD, DURASPEC	8.0 - 11.0	8.5	34.6	12.7	605	19	76.6	3860/3525	65	-	
17"	28844913	285/70R17	SL	-	116T	STANDARD	7.5 - 9.5	8.5	32.8	11.5	647	14	53.4	2756	51	660-A-B
	28844782	215/65R17	SL	-	99T	STANDARD	6.0 - 7.5	6.5	28.0	8.7	756	13	32.6	1709	51	660-B-B
	28844775	225/65R17	XL	-	106T	STANDARD	6.0 - 8.0	6.5	28.5	9.0	743	13	34.8	2094	50	660-B-B
	28841790	235/65R17	SL	-	104H	STANDARD	6.5 - 8.5	7.0	29.1	9.4	731	13	38.2	1984	51	660-A-A
	28844737	235/75R17	SL	-	109T	STANDARD	6.0 - 8.0	6.5	30.9	9.3	683	13	40.8	2271	51	660-A-B
	28844768	245/65R17	XL	-	111T	STANDARD	7.0 - 8.5	7.0	29.5	9.8	719	13	41.9	2403	50	660-A-B
	28844747	245/70R17	XL	-	114T	STANDARD	6.5 - 8.0	7.0	30.6	9.8	691	13	40.9	2601	50	660-A-B
	28844713	255/65R17	XL	-	114T	STANDARD	7.0 - 9.0	7.5	30.1	10.2	708	13	42.4	2601	50	660-A-B
	28844769	255/70R17	SL	-	112T	STANDARD	6.5 - 8.5	7.5	31.1	10.2	679	13	43.0	2469	51	660-A-B
	28844721	265/65R17	XL	-	116T	STANDARD	7.5 - 9.5	8.0	30.6	10.7	697	13	45.3	2756	50	660-A-B
	28844300	265/70R17	SL	-	115T	STANDARD	7.0 - 9.0	8.0	31.7	10.7	668	14	47.6	2679	51	660-A-B
	28847616	LT235/80R17	E	10	120/117R	HD	6.0 - 7.5	6.5	31.8	9.4	655	17	47.1	3085/2835	80	-
	28840718	LT245/70R17	E	10	119/116S	HD	6.5 - 8.0	7.0	30.8	9.8	676	17	49.1	3000/2755	80	-
	28840601	LT245/75R17	E	10	121/118S	HD	6.5 - 7.5	7.0	31.8	9.8	657	17	49.8	3195/2910	80	-
	28840338	LT255/80R17	E	10	123/120S	HD, DURASPEC	6.5 - 8.5	7.0	33.0	10.3	632	17	58.1	3415/3085	80	-
	28840712	LT265/70R17	E	10	123/120S	HD	7.0 - 8.5	8.0	31.9	11.2	625	17	53.2	3415/3085	80	-
	28840722	LT275/70R17	C	6	114/110S	STANDARD	7.0 - 8.5	8.0	32.2	11.0	648	18	58.1	2600/2335	50	-
	28847543	LT285/70R17	C	6	116/113R	DURASPEC	7.5 - 9.0	8.5	33.0	11.5	632	18	65.4	2755/2535	50	-
	28840612	LT285/70R17	E	10	126/123S	HD, DURASPEC	7.5 - 9.0	8.5	33.0	11.5	632	18	65.4	3750/3415	80	-
	28847839	LT285/75R17	C	6	117/114R	DURASPEC	7.5 - 9.5	8.0	34.1	11.6	613	18	67.9	2835/2600	50	-
28840588	LT285/75R17	E	10	128/125S	HD, DURASPEC	7.5 - 9.5	8.0	34.1	11.6	613	18	67.4	3970/3640	80	-	
28840144	LT315/70R17	C	6	113/110S	DURASPEC	8.0 - 11.0	9.5	34.7	13.1	602	19	75.7	2535/2335	35	-	
28847336	35x11.5R17LT	C	6	118R	DURASPEC	7.5 - 10.0	9.0	35.0	11.9	604	18	68.5	2910	50	-	
28847282	35x12.50R17LT	E	10	125R	HD, DURASPEC	8.5 - 11.0	10.0	35.1	12.8	602	19	78.2	3640	65	-	
28847341	37x12.50R17LT	E	10	128R	HD, DURASPEC	8.5 - 11.0	10.0	37.0	13.1	573	19	78.3	3970	65	-	
28847734	38x13.5R17LT	D	8	127R	HD, DURASPEC	AVAILABLE Q3 2025										

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Sidewall Stamp	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
18"	28844841	255/70R18	SL	-	113T	STANDARD	6.5 - 8.5	7.5	32.1	10.2	658	13	44.6	2535	51	660-A-B
	28844854	265/60R18	XL	-	114T	STANDARD	7.5 - 9.5	8.0	30.5	10.7	696	13	42.8	2601	50	660-A-B
	28844823	265/65R18	SL	-	114T	STANDARD	7.5 - 9.5	8.0	31.5	10.7	675	13	46.8	2601	51	660-A-B
	28844809	265/70R18	SL	-	116T	STANDARD	7.0 - 9.0	8.0	32.6	10.7	646	14	50.2	2756	51	660-A-B
	28844901	275/65R18	SL	-	116T	STANDARD	7.5 - 9.5	8.0	32.1	11.0	663	14	48.6	2756	51	660-A-B
	28844888	285/65R18	SL	-	116T	STANDARD	8.0 - 10.0	8.5	32.6	11.5	655	14	51.4	2756	51	660-A-B
	28847324	LT265/65R18	E	10	122/119R	HD	7.5 - 9.5	8.0	31.7	10.7	661	17	54.5	3305/3000	80	-
	28840233	LT265/70R18	E	10	124/121S	HD	7.0 - 9.0	8.0	33.0	11.2	624	17	57.2	3525/3195	80	-
	28840803	LT275/65R18	E	10	123/120S	HD	7.5 - 9.0	8.0	32.2	10.9	649	18	57.1	3415/3085	80	-
	28840886	LT275/70R18	E	10	125/122S	HD	7.0 - 9.0	8.0	33.4	11.2	624	18	60.3	3640/3305	80	-
	28840827	LT285/65R18	E	10	125/122S	HD	8.0 - 10.0	8.5	32.6	11.7	642	18	60.3	3640/3305	80	-
	28840692	LT285/70R18	C	6	117/114S	DURASPEC	7.5 - 9.5	8.5	34.0	11.5	614	18	68.0	2835/2600	50	-
	28840115	LT285/75R18	E	10	129/126S	HD, DURASPEC	7.5 - 9.5	8.0	35.0	11.6	598	18	67.2	4080/3750	80	-
	28847589	LT295/70R18	E	10	129/126R	HD, DURASPEC	7.5 - 10.0	8.5	34.3	12.2	609	18	69.2	4080/3750	80	-
	28847335	LT305/65R18	F	12	128/125R	HD	8.5 - 11.0	9.0	33.8	12.2	620	18	67.0	3970/3640	80	-
28844599	LT325/65R18	D	8	121/118T	DURASPEC	9.0 - 12.0	9.5	34.6	13.2	605	19	75.4	3195/2910	50	-	
28840266	35x11.5R18LT	C	6	117S	STANDARD	7.5 - 10.0	9.0	34.9	11.9	604	18	62.6	2835	50	-	
28847580	35x12.5R18LT	F	12	128R	HD, DURASPEC	8.5 - 11.0	10.0	35.1	13.0	601	19	73.9	3970	80	-	
28847197	37x12.50R18LT	E	10	128R	HD, DURASPEC	AVAILABLE Q2 2025										
20"	28844456	265/60R20	SL	-	112T	STANDARD	7.5 - 9.5	8.0	32.5	10.7	650	13</				



CUV / SUV

WILDPEAK A/T TRAIL

RUGGED CROSSOVER CAPABILITY ENGINEERED FOR ADVENTURE



- First All-Terrain Tire Specifically Designed for Crossovers
- Severe Snow Rated for All-Weather Traction
- 65,000-Mile Limited Tread Life Warranty
- Off-Road Durability
- On-Road Dependability

AVAILABLE IN
45 SIZES


RIM SIZING
15"- 21"

SPEED RATING
T / H / V



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.

PERFORMANCE RATINGS

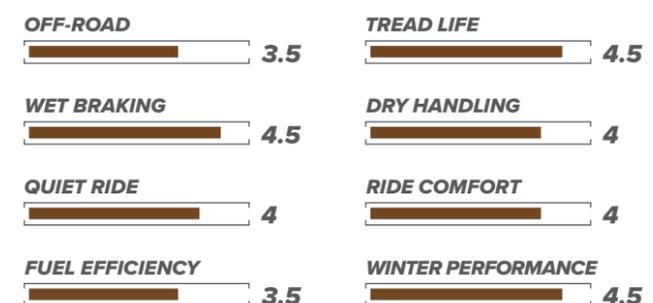

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-------------------|------------------|
| CHEVROLET EQUINOX | MAZDA CX-5 |
| FORD ESCAPE | NISSAN ROGUE |
| HONDA CR-V | SUBARU CROSSTREK |
| JEEP CHEROKEE | SUBARU OUTBACK |
| JEEP RENEGADE | TOYOTA RAV4 |
| TRAILHAWK | |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



TIRE HIGHLIGHTS

3D CANYON SIPE TECHNOLOGY
and increased tread depth provide more winter traction than a traditional all-season tire.

CROSSOVER-SPECIFIC DESIGN
matches a CUV's unibody construction and higher center of gravity to provide enhanced handling year-round.

RUGGED UPPER SIDEWALL
features durable 2-ply polyester construction protect the tire from sharp rocks and off-road terrain.

OPTIMIZED TREAD DESIGN
features Falken's silica-enriched tread compound to deliver superior wear life over a wide range of operating temperatures.

WILDPEAK A/T TRAIL

LEARN MORE



WILDPEAK A/T TRAIL

RUGGED CROSSOVER CAPABILITY ENGINEERED FOR ADVENTURE

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.	
15"	28711105	215/75R15	SL	100T	5.5 - 7.0	6.0	27.7	8.5	765	10	30.9	1764	51	640-B-B	
	28711108	235/75R15	SL	105T	6.0 - 8.0	6.0	28.9	9.3	734	10	35.1	2039	51	640-A-B	
16"	28711652	205/60R16	SL	92H	5.5 - 7.5	6.0	25.7	8.2	824	11	25.6	1389	51	680-A-A	
	28711481	205/70R16	SL	97H	5.0 - 7.0	6.0	27.3	8.1	770	10	25.8	1609	51	680-A-A	
	28712681	215/65R16	XL	102H	6.0 - 7.5	6.5	27.1	8.6	783	11	28.0	1874	50	680-A-A	
	28711100	215/70R16	SL	100H	5.5 - 7.0	6.5	27.8	8.7	757	10	26.9	1764	51	680-A-A	
17"	28712727	215/55R17	SL	94V	6.0 - 7.5	7.0	26.3	8.9	800	11	26.9	1477	51	680-A-A	
	28712729	215/60R17	SL	96H	6.0 - 7.5	6.5	27.2	8.7	777	11	27.8	1565	51	680-A-A	
	28714782	215/65R17	SL	99H	6.0 - 7.5	6.5	28.0	8.6	756	11	28.9	1709	51	680-A-A	
	28712762	225/55R17	XL	101V	6.0 - 8.0	7.0	26.8	9.2	788	11	29.8	1819	50	680-A-A	
	28712728	225/60R17	SL	99H	6.0 - 8.0	6.5	27.7	9.0	764	11	29.3	1709	51	680-A-A	
	28711775	225/65R17	SL	102H	6.0 - 8.0	6.5	28.6	8.9	741	11	30.0	1874	51	680-A-A	
	28712725	235/55R17	XL	103V	6.5 - 8.5	7.5	27.2	9.6	777	11	32.0	1929	50	680-A-A	
	28711717	235/60R17	SL	102H	6.5 - 8.5	7.0	28.1	9.5	753	11	32.6	1874	51	680-A-A	
	28712790	235/65R17	XL	108H	6.5 - 8.5	7.0	29.2	9.4	729	11	35.1	2205	50	680-A-A	
	28711768	245/65R17	SL	107H	7.0 - 8.5	7.0	29.5	9.7	719	11	37.9	2149	51	680-A-A	
18"	28711900	215/55R18	SL	95H	6.0 - 7.5	7.0	27.3	8.9	771	11	28.4	1521	51	680-A-A	
	28712805	225/50R18	SL	95V	6.0 - 8.0	7.0	26.9	9.2	782	11	27.8	1521	51	680-A-A	
	28712889	225/55R18	SL	98V	6.0 - 8.0	7.0	27.6	9.2	763	11	29.8	1653	51	680-A-A	
	28711826	225/60R18	SL	100H	6.0 - 8.0	6.5	28.7	9.0	737	11	30.2	1764	51	680-A-A	
	28712825	235/50R18	SL	97V	6.5 - 8.5	7.5	27.3	9.5	768	11	32.4	1609	51	680-A-A	
	28712817	235/55R18	SL	100V	6.5 - 8.5	7.5	28.1	9.6	750	11	33.3	1764	51	680-A-A	
	28712816	235/60R18	XL	107H	6.5 - 8.5	7.0	29.3	9.3	721	11	34.2	2149	50	680-A-A	
	28712815	235/65R18	SL	106H	6.5 - 8.5	7.0	30.2	9.4	702	11	36.8	2094	51	680-A-A	
	28712811	245/60R18	SL	105H	7.0 - 8.5	7.0	29.7	9.7	714	11	36.4	2039	51	680-A-A	
	28714783	245/65R18	XL	110H											AVAILABLE Q1 2025
	28712845	255/55R18	XL	109V	7.0 - 9.0	8.0	28.9	10.5	730	11	37.5	2271	50	680-A-A	
	28711822	255/65R18	SL	111H	7.0 - 9.0	7.5	31.1	10.2	683	11	41.2	2403	51	680-A-A	

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
19"	28712955	225/55R19	SL	99V	6.0 - 8.0	7.0	28.8	9.1	730	11	33.1	1709	51	680-A-A
	28712110	235/50R19	XL	103V	6.5 - 8.5	7.5	28.3	9.6	742	11	33.5	1929	50	680-A-A
	28712970	235/55R19	XL	105V	6.5 - 8.5	7.5	29.1	9.7	723	11	34.6	2039	50	680-A-A
	28712904	245/45R19	XL	102V	7.5 - 9.0	8.0	27.7	9.6	752	11	32.0	1874	51	680-A-A
	28712814	245/55R19	SL	103V	7.0 - 8.5	7.5	29.7	9.9	709	11	35.3	1929	51	680-A-A
	28712949	255/50R19	XL	107V	7.0 - 9.0	8.0	29.1	10.4	723	11	37.5	2149	50	640-A-A
	28712943	255/55R19	XL	111V	7.0 - 9.0	8.0	30.0	10.4	704	11	37.5	2403	50	680-A-A
	28711813	255/60R19	SL	109H	7.0 - 9.0	7.5	31.1	10.2	680	11	39.5	2271	51	680-A-A
20"	28712031	235/55R20	SL	102V	6.5 - 8.5	7.5	30.2	9.6	697	11	37.7	1874	51	680-A-A
	28712026	245/50R20	SL	102V	7.0 - 8.5	7.5	29.8	9.8	704	11	37.5	1874	51	680-A-A
	28711828	245/60R20	SL	107H	7.0 - 8.5	7.0	31.6	9.8	668	11	39.2	2149	51	680-A-A
	28712013	255/45R20	XL	105V	8.0 - 9.5	8.5	29.1	10.0	717	11	36.2	2039	50	680-A-A
	28712946	255/50R20	XL	109V	7.0 - 9.0	8.0	30.1	10.3	697	11	39.9	2271	50	680-A-A
	28712950	255/55R20	XL	110V	7.0 - 9.0	8.0	31.0	10.4	680	11	40.1	2337	50	680-A-A
	28712587	265/45R20	XL	108V	8.5 - 11.0	9.0	29.4	10.5	710	11	37.9	2205	50	680-A-A
	28712011	265/50R20	XL	111V	7.5 - 9.5	8.5	30.6	10.9	688	11	41.4	2403	50	680-A-A
21"	28712016	275/45R20	XL	110V	8.5 - 10.5	9.0	29.8	10.8	701	11	39.9	2337	50	680-A-A
	28712588	265/45R21	XL	108V	8.5 - 10.0	9.0	30.4	10.5	685	11	40.1	2205	50	680-A-A

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.



WILDPEAK HIT02

RUGGED ALL-SEASON DURABILITY BUILT FOR TODAY'S PICKUP TRUCKS

- Engineered for Today's High-Powered Pickup Trucks
- Industry-Leading Wet Braking Performance
- HD Sizes Built for Heavy Duty Towing Capability
- Rugged Sidewall Protection
- Up to 70,000 Miles of Highway Dependability

AVAILABLE IN
41 SIZES


RIM SIZING
15"- 22"

SPEED RATING
R / S / T / H



*Designed specifically to meet the demands of today's high-powered trucks, HD sizes of the Wildpeak H/T02 deliver exceptional performance for high torque, diesel, towing and hauling applications.

PERFORMANCE RATINGS

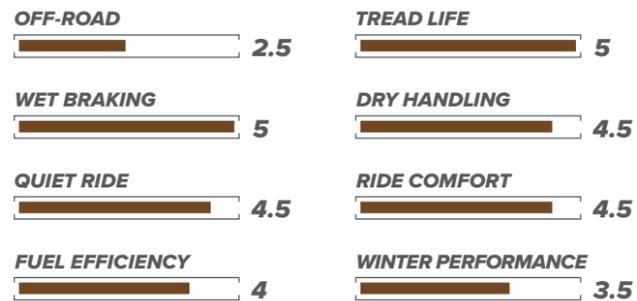

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|-----------------|
| CHEVROLET COLORADO | NISSAN TITAN |
| CHEVROLET SILVERADO | NISSAN TITAN XD |
| FORD F-SERIES | RAM TRUCKS |
| GMC SIERRA | TOYOTA TACOMA |
| NISSAN FRONTIER | TOYOTA TUNDRA |

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



LT 1 SUV

TIRE HIGHLIGHTS

3D CANYON SIPE TECHNOLOGY
interlocks the shoulders to resist wear from high torque and increases edges for enhanced all-season handling.

FOUR WIDE CIRCUMFERENTIAL GROOVES
significantly enhance hydroplaning resistance by evacuating water, helping to maintain secure contact with the road even in heavy rain.

AGGRESSIVE UPPER SIDEWALL
protects the shoulder of the tire from hazards typically encountered at construction sites or on the highway.

RIGID TREAD BLOCKS
feature a "support bridge" that provides tread pattern rigidity in the contact patch, enhancing vehicle stability and handling when towing or hauling.

WILDPEAK HIT02

LEARN MORE



WILDPEAK H102

RUGGED ALL-SEASON DURABILITY BUILT FOR TODAY'S PICKUP TRUCKS

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
15"	28824529	235/75R15	XL	-	109T	6.0 - 8.0	6.5	28.9	9.2	734	12	33.5	2271	50	700-A-B
	28824484	225/75R16	XL	-	108T	6.0 - 7.5	6.0	29.3	8.7	721	11	32.2	2205	50	700-A-B
16"	28824609	235/70R16	XL	-	109T	6.0 - 8.0	7.0	29.0	9.4	729	11	33.7	2271	50	700-A-B
	28824610	235/75R16	XL	-	112T	6.0 - 8.0	6.5	29.8	9.2	708	12	35.7	2469	50	700-A-B
	28824604	245/70R16	SL	-	107T	6.5 - 8.0	7.0	29.5	9.7	717	12	36.4	2149	51	700-A-B
	28820608	245/75R16	SL	-	111T	6.5 - 8.0	7.0	30.5	9.7	694	12	36.6	2403	51	700-A-B
	28824605	255/70R16	SL	-	111T	6.5 - 8.5	7.5	30.1	10.2	703	12	38.1	2403	51	700-A-B
	28824606	265/70R16	SL	-	112T	7.0 - 9.0	8.0	30.6	10.6	692	12	39.7	2469	51	700-A-B
	28824607	265/75R16	XL	-	116T	7.0 - 9.0	7.5	31.7	10.4	671	12	40.1	2756	50	700-A-B
	28827464	LT215/85R16	E	10	115/112R	5.5 - 7.0	6.0	30.4	8.4	686	15	40.8	2680/2469	80	-
	28820627	LT225/75R16	E	10	115/112S	6.0 - 7.0	6.0	29.3	8.7	711	14	39.0	2680/2469	80	-
	28820474	LT235/85R16	E	10	120/116S	6.0 - 7.5	6.5	31.7	9.2	658	15	48.1	3042/2756	80	-
17"	28820494	LT245/75R16	E	10	120/116S	6.5 - 8.0	7.0	30.5	9.7	684	15	45.0	3042/2756	80	-
	28820505	LT265/75R16	E	10	123/120S	7.0 - 8.0	7.5	31.7	10.4	660	15	53.6	3415/3086	80	-
	28820611	LT285/75R16	E	10	126/123S	7.5 - 9.0	8.0	32.8	11.2	637	16	60.0	3750/3417	80	-
	28824768	245/65R17	SL	-	107T	7.0 - 8.5	7.0	29.5	9.7	719	12	35.1	2149	51	700-A-B
	28824617	245/70R17	SL	-	110T	6.5 - 8.0	7.0	30.6	9.7	691	12	39.2	2337	51	700-A-B
	28824713	255/65R17	SL	-	110T	7.0 - 9.0	7.5	30.1	10.2	708	12	38.6	2337	51	700-A-B
	28824769	255/70R17	SL	-	112T	6.5 - 8.5	7.5	31.1	10.2	679	12	41.7	2469	51	700-A-B
	28824721	265/65R17	SL	-	112T	7.5 - 9.5	8.0	30.6	10.6	697	12	38.6	2469	51	700-A-B
	28824701	265/70R17	SL	-	115H	7.0 - 9.0	8.0	31.7	10.6	668	12	42.3	2679	51	700-A-A
	28827616	LT235/80R17	E	10	120/117R	6.0 - 7.5	6.5	31.8	9.2	655	15	47.4	3085/2833	80	-
HD	28827718	LT245/70R17	E	10	119/116R	6.5 - 8.0	7.0	30.6	9.7	682	15	45.6	3000/2756	80	-
	28820711	LT245/75R17	E	10	121/118S	6.5 - 7.5	7.0	31.5	9.7	661	15	44.8	3195/2910	80	-
	28820712	LT265/70R17	E	10	121/118S	7.0 - 8.5	8.0	31.7	10.6	659	15	50.3	3195/2910	80	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes.

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
18"	28821841	255/70R18	SL	--	113H	6.5 - 8.5	7.5	32.1	10.2	658	12	42.1	2535	51	700-A-A
	28821854	265/60R18	SL	--	110H	7.5 - 9.5	8.0	30.5	10.6	696	12	41.0	2337	51	700-A-A
	28821823	265/65R18	SL	--	114H	7.5 - 9.5	8.0	31.5	10.6	675	12	43.0	2601	51	700-A-A
	28824809	265/70R18	SL	--	116T	7.0 - 9.0	8.0	32.6	10.6	646	12	42.3	2756	51	700-A-B
	28821901	275/65R18	SL	--	116H	7.5 - 9.5	8.0	32.1	10.9	663	12	45.0	2756	51	700-A-A
	28820127	LT265/70R18	E	10	124/121S	7.0 - 9.0	8.0	32.6	10.6	637	15	56.4	3525/3197	80	-
	28820803	LT275/65R18	E	10	123/120S	7.5 - 9.0	8.0	32.1	10.9	651	15	56.9	3415/3086	80	-
	28820703	LT275/70R18	E	10	125/122S	7.0 - 8.5	8.0	33.2	10.9	627	16	61.1	3640/3307	80	-
20"	28821021	275/55R20	XL	--	117H	7.5 - 9.5	8.5	32.0	11.0	660	12	43.0	2833	50	700-A-A
	28821003	275/60R20	SL	--	115H	7.5 - 9.5	8.0	33.0	10.9	642	12	46.3	2679	51	700-A-A
	28821390	275/60R20	XL	--	116H	AVAILABLE Q2 2025									
	28820128	LT265/60R20	E	10	121/118S	7.5 - 9.5	8.0	32.5	10.7	640	15	52.2	3195/2910	80	-
HD	28820025	LT275/65R20	E	10	126/123S	7.5 - 9.5	8.0	34.1	10.9	611	15	61.7	3750/3417	80	-
	28821035	275/50R22	SL	--	111H	7.5 - 9.5	8.5	32.9	11.2	638	12	45.0	2403	51	700-A-A
22"	28821219	285/45R22	XL	--	114H	9.0 - 10.5	9.5	32.1	11.1	648	12	44.8	2601	50	700-A-A

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes.

HD COMMERCIAL VAN SIZES

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	3PMSF
15"	28824254	185/60R15C	C	6	94/92T	5.5 - 6.0	5.5	23.8	7.4	874	11	23.0	1475/1390	54	Yes
16"	28827502	195/75R16C	D	8	107/105R	5.0 - 6.0	5.5	27.5	7.7	755	12	28.2	2150/2040	69	Yes
	28827452	225/75R16C	(E)	-	121/120R	6.0 - 7.0	6.0	29.3	8.8	711	15	39.5	3195/3085	83	Yes
	28827163	235/65R16C	(E)	-	121/119R	6.5 - 7.5	7.0	27.9	9.5	750	15	38.9	3195/3000	83	Yes

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes.

LEARN MORE





LT 1 SUV

RUBITREK A/T

VERSATILE ALL-TERRAIN TRACTION



- Aggressive Off-Road Ability and Smooth On-Road Driving
- Long-Lasting Rugged Terrain Protection
- Severe Snow Rated for All-Weather Performance
- 55,000-Mile Limited Tread Life Warranty
- Towing Support and Stability

AVAILABLE IN
43 SIZES

RIM SIZING
15"- 20"

SPEED RATING
R / S / T



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.

PERFORMANCE RATINGS



*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|-----------------|
| CHEVROLET COLORADO | NISSAN TITAN |
| CHEVROLET SILVERADO | NISSAN TITAN XD |
| FORD F-SERIES | RAM TRUCKS |
| JEEP CHEROKEE | TOYOTA 4RUNNER |
| NISSAN FRONTIER | TOYOTA TUNDRA |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



HEAT DIFFUSER TECHNOLOGY

in the lower sidewall dissipates heat to protect the internal tire components. Keeping this critical area of the tire cool ensures vehicle stability even when towing or carrying heavy loads.



SILICA TREAD COMPOUND

delivers superior wear life and wet weather traction (non-LT sizes).



AGGRESSIVE UPPER SIDEWALL

features with offset shoulder blocks provide protection from rugged terrain and provide added off-road traction at low tire pressures or in off-camber situations.



DEEP TREAD PATTERN

provides long lasting wear as well as consistent snow and hydroplane resistance throughout the life of the tire.

LEARN MORE



RUBITREK A/T

RUBITREK A/T

VERSATILE ALL-TERRAIN TRACTION

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.O.G.
15"	28074096	235/75R15	XL	-	109T	6.0 - 8.0	6.5	28.9	9.1	732	14	35.1	2271	50	660-A-B
	28070127	30x9.50R15LT	C	6	104S	6.5 - 8.5	7.5	29.5	9.5	708	17	44.1	1985	50	-
	28070241	31x10.50R15LT	C	6	109S	7.0 - 9.0	8.5	30.5	10.4	685	18	49.8	2270	50	-
	28077702	32x11.50R15LT	C	6	113R	8.0 - 10.0	9.0	31.5	11.3	664	19	56.2	2535	50	-
	28077976	33x12.50R15LT	C	6	108R	8.5 - 11.0	10.0	32.5	12.5	645	19	57.3	2205	35	-
	28077307	35x12.50R15LT	C	6	113R	8.5 - 11.0	10.0	34.5	12.5	608	19	68.3	2535	35	-
16"	28074040	235/70R16	XL	-	109T	6.0 - 8.0	7.0	29.0	9.4	729	13	36.8	2271	50	660-A-B
	28074264	P245/75R16	XL	-	112T	6.5 - 8.0	7.0	30.5	9.8	694	13	38.6	2469	50	660-A-B
	28074771	255/70R16	XL	-	115T	6.5 - 8.5	7.5	30.1	10.2	703	13	39.0	2679	50	660-A-B
	28074121	265/70R16	SL	-	112T	7.0 - 9.0	8.0	30.6	10.8	692	14	42.3	2469	51	660-A-B
	28074558	265/75R16	SL	-	116T	7.0 - 9.0	7.5	31.7	10.6	671	14	43.7	2756	51	660-A-B
	28070511	LT225/75R16	E	10	115/112S	6.0 - 7.0	6.0	29.3	8.5	711	17	40.3	2680 / 2470	80	-
	28070986	LT235/85R16	E	10	120/116S	6.0 - 7.5	6.5	31.7	9.1	658	17	47.8	3042 / 2778	80	-
	28070756	LT245/75R16	E	10	120/116S	6.5 - 8.0	7.0	30.5	9.5	684	17	49.4	3042 / 2778	80	-
	28070353	LT265/75R16	E	10	123/120S	7.0 - 8.0	7.5	31.7	10.4	660	18	55.3	3415 / 3085	80	-
	28077374	LT285/75R16	E	10	126/123R	7.5 - 9.0	8.0	32.8	11.1	637	18	59.7	3750 / 3415	80	-
	28077564	LT305/70R16	E	10	124/121R	8.0 - 9.5	9.0	32.8	12.1	637	19	64.4	3525 / 3195	65	-
	28077988	LT315/75R16	E	10	127/124R	8.0 - 11.0	8.5	34.6	12.3	606	19	74.1	3860 / 3525	65	-
17"	28074089	235/75R17	SL	-	109T	6.0 - 8.0	6.5	31.1	9.1	679	14	37.9	2271	51	660-A-B
	28074166	245/65R17	SL	-	111T	7.0 - 8.5	7.0	29.5	9.7	719	13	39.0	2403	50	660-A-B
	28074677	245/70R17	XL	-	114T	6.5 - 8.0	7.0	30.6	9.8	691	13	39.9	2601	50	660-A-B
	28074891	255/70R17	SL	-	112T	6.5 - 8.5	7.5	31.1	10.2	679	13	42.8	2469	51	660-A-B
	28074776	265/65R17	XL	-	116T	7.5 - 9.5	8.0	30.6	10.6	697	13	42.1	2756	50	660-A-B
	28074576	265/70R17	SL	-	115T	7.0 - 9.0	8.0	31.7	10.8	668	14	46.5	2679	51	660-A-B
	28074640	P285/70R17	SL	-	117T	7.5 - 9.5	8.5	32.8	11.3	647	14	51.4	2833	51	660-A-B
	28077546	LT235/80R17	E	10	120/117R	6.0 - 7.5	6.5	31.8	9.1	655	17	48.5	3085 / 2835	80	-
	28070776	LT245/75R17	E	10	121/118S	6.5 - 7.5	7.0	31.7	9.5	657	17	51.4	3195 / 2910	80	-
	28070339	LT265/70R17	E	10	121/118S	7.0 - 8.5	8.0	31.9	10.7	653	18	52.9	3195 / 2910	80	-
28070394	LT285/70R17	E	10	121/118S	7.5 - 9.0	8.5	33.0	11.6	632	18	58.9	3195 / 2910	80	-	
28070963	LT315/70R17	E	10	121/118S	8.0 - 11.0	9.5	34.6	12.7	604	19	72.8	3195 / 2910	65	-	

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes.

Wheel Dia.	Item Number	Tire Size	Load ID	Ply Rating	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.O.G.
18"	28074284	255/70R18	SL	-	113T	6.5 - 8.5	7.5	32.1	10.2	658	13	44.8	2535	51	660-A-B
	28074805	265/60R18	XL	-	114T	7.5 - 9.5	8.0	30.6	10.5	694	13	43.2	2601	50	660-A-B
	28074033	265/65R18	SL	-	114T	7.5 - 9.5	8.0	31.5	10.6	675	13	46.1	2601	51	660-A-B
	28074757	265/70R18	SL	-	116T	7.0 - 9.0	8.0	32.6	10.8	646	14	46.7	2756	51	660-A-B
	28074460	275/65R18	SL	-	116T	7.5 - 9.5	8.0	32.1	10.9	663	14	47.4	2756	51	660-A-B
	28070568	LT275/65R18	E	10	123/120S	7.5 - 9.0	8.0	32.1	10.7	651	18	60.2	3415 / 3085	80	-
28070381	LT275/70R18	E	10	125/122S	7.0 - 9.0	8.0	33.4	11.0	624	18	60.8	3640 / 3305	80	-	
20"	28074522	275/55R20	XL	-	117T	7.5 - 9.5	8.5	31.9	11.1	661	13	48.1	2833	50	660-A-B
	28074060	275/60R20	SL	-	115T	7.5 - 9.5	8.0	33.1	10.8	640	13	45.9	2679	51	660-A-B
	28070792	LT275/65R20	E	10	126/123S	7.5 - 9.5	8.0	34.1	10.6	611	18	66.1	3750 / 3415	80	-
	28074045	LT285/55R20	E	10	122/119T	8.0 - 10.0	9.0	32.4	11.2	642	18	58.2	3305 / 3000	80	-
	28070202	LT305/55R20	E	10	121/118S	8.5 - 11.0	9.5	33.2	12.3	626	19	71.0	3195 / 2910	65	-
	28077262	35x12.50R20LT	E	10	121R	8.5 - 11.0	10.0	34.6	12.5	603	19	76.1	3195	65	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment. No UTQG rating for LT sizes.





PASSENGER CAR

AZENIS RT660+

PEAK PERFORMANCE REFINED BY ENTHUSIASTS



- 200 Treadwear Extreme Performance Summer Tire
- Uncompromised Performance for Street and Track
- Design Enhancements for Superior Handling and Response
- Prolonged Wear Life
- Expanded Fitment Coverage with New 20-Inch Sizes

AVAILABLE IN
40 SIZES

RIM SIZING
14"- 20"

SPEED RATING
H / W



PERFORMANCE RATINGS

DRY GRIP



RIDE COMFORT



WET GRIP



QUIET RIDE



TREAD LIFE



FUEL EFFICIENCY



*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-----------------------|------------------------|
| BMW M3 | MAZDA MX-5 MIATA |
| CHEVROLET CAMARO SS | NISSAN Z |
| DODGE CHARGER HELLCAT | PORSCHE 718 CAYMAN GT4 |
| FORD MUSTANG GT350R | PORSCHE 911 GT3 |
| HONDA S2000 | SUBARU BRZ |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



MOTORSPORTS-INSPIRED TREAD COMPOUND

delivers unrivaled traction both on and off the track with 8/32" tread depth for longer tread life.



COMPETITION-PROVEN CONSTRUCTION

with a lighter weight design provides superior handling and response.



LARGER CONTACT PATCH

generates increased cornering power, improved handling and better heat management.



OPTIMIZED TIRE PROFILE

maximizes the contact patch for confidence-inspiring grip and enhanced connection with the road.

AZENIS RT660+



LEARN MORE



AZENIS RT660+

PEAK PERFORMANCE REFINED BY ENTHUSIASTS

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
14"	28681405	195/60R14	SL	86H	5.5 - 7.0	6.0	23.3	7.9	908	8	18.3	1168	51	200-A-A
	28683219	205/50ZR15	XL	89W	5.5 - 7.5	6.5	23.1	8.4	910	8	20.3	1279	50	200-A-A
15"	28683983	225/45ZR15	SL	87W	7.0 - 8.5	7.5	23.0	9.0	911	8	22.0	1201	51	200-A-A
	28683885	245/40ZR15	SL	88W	8.0 - 9.5	8.5	22.8	10.0	918	8	25.1	1235	51	200-A-A
16"	28683700	205/40ZR16	XL	83W	7.0 - 8.0	7.5	22.5	8.4	922	8	18.7	1074	50	200-A-A
	28683604	215/45ZR16	SL	86W	7.0 - 8.0	7.0	23.6	8.5	881	8	21.6	1168	51	200-A-A
	28683706	225/50ZR16	SL	92W	6.0 - 8.0	7.0	24.9	9.2	846	8	24.5	1389	51	200-A-A
17"	28683370	205/40ZR17	XL	84W	7.0 - 8.0	7.5	23.5	8.4	881	8	20.7	1102	50	200-A-A
	28683413	215/40ZR17	XL	87W	7.0 - 8.5	7.5	23.8	8.7	870	8	21.8	1201	50	200-A-A
	28683800	215/45ZR17	XL	91W	7.0 - 8.0	7.0	24.6	8.5	844	8	22.9	1356	50	200-A-A
	28683341	225/45ZR17	XL	94W	7.0 - 8.5	7.5	25.0	9.0	833	8	24.0	1477	50	200-A-A
	28683750	235/40ZR17	SL	90W	8.0 - 9.5	8.5	24.4	9.6	850	8	24.0	1323	51	200-A-A
	28683566	235/45ZR17	SL	94W	7.5 - 9.0	8.0	25.4	9.4	821	8	24.5	1477	51	200-A-A
	28683602	245/40ZR17	XL	95W	8.0 - 9.5	8.5	24.8	10.0	840	8	24.7	1521	50	200-A-A
	28683257	245/45ZR17	XL	99W	7.5 - 9.0	8.0	25.7	9.7	812	8	26.5	1709	50	200-A-A
	28683919	255/40ZR17	XL	98W	8.5 - 10.0	9.0	25.1	10.4	830	8	26.2	1653	50	200-A-A
	28683682	275/40ZR17	SL	98W	9.0 - 11.0	9.5	25.7	11.1	812	8	28.0	1653	51	200-A-A
18"	28683850	225/40ZR18	XL	92W	7.5 - 9.0	8.0	25.1	9.2	827	8	23.6	1389	50	200-A-A
	28683464	235/40ZR18	XL	95W	8.0 - 9.5	8.5	25.4	9.6	817	8	25.4	1521	50	200-A-A
	28683952	245/40ZR18	XL	97W	8.0 - 9.5	8.5	25.8	10.0	806	8	26.5	1609	50	200-A-A
	28683313	255/35ZR18	XL	94W	8.5 - 10.0	9.0	25.0	10.4	830	8	25.8	1477	50	200-A-A
	28683874	255/40ZR18	XL	99W	8.5 - 10.0	9.0	26.1	10.4	799	8	26.9	1709	50	200-A-A
	28683778	265/35ZR18	XL	97W	9.0 - 10.5	9.5	25.4	10.9	820	8	28.0	1609	50	200-A-A
	28683640	275/35ZR18	SL	95W	9.0 - 11.0	9.5	25.6	11.2	811	8	27.3	1521	51	200-A-A
	28683517	285/30ZR18	SL	93W	9.5 - 10.5	10.0	24.8	11.6	837	8	27.1	1433	51	200-A-A
	28683997	295/30ZR18	XL	98W	10.0 - 11.0	10.5	25.1	12.1	827	8	29.1	1653	50	200-A-A
	28683665	295/40ZR18	SL	103W	10.0 - 11.5	10.5	27.4	12.0	763	8	36.4	1929	51	200-A-A
28683704	315/30ZR18	SL	98W	10.5 - 11.5	11.0	25.5	12.8	815	8	30.2	1653	51	200-A-A	

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
19"	28683903	245/35ZR19	XL	93W	8.0 - 9.5	8.5	25.8	10.0	802	8	25.6	1433	50	200-A-A
	28683554	265/35ZR19	XL	98W	9.0 - 10.5	9.5	26.4	10.9	788	8	28.2	1653	50	200-A-A
	28683905	275/30ZR19	XL	96W	9.0 - 10.0	9.5	25.6	11.1	808	8	27.6	1565	50	200-A-A
	28683804	275/35ZR19	XL	100W	9.0 - 11.0	9.5	26.6	11.2	779	8	29.1	1764	50	200-A-A
	28683645	295/35ZR19	SL	100W	10.0 - 11.5	10.5	27.2	12.0	765	8	31.5	1764	51	200-A-A
	28683463	305/30ZR19	XL	102W	10.5 - 11.5	11.0	26.3	12.5	791	8	31.1	1874	50	200-A-A
	28683858	315/30ZR19	SL	100W	10.5 - 11.5	11.0	26.5	12.8	782	8	32.4	1764	51	200-A-A
20"	28683580	245/35ZR20	XL	95W	8.0 - 9.5	9.0	26.8	10.0	774	8	27.6	1521	50	200-A-A
	28683784	285/35ZR20	XL	104W	9.5 - 11.0	10.0	27.9	11.0	744	8	32.4	1984	50	200-A-A
	28683324	295/30ZR20	XL	101W	10.0 - 11.0	10.5	27.0	12.0	766	8	32.4	1819	50	200-A-A
	28683107	305/30ZR20	XL	103W	10.5 - 11.5	11.0	27.2	12.5	760	8	32.6	1929	50	200-A-A
	28683187	305/35ZR20	XL	107W	10.0 - 12.0	11.0	28.5	12.0	729	8	34.6	2149	50	200-A-A





PASSENGER CAR

AZENIS RT615K+

COMPETITION-PROVEN PERFORMANCE FOR ENTHUSIASTS



- Enthusiast's Choice for Competition-Proven Performance
- DOT-Approved 200 Treadwear UHP Tire
- Extended Tread Life for the Street
- Confidence-Inspiring Handling and Stability
- Superb Cornering Response

AVAILABLE IN
17 SIZES

RIM SIZING
14"- 18"

SPEED RATING
H / W



PERFORMANCE RATINGS



*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-----------------|-------------|
| ACURA INTEGRA | MAZDA MIATA |
| AUDI TT QUATTRO | NISSAN 370Z |
| BMW M3 | PORSCHE 911 |
| BMW Z4 | SCION FR-S |
| HONDA S2000 | SUBARU BRZ |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



HIGH-TENSION CARCASS
increases handling response and high-speed stability.



RACE-INSPIRED TREAD COMPOUND
provides excellent traction from the track to the street.



MASSIVE SPORT SIDE SHOULDER BLOCKS
deliver motorsports-level grip and exceptional cornering response.



ASYMMETRIC TREAD DESIGN
and digitally-engineered compound provide track-capable performance that lasts on the street.

AZENIS RT615K+



LEARN MORE



AZENIS RT615K+

COMPETITION-PROVEN PERFORMANCE FOR ENTHUSIASTS

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
14"	28533443	195/60R14	SL	86H	5.5 - 7.0	6.0	23.2	7.9	900	8	18.5	1168	51	200-A-A
	28533077	205/50R15	XL	89W	5.5 - 7.5	6.5	23.2	8.2	895	8	21.2	1279	50	200-A-A
16"	28533766	215/45R16	SL	86W	7.0 - 8.0	7.0	23.6	8.7	768	8	21.6	1168	51	200-A-A
	28538495	225/50R16	SL	92W	6.0 - 8.0	7.0	24.9	9.1	881	8	24.6	1389	51	200-A-A
17"	28532497	215/40R17	XL	87W	7.0 - 8.5	7.5	23.9	8.7	861	8	20.4	1202	50	200-A-A
	28531437	215/45R17	SL	87W	7.0 - 8.0	7.0	24.6	8.3	871	8	22.9	1201	51	200-A-A
	28537258	225/45R17	XL	94W	7.0 - 8.5	7.5	25.0	8.9	822	8	24.9	1477	50	200-A-A
	28534124	245/45R17	XL	99W	7.5 - 9.0	8.0	25.6	9.6	806	8	27.1	1709	50	200-A-A
	28538003	255/40R17	SL	94W	8.5 - 10.0	9.0	25.0	10.3	825	8	26.5	1477	51	200-A-A
	28535983	275/40R17	SL	98W	9.0 - 11.0	9.5	25.6	10.8	806	8	28.3	1653	51	200-A-A

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
18"	28539564	225/40R18	XL	92W	7.5 - 9.0	8.0	25.1	9.3	818	8	24.0	1389	50	200-A-A
	28537681	235/40R18	XL	95W	8.0 - 9.5	8.5	25.5	9.6	806	8	24.3	1521	50	200-A-A
	28533881	245/40R18	XL	97W	8.0 - 9.5	8.5	25.6	9.8	803	8	26.5	1609	50	200-A-A
	28538247	265/35R18	XL	97W	9.0 - 10.5	9.5	25.4	10.7	852	8	28.2	1609	50	200-A-A
	28537737	275/35R18	SL	95W	9.0 - 11.0	9.5	25.6	10.8	803	8	26.9	1521	51	200-A-A
	28535059	295/40R18	SL	103W	10.0 - 11.5	10.5	27.2	11.8	763	8	32.8	1929	51	200-A-A
	28533615	315/30R18	SL	98W	10.5 - 11.5	11.0	25.5	12.6	813	8	31.9	1653	51	200-A-A



AZENIS FK510

SUMMER ULTRA HIGH PERFORMANCE



- Confidence-Inspiring Stability
- Excellent Wet Weather Traction
- Enhanced High-Speed Cornering
- Precise Handling at High Speeds
- Wide Range of Sizes for Performance Vehicles

AVAILABLE IN
81 SIZES

RIM SIZING
17"- 22"

SPEED RATING
W / Y / (Y)



*The FK510 SUV is designed to offer today's highly-capable luxury sport SUVs and CUVs the performance they demand.



PERFORMANCE RATINGS



*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|------------------|---------------|
| AUDI S4 | FORD MUSTANG |
| BMW M3 | HONDA S2000 |
| BMW X5 | MAZDA RX-8 |
| CHEVROLET CAMARO | PORSCHE MACAN |
| DODGE CHARGER | SUBARU BRZ |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



TIRE HIGHLIGHTS

- HYBRID UNDERTREAD CAP PLY**
provides added rigidity and high-speed stability through the use of both aramid and nylon materials.
- OPTIMIZED VOID RATIO**
and variable sipe depth allow for controlled flexibility while maintaining overall block rigidity, improving both directional stability and vehicle-stopping distances.
- 4D NANO DESIGN TECHNOLOGY**
allows the compound to adapt to dry and wet driving conditions, while four circumferential grooves effectively disperse water to resist hydroplaning.
- WIDE SHOULDER BLOCKS**
enhance high-speed cornering and lateral grip.

AZENIS FK510



AZENIS FK510

SUMMER ULTRA HIGH PERFORMANCE

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
17"	28032372	215/45ZR17	XL	91Y	7.0 - 8.0	7.0	24.7	8.5	842	10	20.5	1356	50	300-AA-A
	28039592	225/45ZR17	XL	94Y	7.0 - 8.5	7.5	25.0	8.9	834	10	20.7	1477	50	300-AA-A
	28036088	235/45ZR17	XL	97Y	7.5 - 9.0	8.0	25.4	9.4	821	10	22.0	1609	50	300-AA-A
	28032997	245/40ZR17	XL	95Y	8.0 - 9.5	8.5	24.8	9.9	840	10	22.9	1521	50	300-AA-A
	28038218	245/45ZR17	XL	99Y	7.5 - 9.0	8.0	25.7	9.7	813	10	22.5	1709	50	300-AA-A
	28031037	255/40ZR17	SL	94W	8.5 - 10.0	9.0	25.1	10.4	832	10	24.9	1477	51	300-AA-A
	28035394	275/40ZR17	SL	98W	9.0 - 11.0	9.5	25.7	11.1	813	10	26.7	1653	51	300-AA-A
18"	28033160	225/40ZR18	XL	(92Y)	7.5 - 9.0	8.0	25.2	9.1	826	10	22.3	1389	50	300-AA-A
	28032674	225/45ZR18	XL	(95Y)	7.0 - 8.5	7.5	26.0	8.9	800	10	21.6	1521	50	300-AA-A
	28039762	235/40ZR18	XL	(95Y)	8.0 - 9.5	8.5	25.5	9.6	818	10	23.6	1521	50	300-AA-A
	28031525	245/35ZR18	XL	92Y	8.0 - 9.5	8.5	24.8	9.9	837	10	22.3	1389	50	300-AA-A
	28034669	245/40ZR18	XL	97Y	8.0 - 9.5	8.5	25.8	9.9	808	10	24.7	1609	50	300-AA-A
	28036955	245/45ZR18	XL	(100Y)	7.5 - 9.0	8.0	26.7	9.7	783	10	24.0	1764	50	300-AA-A
	28036278	255/35ZR18	XL	(94Y)	8.5 - 10.0	9.0	25.1	10.4	829	10	23.8	1477	50	300-AA-A
	28038585	255/40ZR18	XL	(99Y)	8.5 - 10.0	9.0	26.1	10.4	798	10	25.4	1709	50	300-AA-A
	28033786	255/45ZR18	XL	103Y	8.0 - 9.5	8.5	27.2	10.2	771	10	26.9	1929	50	300-AA-A
	28039629	265/35ZR18	XL	(97Y)	9.0 - 10.5	9.5	25.4	10.8	818	10	25.4	1609	50	300-AA-A
	28038773	275/35ZR18	XL	(99Y)	9.0 - 11.0	9.5	25.6	11.1	813	10	26.2	1709	50	300-AA-A
	28031904	275/40ZR18	SL	99Y	9.0 - 11.0	9.5	26.7	11.1	781	10	27.6	1709	51	300-AA-A
	28035808	285/35ZR18	XL	(101Y)	9.5 - 11.0	10.0	25.9	11.6	803	9	26.6	1819	50	300-AA-A
	28035523	295/30ZR18	XL	(98Y)	10.0 - 11.0	10.5	25.1	12.0	829	9	25.7	1653	50	300-AA-A
19"	28036400	225/35ZR19	XL	(88Y)	7.5 - 9.0	8.0	25.2	9.1	818	10	22.0	1235	50	300-AA-A
	28035717	225/40ZR19	XL	(93Y)	7.5 - 9.0	8.0	26.2	9.1	793	10	22.7	1433	50	300-AA-A
	28037512	225/45ZR19	XL	96Y	7.0 - 8.5	7.5	27.0	8.9	769	10	24.0	1565	50	300-AA-A
	28032322	235/35ZR19	XL	(91Y)	8.0 - 9.5	8.5	25.5	9.6	813	10	23.4	1356	50	300-AA-A
	28037499	245/35ZR19	XL	(93Y)	8.0 - 9.5	8.5	25.8	9.9	803	10	24.3	1433	50	300-AA-A
	28031800	245/40ZR19	XL	(98Y)	8.0 - 9.5	8.5	26.8	9.9	774	10	25.4	1653	50	300-AA-A
	28034353	245/45ZR19	XL	(102Y)	7.5 - 9.0	8.0	27.8	9.7	751	10	26.9	1874	50	300-AA-A
	28037384	255/30ZR19	XL	(91Y)	8.5 - 9.5	9.0	25.1	10.4	821	10	23.8	1356	50	300-AA-A
	28035585	255/35ZR19	XL	(96Y)	8.5 - 10.0	9.0	26.1	10.4	795	10	25.6	1565	50	300-AA-A
	28039325	255/40ZR19	XL	(100Y)	8.5 - 10.0	9.0	27.1	10.4	767	10	27.1	1764	50	300-AA-A
	28035976	265/30ZR19	XL	(93Y)	9.0 - 10.0	9.5	25.3	10.8	816	9	24.7	1433	50	300-AA-A
	28035938	265/35ZR19	XL	(98Y)	9.0 - 10.5	9.5	26.4	10.8	786	10	26.8	1653	50	300-AA-A
	28036502	275/30ZR19	XL	(96Y)	9.0 - 10.0	9.5	25.6	11.1	808	9	25.8	1565	50	300-AA-A
	28034137	275/35ZR19	XL	(100Y)	9.0 - 11.0	9.5	26.7	11.1	781	10	28.4	1764	50	300-AA-A
	28038888	275/40ZR19	XL	(105Y)	9.0 - 11.0	9.5	27.8	11.1	751	10	28.4	2039	50	300-AA-A
	28035939	285/30ZR19	XL	(98Y)	9.5 - 10.5	10.0	25.8	11.6	803	9	27.1	1653	50	300-AA-A
	28032808	285/35ZR19	XL	(103Y)	9.5 - 11.0	10.0	27.0	11.6	771	9	29.1	1929	50	300-AA-A
28033927	295/30ZR19	XL	100Y	10.0 - 11.0	10.5	26.1	12.0	795	9	28.2	1764	50	300-AA-A	
28035941	305/30ZR19	XL	(102Y)	10.5 - 11.5	11.0	26.3	12.6	788	9	28.0	1874	50	300-AA-A	

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
20"	28035022	225/35ZR20	XL	(90Y)	7.5 - 9.0	8.0	26.2	9.1	788	10	22.7	1323	50	300-AA-A
	28035007	235/30ZR20	XL	(88Y)	8.5 - 8.5	8.5	25.6	9.6	805	10	22.4	1235	50	300-AA-A
	28035524	235/35ZR20	XL	(92Y)	8.0 - 9.5	8.5	26.5	9.6	783	10	24.0	1389	50	300-AA-A
	28039609	245/30ZR20	XL	(90Y)	8.0 - 9.0	8.5	25.8	9.9	800	10	24.3	1323	50	300-AA-A
	28033244	245/35ZR20	XL	(95Y)	8.0 - 9.5	8.5	26.8	9.9	774	10	25.4	1521	50	300-AA-A
	28031318	245/40ZR20	XL	(99Y)	8.0 - 9.5	8.5	27.8	9.9	747	10	26.5	1709	50	300-AA-A
	28039274	245/45ZR20	XL	103Y	7.5 - 9.0	8.0	28.7	9.7	725	10	28.0	1929	50	300-AA-A
	28034117	255/30ZR20	XL	(92Y)	8.5 - 9.5	9.0	26.1	10.4	790	10	25.1	1389	50	300-AA-A
	28036744	255/35ZR20	XL	(97Y)	8.5 - 10.0	9.0	27.1	10.4	767	10	26.9	1609	50	300-AA-A
	28036572	255/40ZR20	XL	(101Y)	8.5 - 10.0	9.0	28.1	10.4	740	10	28.2	1819	50	300-AA-A
	28039729	255/45ZR20	XL	105Y	8.0 - 9.5	8.5	29.2	10.2	715	10	29.3	2039	50	300-AA-A
	28035525	265/30ZR20	XL	(94Y)	9.0 - 10.0	9.5	26.3	10.8	786	9	25.5	1477	50	300-AA-A
	28035531	265/35ZR20	XL	(99Y)	9.0 - 10.5	9.5	27.4	10.8	758	10	27.5	1709	50	300-AA-A
	28038246	265/40ZR20	XL	104Y	9.0 - 10.5	9.5	28.4	10.8	732	10	29.5	1984	50	300-AA-A
	28032956	275/30ZR20	XL	(97Y)	9.0 - 10.0	9.5	26.5	11.1	778	9	27.1	1609	50	300-AA-A
	28036351	275/35ZR20	XL	(102Y)	9.0 - 11.0	9.5	27.6	11.1	753	10	29.1	1874	50	300-AA-A
	28036319	275/40ZR20	XL	106Y	9.0 - 11.0	9.5	28.7	11.1	725	10	30.4	2094	50	300-AA-A
	28038200	285/30ZR20	XL	(99Y)	9.5 - 10.5	10.0	26.8	11.6	774	9	28.0	1709	50	300-AA-A
	28032622	285/35ZR20	XL	(104Y)	9.5 - 11.0	10.0	28.0	11.6	745	9	29.8	1984	50	300-AA-A
	28035970	295/25ZR20	XL	(95Y)	10.0 - 11.0	10.5	25.8	12.0	804	9	27.1	1521	50	300-AA-A
28031522	295/30ZR20	XL	(101Y)	10.0 - 11.0	10.5	27.1	12.0	767	9	29.3	1819	50	300-AA-A	
28035323	295/35ZR20	XL	(105Y)	10.0 - 11.5	10.5	28.2	12.0	740	9	30.2	2039	50	300-AA-A	
28036987	315/35ZR20	XL	110Y	10.5 - 12.5	11.0	28.7	12.8	725	9	34.6	2337	50	300-AA-A	
21"	28039049	245/35ZR21	XL	(96Y)	8.0 - 9.5	8.5	27.8	9.9	745	10	26.0	1565	50	300-AA-A
	28035103	255/30ZR21	XL	(93Y)	8.5 - 9.5	9.0	27.0	10.4	760	10	26.8	1433	50	300-AA-A
	28032384	265/35ZR21	XL	(101Y)	9.0 - 10.5	9.5	28.4	10.8	730	10	29.3	1819	50	300-AA-A
	28035325	295/30ZR21	XL	(102Y)	10.0 - 11.0	10.5	28.1	12.0	738	9	31.0	1874	50	300-AA-A
22"	28032077	295/25ZR22	XL	97Y	10.0 - 11.0	10.5	27.8	12.0	740	9	30.8	1609	50	300-AA-A
AZENIS FK510 SUV / CUV SIZES														
18"	28063845	255/55R18	XL	109W	7.0 - 9.0	8.0	29.3	10.6	727	10	33.3	2271	50	300-AA-A
19"	28065970	235/55R19	XL	105Y	6.5 - 8.5	7.5	29.3	9.8	721	10	31.1	2039	50	300-AA-A
	28065949	255/50R19	XL	107Y	7.0 - 9.0	8.0	29.3	10.6	723	10	30.2	2149	50	300-AA-A
	28065987	265/50R19	XL	110Y	7.5 - 9.5	8.5	29.6	11.1	713	10	30.0	2337	50	300-AA-A
20"	28065013	255/45ZR20	XL	105Y	8.0 - 9.5	8.5	29.2	10.2	717	10	28.4	2039	50	300-AA-A
	28065587	265/45R20	XL	108Y	8.5 - 10.0	9.0	29.5	10.6	709	10	30.0	2205	50	300-AA-A
	28065947	275/40R20	XL	106Y	9.0 - 11.0	9.5	28.7	11.1	725	10	30.0	2094	50	300-AA-A
	28063016	275/45R20	XL	110W	8.5 - 10.5	9.0	29.9	10.9	702	10	33.1	2337	50	300-AA-A
	28063777	275/50R20	XL	113Y	7.5 - 9.5	8.5	31.1	11.3	681	10	35.9	2535	50	300-AA-A
	28065242	295/40R20	XL	110Y	10.0 - 11.5	10.5	29.4	12.0	709	9	32.8	2337	50	300-AA-A
	28065948	315/35R20	XL	110Y	10.5 - 12.5	11.0	28.7	12.8	725	9	34.2	2337	50	300-AA-A
21"	28065981	265/40R21	XL	105Y	9.0 - 10.5	9.5	29.4	10.8	705	10	31.5	2039	50	300-AA-A
	28065232	295/35R21	XL	107Y	10.0 - 11.5	10.5	29.2	12.0	713	9	33.1	2149	50	300-AA-A



AZENIS **EK** 460 A/S

ULTRA HIGH PERFORMANCE FOR EVERY SEASON



- Ultra High Performance in Any Weather Condition
- Long-Lasting Wet Traction
- Confidence in Light Snow
- High-Performance Dry Handling
- 50,000-Mile Limited Tread Life Warranty


AVAILABLE IN
85 SIZES

RIM SIZING
17"- 22"

SPEED RATING
Y



PERFORMANCE RATINGS

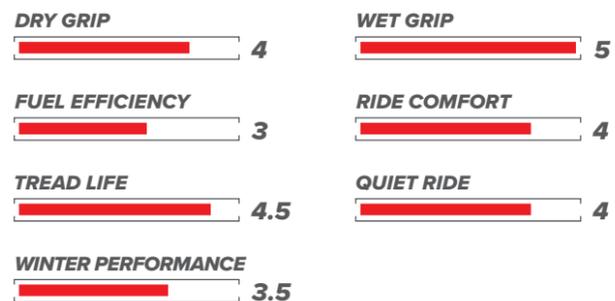

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|---------------|
| BMW M4 | MERCEDES BENZ |
| CHEVROLET CAMARO SS | AMG GLC63 |
| DODGE CHALLENGER | PORSCHE |
| SRT HELLCAT | MACAN GTS |
| FORD MUSTANG GT | SUBARU BRZ |
| JEEP GRAND | TESLA MODEL 3 |
| CHEROKEE SRT | TESLA MODEL Y |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



PASSENGER CAR



SUV | CUV



TIRE HIGHLIGHTS



ADVANCED 4D NANO TECHNOLOGY
was used to develop a rubber compound that delivers high-performance grip and wet weather traction without sacrificing tread life.



EMERGING GROOVES
expand to provide wet weather performance throughout the life of the tire while also reducing air channeling noise.



INTERLOCKING SIPES
improve snow traction while maintaining tire rigidity to deliver both dry and wet performance.



HIGH GRIP CHAMFER
delivers improved dry handling capability.

AZENIS **EK 460 A/S**

LEARN MORE



AZENIS FK460 A/S

ULTRA HIGH PERFORMANCE FOR EVERY SEASON

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
17"	28105770	205/50ZR17	XL	93Y	5.5 - 7.5	6.5	25.1	8.4	836	10	22.7	1433	50	500-A-A
	28105792	215/45ZR17	XL	91Y	7.0 - 8.0	7.0	24.6	8.4	844	10	21.6	1356	50	500-A-A
	28105771	215/50ZR17	XL	95Y	6.0 - 7.5	7.0	25.5	8.9	824	10	22.7	1521	50	500-A-A
	28105727	215/55ZR17	XL	98Y	6.0 - 7.5	7.0	26.3	8.9	800	10	24.9	1653	50	500-A-A
	28105795	225/45ZR17	XL	94Y	7.0 - 8.5	7.5	25.0	8.9	834	10	22.9	1477	50	500-A-A
	28105772	225/50ZR17	XL	98Y	6.0 - 8.0	7.0	25.9	9.2	812	10	24.0	1653	50	500-A-A
	28105762	225/55ZR17	SL	97Y	6.0 - 8.0	7.0	26.8	9.2	788	10	25.1	1609	51	500-A-A
	28105794	235/45ZR17	XL	97Y	7.5 - 9.0	8.0	25.4	9.3	821	10	24.0	1609	50	500-A-A
	28105773	235/50ZR17	XL	100Y	6.5 - 8.5	7.5	26.3	9.6	800	10	25.8	1764	50	500-A-A
	28105725	235/55ZR17	XL	103Y	6.5 - 8.5	7.5	27.2	9.6	777	10	27.1	1929	50	500-A-A
	28105785	245/40ZR17	XL	95Y	8.0 - 9.5	8.5	24.7	9.8	843	10	23.8	1521	50	500-A-A
	28105784	245/45ZR17	XL	99Y	7.5 - 9.0	8.0	25.7	9.6	812	10	24.9	1709	50	500-A-A
	28105136	255/40ZR17	XL	98Y	8.5 - 10.0	9.0	25.0	10.2	832	10	25.8	1653	50	500-A-A
	28105275	275/40ZR17	SL	98Y	9.0 - 11.0	9.5	25.7	10.9	812	10	28.7	1653	51	500-A-A
18"	28105899	215/45ZR18	XL	93Y	7.0 - 8.0	7.0	25.6	8.4	811	10	23.4	1433	50	500-A-A
	28105892	225/40ZR18	XL	92Y	7.5 - 9.0	8.0	25.1	9.1	827	10	22.7	1389	50	500-A-A
	28105824	225/45ZR18	XL	95Y	7.0 - 8.5	7.5	25.9	8.9	802	10	24.0	1521	50	500-A-A
	28105805	225/50ZR18	SL	95Y	6.0 - 8.0	7.0	26.9	9.2	782	10	25.8	1521	51	500-A-A
	28105893	235/40ZR18	XL	95Y	8.0 - 9.5	8.5	25.4	9.5	818	10	23.8	1521	50	500-A-A
	28105895	235/45ZR18	XL	98Y	7.5 - 9.0	8.0	26.3	9.3	791	10	25.6	1653	50	500-A-A
	28105825	235/50ZR18	XL	101Y	6.5 - 8.5	7.5	27.3	9.6	771	10	28.7	1819	50	500-A-A
	28105834	245/35ZR18	XL	92Y	8.0 - 9.5	8.5	24.9	9.8	837	10	24.3	1389	50	500-A-A
	28105894	245/40ZR18	XL	97Y	8.0 - 9.5	8.5	25.7	9.8	809	10	26.9	1609	50	500-A-A
	28105865	245/45ZR18	XL	100Y	7.5 - 9.0	8.0	26.7	9.6	782	10	26.9	1764	50	500-A-A
	28105896	255/35ZR18	XL	94Y	8.5 - 10.0	9.0	25.1	10.2	827	10	25.6	1477	50	500-A-A
	28105844	255/40ZR18	XL	99Y	8.5 - 10.0	9.0	26.0	10.2	800	10	27.8	1709	50	500-A-A
	28105756	255/55ZR18	XL	109Y	7.0 - 9.0	8.0	29.0	10.4	727	10	31.7	2271	50	500-A-A
	28105806	265/35ZR18	XL	97Y	9.0 - 10.5	9.5	25.4	10.7	817	10	27.3	1609	50	500-A-A
	28105640	265/40ZR18	XL	101Y	9.0 - 10.5	9.5	26.3	10.7	788	10	28.0	1819	50	500-A-A
	28105807	275/35ZR18	XL	99Y	9.0 - 11.0	9.5	25.7	10.9	811	10	28.4	1709	50	500-A-A
	28105687	275/40ZR18	SL	99Y	9.0 - 11.0	9.5	26.7	10.9	781	10	30.0	1709	51	500-A-A
	28105427	285/35ZR18	XL	101Y	9.5 - 11.0	10.0	26.0	11.4	803	10	30.4	1819	50	500-A-A
19"	28105384	225/35ZR19	XL	88Y	7.5 - 9.0	8.0	25.4	9.1	818	10	22.7	1235	50	500-A-A
	28105971	225/40ZR19	XL	93Y	7.5 - 9.0	8.0	26.1	9.1	794	10	23.6	1433	50	500-A-A
	28105937	225/45ZR19	XL	96Y	7.0 - 8.5	7.5	27.0	8.9	771	10	25.1	1565	50	500-A-A
	28105983	235/35ZR19	XL	91Y	8.0 - 9.5	8.5	25.6	9.5	808	10	24.7	1356	50	500-A-A
	28105495	235/40ZR19	XL	96Y	8.0 - 9.5	8.5	26.4	9.5	785	10	25.1	1565	50	500-A-A
	28105970	235/55ZR19	XL	105Y	6.5 - 8.5	7.5	29.2	9.6	720	10	30.4	2039	50	500-A-A
	28105984	245/35ZR19	XL	93Y	8.0 - 9.5	8.5	25.9	9.8	799	10	25.8	1433	50	500-A-A
	28105974	245/40ZR19	XL	98Y	8.0 - 9.5	8.5	26.7	9.8	777	10	26.7	1653	50	500-A-A
	28105904	245/45ZR19	XL	102Y	7.5 - 9.0	8.0	27.7	9.6	752	10	29.1	1874	50	500-A-A
	28105670	245/50ZR19	XL	105Y	7.0 - 8.5	7.5	28.7	10.0	732	10	31.1	2039	50	500-A-A
	28105643	255/30ZR19	XL	91Y	8.5 - 9.5	9.0	25.2	10.2	821	10	24.9	1356	50	500-A-A
	28105973	255/35ZR19	XL	96Y	8.5 - 10.0	9.0	26.1	10.2	793	10	26.7	1565	50	500-A-A
	28105996	255/40ZR19	XL	100Y	8.5 - 10.0	9.0	27.0	10.2	768	10	27.8	1764	50	500-A-A
	28105336	255/50ZR19	XL	107Y	7.0 - 9.0	8.0	29.1	10.4	723	10	31.1	2149	50	500-A-A
	28105302	265/30ZR19	XL	93Y	9.0 - 10.0	9.5	25.4	10.7	816	10	26.9	1433	50	500-A-A
	28105938	265/35ZR19	XL	98Y	9.0 - 10.5	9.5	26.5	10.7	785	10	28.2	1653	50	500-A-A
	28105998	275/35ZR19	XL	100Y	9.0 - 11.0	9.5	26.7	10.9	779	10	29.3	1764	50	500-A-A
	28105903	275/40ZR19	XL	105Y	9.0 - 11.0	9.5	27.7	10.9	752	10	32.0	2039	50	500-A-A
	28105939	285/30ZR19	XL	98Y	9.5 - 10.5	10.0	25.9	11.4	800	10	29.8	1653	50	500-A-A
	28105989	285/35ZR19	SL	99Y	9.5 - 11.0	10.0	27.0	11.4	768	10	31.5	1709	51	500-A-A

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
20"	28105524	235/35ZR20	XL	92Y	8.0 - 9.5	8.5	26.6	9.5	779	10	26.0	1389	50	500-A-A
	28105985	245/35ZR20	XL	95Y	8.0 - 9.5	8.5	26.9	9.8	771	10	26.0	1521	50	500-A-A
	28105002	245/40ZR20	XL	99Y	8.0 - 9.5	8.5	27.7	9.8	749	10	29.5	1709	50	500-A-A
	28105023	245/45ZR20	XL	103Y	7.5 - 9.0	8.0	28.7	9.6	725	10	29.5	1929	50	500-A-A
	28105285	245/50ZR20	XL	105Y	7.0 - 8.5	7.5	29.7	10.0	705	10	31.7	2039	50	500-A-A
	28105001	255/35ZR20	XL	97Y	8.5 - 10.0	9.0	27.1	10.2	763	10	28.2	1609	50	500-A-A
	28105270	255/40ZR20	XL	101Y	8.5 - 10.0	9.0	28.0	10.2	740	10	29.3	1819	50	500-A-A
	28105013	255/45ZR20	XL	105Y	8.0 - 9.5	8.5	29.1	10.0	717	10	31.1	2039	50	500-A-A
	28105950	255/55ZR20	XL	110Y	7.0 - 9.0	8.0	31.0	10.4	680	10	33.7	2337	50	500-A-A
	28105321	265/35ZR20	XL	99Y	9.0 - 10.5	9.5	27.4	10.7	755	10	30.0	1709	50	500-A-A
	28105320	265/45ZR20	XL	108Y	8.5 - 10.0	9.0	29.4	10.5	710	10	31.7	2205	50	500-A-A
	28105569	275/30ZR20	XL	97Y	9.0 - 10.0	9.5	26.6	10.9	777	10	29.3	1609	50	500-A-A
	28105005	275/35ZR20	XL	102Y	9.0 - 11.0	9.5	27.7	10.9	749	10	31.5	1874	50	500-A-A
	28105947	275/40ZR20	XL	106Y	9.0 - 11.0	9.5	28.7	10.9	725	10	33.1	2094	50	500-A-A
	28105016	275/45ZR20	XL	110Y	8.5 - 10.5	9.0	29.8	10.7	701	10	33.7	2337	50	500-A-A
	28105028	285/30ZR20	XL	99Y	9.5 - 10.5	10.0	26.9	11.4	771	10	30.9	1709	50	500-A-A
	28105241	285/40ZR20	XL	108Y	9.5 - 11.0	10.0	29.0	11.4	717	10	34.4	2205	50	500-A-A
	28105558	295/30ZR20	XL	101Y	10.0 - 11.0	10.5	27.1	11.9	765	10	31.7	1819	50	500-A-A
	28105776	295/40ZR20	XL	110Y	10.0 - 11.5	10.5	29.3	11.9	710	10	35.3	2337	50	500-A-A
	28105018	295/45ZR20	XL	114Y	9.5 - 11.0	10.0	30.5	11.7	685	10	37.9	2601	50	500-A-A
28105560	305/30ZR20	XL	103Y	10.5 - 11.5	11.0	27.3	12.3	758	10	34.2	1929	50	500-A-A	
28105564	305/35ZR20	XL	107Y	10.0 - 12.0	11.0	28.5	12.3	729	10	35.5	2149	50	500-A-A	
28105211	315/35ZR20	XL	110Y	10.5 - 12.5	11.0	28.8	12.6	722	10	36.8	2337	50	500-A-A	
21"	28105271	245/35ZR21	XL	96Y	8.0 - 9.5	8.5	27.9	9.8	742	10	28.4	1565	50	500-A-A
	28105606	255/35ZR21	XL	98Y	8.5 - 10.0	9.0	28.1	10.2	736	10	28.9	1653	50	500-A-A
	28105494	255/40ZR21	XL	102Y	8.5 - 10.0	9.0	29.0	10.2	715	10	31.1	1874	50	500-A-A
	28105457	265/35ZR21	XL	101Y	9.0 - 10.5	9.5	28.4	10.7	729	10	30.4	1819	50	500-A-A
	28105981	265/40ZR21	XL	105Y	9.0 - 10.5	9.5	29.3	10.7	708	10	31.5	2039	50	500-A-A
	28105460	275/35ZR21	XL	103Y	9.0 - 11.0	9.5	28.7	10.9	724	10	32.8	1929	50	500-A-A
	28105808	275/45ZR21	XL	110Y	8.5 - 10.5	9.0	30.7	10.7	677	10	36.2	2337	50	500-A-A
	28105232	295/35ZR21	XL	107Y	10.0 - 11.5	10.5	29.2	11.9	710	10	36.4	2149	50	500-A-A
22"	28105218	265/35ZR22	XL	102Y	9.0 - 10.5	8.0	29.4	10.7	703	10	32.2	1874	50	500-A-A
	28105222	285/35ZR22	XL	106Y	9.5 - 11.0	10.0	30.0	11.4	690	10	36.4	2094	50	500-A-A

LEARN MORE



AZENIS **EK460 A/S** | SILENT CORE

ELECTRIC ULTRA HIGH PERFORMANCE FOR EVERY SEASON



- Silent Core Foam Added for Exceptionally Quiet Ride
- Uncompromising Performance in Any Weather
- Long-Lasting Wet Traction
- Confidence in Light Snow
- High-Performance Dry Handling for Electric Vehicles

AVAILABLE IN
17 SIZES

RIM SIZING
18"- 22"

SPEED RATING
W / Y




PASSENGER CAR



SUV | CUV

PERFORMANCE RATINGS

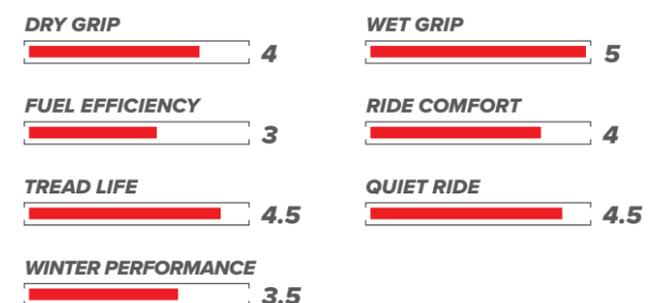

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|---------------------|---------------------------|
| AUDI E-TRON S | LUCID MOTORS AIR |
| FORD MUSTANG | MERCEDES BENZ |
| MACH-E | EQE / EQS / EQS SUV |
| GENESIS GV60 / GV70 | NISSAN ARIYA |
| HYUNDAI IONIQ 5 | POLESTAR 2 |
| KIA EV6 / SOUL EV | TESLA MODEL 3 / S / X / Y |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS

SILENT CORE FOAM insert was developed using simulation technology to optimize the placement and sizing for maximum effectiveness in reducing tire cavity noise.

ADVANCED 4D NANO TECHNOLOGY was used to develop a rubber compound that delivers high-performance grip and wet weather traction without sacrificing tread life.

EMERGING GROOVES expand to provide wet weather performance throughout the life of the tire while also reducing air channeling noise.

INTERLOCKING SIPES improve snow traction while maintaining tire rigidity to deliver both dry and wet performance.



ELECTRIC ULTRA HIGH PERFORMANCE FOR EVERY SEASON

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
18"	28103409	235/45ZR18	XL	98Y	7.5 - 9.0	8.0	26.3	9.3	791	10	27.1	1653	50	500-A-A
	28103837	235/40ZR19	XL	96Y	8.0 - 9.5	8.5	26.4	9.5	785	10	26.2	1565	50	500-A-A
19"	28103113	235/55ZR19	XL	105Y	AVAILABLE Q1 2025									
	28103515	245/45ZR19	XL	102Y	7.5 - 9.0	8.0	27.7	9.6	752	10	28.7	1874	50	500-A-A
	28103387	255/45ZR19	XL	104W	8.0 - 9.5	8.5	28.1	10.0	742	10	30.0	1984	50	500-A-A
	28103635	235/35ZR20	XL	92Y	8.0 - 9.5	8.5	26.6	9.5	779	10	27.1	1389	50	500-A-A
20"	28103669	245/45ZR20	XL	103Y	7.5 - 9.0	8.0	28.7	9.6	725	10	29.3	1929	50	500-A-A
	28103191	255/40ZR20	XL	101Y	8.5 - 10.0	9.0	28.0	10.2	740	10	30.0	1819	50	500-A-A
	28103182	255/45ZR20	XL	105W	8.0 - 9.5	8.5	29.1	10.0	717	10	30.9	2039	50	500-A-A
	28103687	265/45ZR20	XL	108W	8.5 - 10.0	9.0	29.4	10.5	710	10	32.6	2205	50	500-A-A
	28103550	275/45ZR20	XL	110W	8.5 - 10.5	9.0	29.8	10.7	701	10	33.5	2337	50	500-A-A
		28103669	245/45ZR20	XL	103Y	7.5 - 9.0	8.0	28.7	9.6	725	10	29.3	1929	50

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
21"	28103126	245/35ZR21	XL	96Y	8.0 - 9.5	8.5	27.9	9.8	742	10	27.8	1565	50	500-A-A
	28103792	255/35ZR21	XL	98Y	8.5 - 10.0	9.0	28.1	10.2	736	10	30.2	1653	50	500-A-A
	28103275	265/35ZR21	XL	101Y	9.0 - 10.5	9.5	28.4	10.7	729	10	32.6	1819	50	500-A-A
	28103484	275/35ZR21	XL	103Y	9.0 - 11.0	9.5	28.7	10.9	724	10	33.1	1929	50	500-A-A
22"	28103516	265/35ZR22	XL	102Y	9.0 - 10.5	9.5	29.4	10.7	703	10	33.5	1874	50	500-A-A
	28103890	285/35ZR22	XL	106Y	9.5 - 11.0	10.0	30.0	11.4	690	10	36.6	2094	50	500-A-A





PASSENGER CAR

ZIEX ZE960 A/S

DYNAMIC ALL-SEASON HIGH PERFORMANCE



- Long-Lasting Safety in the Rain
- Dynamic Handling for Modern Coupes and Sedans
- Improved Snow Traction while Maintaining Smooth Ride
- All-Season Performance
- Up to 65,000-Mile Limited Tread Life Warranty


AVAILABLE IN
53 SIZES

RIM SIZING
15"- 20"

SPEED RATING
H / V / W



PERFORMANCE RATINGS

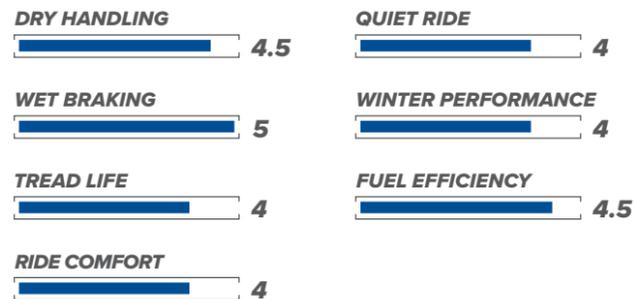

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|--------------------|-----------------------|
| ACURA TLX | INFINITI Q50 |
| BMW 3/4 - SERIES | LEXUS IS |
| DODGE CHALLENGER | MERCEDES BENZ C-CLASS |
| DODGE CHARGER | TESLA MODEL 3 |
| HONDA ACCORD SPORT | TOYOTA CAMRY |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS

FLASK SIPES

continue to evacuate water as the tire wears, improving wet braking performance and hydroplaning resistance throughout the life of the tire.

OPTIMIZED TREAD PATTERN

rigidity coupled with a robust construction enhances the dynamic capability for high performance applications.

CANYON GROOVE TECHNOLOGY

enhances braking performance in the snow, and remains tucked away to preserve a comfortable and quiet ride.

SILICA TREAD COMPOUND

allows the rubber to remain pliable at low temperatures, increasing grip. During dry conditions, as the rubber heats up, chemical bonds remain strong to deliver superb warm weather performance.

LEARN MORE



ZIEX ZE960 A/S

ZIEX ZE960 A/S

DYNAMIC ALL-SEASON HIGH PERFORMANCE

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
15"	28962571	195/50R15	SL	82V	5.5 - 7.0	6.0	22.7	7.9	921	10	17.6	1047	51	640-A-A
	28961543	195/65R15	SL	91H	5.5 - 7.0	6.0	25.1	8.0	845	10	19.8	1356	51	640-A-A
	28962544	205/65R15	XL	99V	5.5 - 7.5	6.0	25.6	8.3	832	10	21.8	1709	50	640-A-A
16"	28962660	195/50R16	SL	84V	5.5 - 7.0	6.0	23.7	7.9	883	10	19.4	1102	51	640-A-A
	28962615	195/55R16	SL	87V	5.5 - 7.0	6.0	24.4	7.9	862	10	20.3	1201	51	640-A-A
	28962690	205/45R16	XL	87V	6.5 - 7.5	7.0	23.3	8.1	895	10	19.2	1201	50	640-A-A
	28962671	205/50R16	SL	87V	5.5 - 7.5	6.5	24.1	8.4	874	10	20.5	1201	51	640-A-A
	28962483	205/55R16	SL	91V	5.5 - 7.5	6.5	24.9	8.4	845	10	21.4	1356	51	640-A-A
	28962652	205/60R16	SL	92V	5.5 - 7.5	6.0	25.8	8.3	821	10	21.8	1389	51	640-A-A
	28962626	205/65R16	SL	95V	5.5 - 7.5	6.0	26.5	8.3	800	10	22.0	1521	51	640-A-A
	28962662	215/55R16	XL	97V	6.0 - 7.5	7.0	25.3	8.9	834	10	23.6	1609	50	640-A-A
	28962479	215/60R16	SL	95V	6.0 - 7.5	6.5	26.3	8.8	811	10	22.9	1521	51	640-A-A
	28962670	225/55R16	SL	95V	6.0 - 8.0	7.0	25.7	9.2	821	10	24.0	1521	51	640-A-A
	28962480	225/60R16	SL	98V	6.0 - 8.0	6.5	26.7	9.1	795	10	25.1	1653	51	640-A-A
	28963674	245/50R16	SL	97W	7.0 - 8.5	7.5	25.7	10.0	821	10	25.1	1609	51	540-A-A
17"	28963740	205/40R17	XL	84W	7.0 - 8.0	7.5	23.5	8.3	886	10	20.3	1102	50	540-A-A
	28963781	205/45R17	XL	88W	6.5 - 7.5	7.0	24.3	8.1	856	10	20.9	1235	50	540-A-A
	28962770	205/50R17	XL	93V	5.5 - 7.5	6.5	25.1	8.4	837	10	21.4	1433	50	640-A-A
	28962792	215/45R17	XL	91V	7.0 - 8.0	7.0	24.7	8.4	842	10	22.0	1356	50	640-A-A
	28962771	215/50R17	SL	91V	6.0 - 7.5	7.0	25.5	8.9	823	10	21.8	1356	51	640-A-A
	28962727	215/55R17	SL	94V	6.0 - 7.5	7.0	26.3	8.9	800	10	22.7	1477	51	640-A-A
	28962782	215/65R17	SL	99V	6.0 - 7.5	6.5	28.1	8.8	755	10	26.7	1709	51	640-A-A
	28963795	225/45R17	XL	94W	7.0 - 8.5	7.5	25.0	8.9	834	10	24.0	1477	50	540-A-A
	28962772	225/50R17	SL	94V	6.0 - 8.0	7.0	25.9	9.2	811	10	23.6	1477	51	640-A-A
	28962762	225/55R17	XL	101V	6.0 - 8.0	7.0	26.8	9.2	788	10	26.5	1819	50	640-A-A
	28962794	235/45R17	XL	97V	7.5 - 9.0	8.0	25.4	9.3	821	10	25.4	1609	50	640-A-A
	28962773	235/50R17	SL	96V	6.5 - 8.5	7.5	26.3	9.6	800	10	24.9	1565	51	640-A-A
	28963725	235/55R17	SL	99W	6.5 - 8.5	7.5	27.2	9.6	778	10	27.6	1709	51	540-A-A
	28963785	245/40R17	XL	95W	8.0 - 9.5	8.5	24.7	9.8	840	10	26.7	1521	50	540-A-A
	28963784	245/45R17	XL	99W	7.5 - 9.0	8.0	25.7	9.6	813	10	26.0	1709	50	540-A-A
	28963776	245/50R17	SL	99W	7.0 - 8.5	7.5	26.7	10.0	788	10	27.8	1709	51	540-A-A

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
18"	28963891	215/40R18	XL	89W	7.0 - 8.5	7.5	24.8	8.6	837	10	22.7	1279	50	540-A-A
	28963899	215/45R18	XL	93W	7.0 - 8.0	7.0	25.7	8.4	808	10	23.4	1433	50	540-A-A
	28963892	225/40R18	XL	92W	7.5 - 9.0	8.0	25.1	9.1	826	10	23.8	1389	50	540-A-A
	28963824	225/45R18	XL	95W	7.0 - 8.5	7.5	26.0	8.9	800	10	24.9	1521	50	540-A-A
	28963805	225/50R18	SL	95W	6.0 - 8.0	7.0	26.9	9.2	778	10	24.7	1521	51	540-A-A
	28963893	235/40R18	XL	95W	8.0 - 9.5	8.5	25.4	9.5	818	10	26.2	1521	50	540-A-A
	28963895	235/45R18	SL	94W	7.5 - 9.0	8.0	26.4	9.3	788	10	26.5	1477	51	540-A-A
	28963825	235/50R18	XL	101W	6.5 - 8.5	7.5	27.3	9.6	769	10	26.7	1819	50	540-A-A
	28962817	235/55R18	XL	104V	6.5 - 8.5	7.5	28.1	9.6	749	10	30.2	1984	50	640-A-A
	28963894	245/40R18	XL	97W	8.0 - 9.5	8.5	25.7	9.8	805	10	27.6	1609	50	540-A-A
	28962865	245/45R18	XL	100V	7.5 - 9.0	8.0	26.7	9.6	781	10	27.8	1764	50	640-A-A
	28963863	245/55R18	SL	103W	7.0 - 8.5	7.5	28.6	10.0	736	10	30.2	1929	51	540-A-A
	28963844	255/40R18	XL	99W	8.5 - 10.0	9.0	26.0	10.2	798	10	28.4	1709	50	540-A-A
	28963866	255/45R18	XL	103W	8.0 - 9.5	8.5	27.1	10.0	771	10	27.3	1929	50	540-A-A
19"	28963937	225/45R19	XL	96W	7.0 - 8.5	7.5	27.0	8.9	769	10	25.6	1565	50	540-A-A
	28962495	235/40R19	XL	96V	8.0 - 9.5	8.5	26.4	9.5	786	10	26.2	1565	50	640-A-A
	28963974	245/40R19	SL	94W	8.0 - 9.5	8.5	26.7	9.8	774	10	28.0	1477	51	540-A-A
	28962780	255/45R19	XL	104V	8.0 - 9.5	8.5	28.1	10.0	742	10	29.5	1764	51	640-A-A
20"	28963985	245/35R20	XL	95W	8.0 - 9.5	8.5	26.8	9.8	774	10	28.0	1521	50	540-A-A
	28963002	245/40R20	XL	99W	8.0 - 9.5	8.5	27.7	9.8	747	10	29.8	1709	50	540-A-A
	28963023	245/45R20	XL	103W	7.5 - 9.0	8.0	28.7	9.6	725	10	29.8	1929	50	540-A-A
	28963001	255/35R20	XL	97W	8.5 - 10.0	9.0	27.0	10.2	767	10	28.0	1609	50	540-A-A





ZIEX CT60 A/S

PREMIUM ALL-SEASON PERFORMANCE AND SAFETY FOR CROSSOVERS



- Increased Handling Specifically for Crossovers
- All-Season Safety for CUVs
- 65,000-Mile Limited Tread Life Warranty
- Exceptional Wet Performance
- Durable, Trustworthy Year-Round Performance


AVAILABLE IN
54 SIZES

RIM SIZING
16"- 22"

SPEED RATING
H / V



PERFORMANCE RATINGS

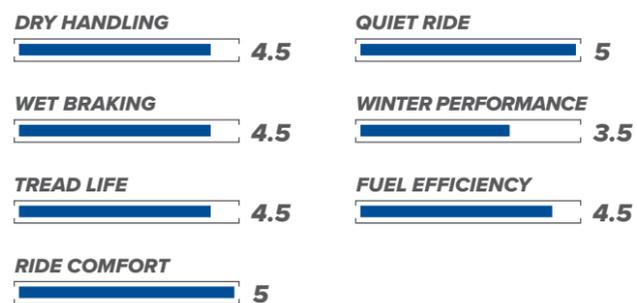

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|--------------------|-----------------|
| CHEVROLET TRAVERSE | KIA SORENTO |
| FORD EDGE | LEXUS RX |
| FORD ESCAPE | NISSAN ROGUE |
| GMC TERRAIN | SUBARU FORESTER |
| HONDA CR-V | TOYOTA RAV4 |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



ASYMMETRIC TREAD PATTERN consisting of inside grooves that provide more edges to increase wet and snow traction, is combined with a high-rigidity outside shoulder rib that delivers handling and stability.



SILICA ENRICHED TREAD COMPOUND delivers superior wear life and wet performance over a wide range of operating temperatures.



3D CANYON SIPES interlock the shoulder blocks to resist wear commonly associated with crossovers due to their higher center of gravity.



FOUR WIDE CIRCUMFERENTIAL GROOVES resist hydroplaning by quickly evacuating water through the tread pattern providing secure contact with the road in heavy rain.

ZIEX CT60 A/S

LEARN MORE



ZIEX CT60 A/S

PREMIUM ALL-SEASON PERFORMANCE AND SAFETY FOR CROSSOVERS

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
16"	28041481	205/70R16	SL	97H	5.0 - 7.0	6.0	27.3	8.2	770	10	25.1	1609	51	740-A-A
	28042275	215/65R16	XL	102V	6.0 - 7.5	6.5	27.0	8.6	786	10	25.6	1874	50	680-A-A
	28043229	215/70R16	SL	100H	5.5 - 7.0	6.5	27.9	8.6	756	10	26.1	1764	51	740-A-A
	28047319	225/70R16	SL	103H	6.0 - 7.5	6.5	28.4	8.9	741	10	28.0	1929	51	740-A-A
	28045157	235/70R16	SL	106H	6.0 - 8.0	7.0	29.0	9.4	729	11	28.7	2094	51	740-A-A
17"	28047536	215/60R17	XL	100V	6.0 - 7.5	6.5	27.2	8.6	777	10	25.6	1764	50	680-A-A
	28049959	225/60R17	SL	99V	6.0 - 8.0	6.5	27.6	8.9	764	10	27.8	1709	51	740-A-A
	28046926	225/65R17	SL	102H	6.0 - 8.0	6.5	28.6	8.9	741	10	28.0	1874	51	740-A-A
	28042725	235/55R17	SL	99V	6.5 - 8.5	7.5	27.0	9.8	744	11	28.9	1709	51	740-A-A
	28048361	235/60R17	SL	102H	6.5 - 8.5	7.0	28.1	9.4	753	10	30.0	1874	51	740-A-A
28044862	235/65R17	SL	104V	6.5 - 8.5	7.0	29.1	9.4	731	10	30.4	1984	51	740-A-A	
18"	28042900	215/55R18	SL	95V	6.0 - 7.5	7.0	27.2	9.0	742	10	25.6	1521	51	740-A-A
	28047926	225/55R18	SL	98V	6.0 - 8.0	7.0	27.8	9.1	758	10	27.1	1653	51	740-A-A
	28041826	225/60R18	SL	100H	6.0 - 8.0	6.5	28.6	9.0	738	10	28.7	1764	51	740-A-A
	28042903	235/50R18	SL	97V	6.5 - 8.5	7.5	27.3	9.6	771	10	28.4	1609	51	740-A-A
	28046809	235/55R18	SL	100V	6.5 - 8.5	7.5	28.1	9.6	748	10	28.9	1764	51	740-A-A
	28043236	235/60R18	XL	107V	6.5 - 8.5	7.0	29.1	9.4	726	10	30.9	2149	50	680-A-A
	28044742	235/65R18	SL	106V	6.5 - 8.5	7.0	30.0	9.4	705	10	32.4	2094	51	740-A-A
	28042820	245/50R18	SL	100V	7.0 - 8.5	7.5	27.7	10.0	728	11	30.6	1764	51	740-A-A
	28041117	245/60R18	SL	105V	7.0 - 8.5	7.0	29.6	9.7	716	10	35.1	2039	51	740-A-A
	28046594	255/55R18	XL	109V	7.0 - 9.0	8.0	29.0	10.4	728	11	33.7	2271	50	680-A-A
	28041812	255/60R18	SL	108H	7.0 - 9.0	7.5	30.0	10.2	705	11	34.2	2205	51	740-A-A
	28041376	255/65R18	SL	111H	7.0 - 9.0	7.5	31.1	10.2	683	11	36.8	2403	51	740-A-A
	28042854	265/60R18	SL	110V	7.5 - 9.5	8.0	31.0	11.0	694	10	41.0	2337	51	600-A-A
	28041823	265/65R18	SL	114H	7.5 - 9.5	8.0	32.0	11.0	673	10	41.2	2601	51	600-A-A
	28041897	275/60R18	XL	117H	7.5 - 9.5	8.0	31.0	11.0	686	10	43.0	2833	50	600-A-A
28042856	285/60R18	SL	116V	8.0 - 10.0	8.5	32.0	12.0	675	11	48.1	2756	51	600-A-A	

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
19"	28043062	225/55R19	SL	99V	6.0 - 8.0	7.0	28.8	9.1	730	10	28.4	1709	51	740-A-A
	28046456	235/45R19	XL	99V	7.5 - 9.0	8.0	27.4	9.2	760	10	27.0	1709	50	680-A-A
	28045081	235/50R19	SL	99V	6.5 - 8.5	7.5	28.3	9.6	742	10	30.2	1709	51	740-A-A
	28042970	235/55R19	XL	105V	6.5 - 8.5	7.5	29.2	9.6	720	10	30.6	2039	50	680-A-A
	28042904	245/45R19	XL	102V	7.5 - 9.0	8.0	27.6	9.6	730	11	28.9	1874	50	680-A-A
	28047020	245/55R19	SL	103V	7.0 - 8.5	7.5	29.6	9.9	711	10	31.5	1929	51	740-A-A
	28042996	255/40R19	XL	100V	8.5 - 10.0	9.0	27.1	10.2	794	11	28.2	1764	50	680-A-A
	28045479	255/50R19	XL	107V	7.0 - 9.0	8.0	29.1	10.4	723	11	34.2	2149	50	680-A-A
	28042943	255/55R19	XL	111V	7.0 - 9.0	8.0	30.0	10.6	672	11	34.4	2403	50	680-A-A
	28045772	255/60R19	SL	109H	7.0 - 9.0	7.5	31.1	10.2	680	11	34.2	2271	51	740-A-A
20"	28047541	265/50R19	XL	110V	7.5 - 9.5	8.5	29.5	10.8	713	11	34.6	2337	50	680-A-A
	28042032	275/55R19	SL	111V	7.5 - 9.5	8.5	30.9	11.2	684	10	42.5	2403	51	600-A-A
	28048062	235/55R20	SL	102V	6.5 - 8.5	7.5	30.2	9.6	697	10	34.6	1874	51	740-A-A
	28048659	245/50R20	SL	102V	7.0 - 8.5	7.5	29.7	9.9	708	10	34.4	1874	51	740-A-A
	28041828	245/60R20	SL	107H	7.0 - 8.5	7.0	32.0	10.0	668	10	39.9	2149	51	600-A-A
	28042013	255/45R20	XL	105V	8.0 - 9.5	8.5	29.1	10.0	735	11	32.6	2039	50	680-A-A
	28043623	255/50R20	XL	109V	7.0 - 9.0	8.0	30.1	10.4	699	11	37.7	2271	50	680-A-A
	28042950	255/55R20	XL	110V	7.0 - 9.0	8.0	31.0	10.4	680	11	35.5	2337	50	680-A-A
	28042587	265/45R20	XL	108V	8.5 - 10.0	9.0	29.0	11.0	709	10	36.4	2205	50	600-A-A
	28045726	265/50R20	XL	111V	7.5 - 9.5	8.5	30.5	10.8	690	11	36.8	2403	50	680-A-A
22"	28042016	275/45R20	XL	110V	8.5 - 10.5	9.0	30.0	11.0	700	10	38.1	2337	50	600-A-A
	28041777	275/50R20	SL	109H	7.5 - 9.5	8.5	31.0	11.0	681	10	41.7	2271	51	600-A-A
	28041021	275/55R20	XL	117H	7.5 - 9.5	8.5	32.0	11.0	661	10	46.3	2833	50	600-A-A
	28041003	275/60R20	XL	116H	7.5 - 9.5	8.0	33.0	11.0	641	10	46.3	2756	50	600-A-A
	28042024	285/50R20	SL	112V	8.0 - 10.0	9.0	31.0	12.0	673	11	44.3	2469	51	600-A-A
	28042035	275/50R22	SL	111V	7.5 - 9.5	8.5	33.0	11.0	638	10	49.6	2403	51	600-A-A
	28041219	285/45R22	XL	114H	9.0 - 10.5	9.5	32.0	11.0	647	11	47.0	2601	50	600-A-A



AKLIMATE

ALL-AROUND PERFORMANCE BUILT FOR ANY CLIMATE

- Falken's First All-Weather Tire
- Severe Snow Rated for All-Weather Confidence
- Designed to Drive on One Set of Tires Year Round
- Dry, Wet, And Snow Traction
- 65,000-Mile Limited Tread Life Warranty


AVAILABLE IN
88 SIZES

RIM SIZING
15"- 22"


SPEED RATING
H / V / W



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.




PASSENGER CAR



SUV / CUV

TIRE HIGHLIGHTS



ADVANCED 4D NANO DESIGN TECHNOLOGY

was used to develop an all-new rubber compound that delivers an ideal balance of wet handling, snow traction, and tread life.




TREAD PATTERN

was designed to combine optimized sipe depths with tread pattern rigidity, ensuring confident traction throughout the life of the tire.



CANYON GROOVES

provide enhanced snow capability while maintaining a comfortable, quiet ride.




3D CANYON SIPE TECHNOLOGY

allows for more sipes along the shoulder blocks, delivering strong traction in various conditions.



PERFORMANCE RATINGS

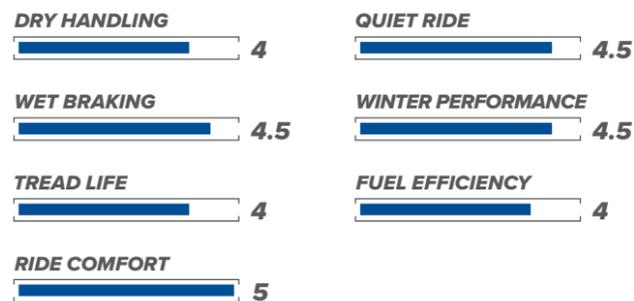

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|--------------------|-------------------|
| CHEVROLET SUBURBAN | LEXUS RX |
| CHEVROLET TAHOE | MERCEDES BENZ GLC |
| CHRYSLER PACIFICA | NISSAN VERSA |
| FORD EXPLORER | SUBARU FORESTER |
| HONDA CIVIC | TOYOTA CAMRY |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

AKLIMATE

LEARN MORE



AKLIMATE

ALL-AROUND PERFORMANCE BUILT FOR ANY CLIMATE

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.
15"	28391611	175/65R15	SL	84H	5.0 - 6.0	5.0	24.1	7.0	878	10	17.0	1102	51	640-B-A
	28392937	185/55R15	SL	82V	5.0 - 6.5	6.0	23.1	7.6	913	10	16.8	1047	51	640-B-A
	28391331	185/60R15	SL	84H	5.0 - 6.5	5.5	23.9	7.5	884	10	17.9	1102	51	640-B-A
	28391310	185/65R15	SL	88H	5.0 - 6.5	5.5	24.5	7.4	864	10	18.7	1235	51	640-B-A
	28391962	195/60R15	SL	88H	5.5 - 7.0	6.0	24.5	8.0	864	10	19.0	1235	51	640-B-A
	28391864	195/65R15	SL	91H	5.5 - 7.0	6.0	25.3	7.9	838	10	19.4	1356	51	640-B-A
	28391820	205/65R15	XL	99H	5.5 - 7.5	6.0	25.8	8.2	822	11	22.0	1709	50	640-B-A
16"	28391287	185/55R16	SL	83H	5.0 - 6.5	6.0	24.1	7.6	873	10	18.5	1074	51	640-B-A
	28392863	195/55R16	SL	87V	5.5 - 7.0	6.0	24.6	7.9	853	10	20.1	1201	51	640-B-A
	28392234	205/55R16	SL	91V	5.5 - 7.5	6.5	25.2	8.4	837	11	21.4	1356	51	640-B-A
	28392687	205/60R16	SL	92V	5.5 - 7.5	6.0	26.0	8.3	812	11	21.6	1389	51	640-B-A
	28391196	205/65R16	SL	95H	5.5 - 7.5	6.0	26.8	8.2	792	11	22.9	1521	51	640-B-A
	28391622	215/55R16	XL	97H	6.0 - 7.5	7.0	25.6	8.9	824	11	24.0	1609	50	640-A-A
	28392460	215/60R16	SL	95V	6.0 - 7.5	6.5	26.5	8.8	800	11	23.1	1521	51	640-A-A
	28391731	215/65R16	SL	98H	6.0 - 7.5	6.5	27.4	8.7	775	11	24.9	1653	51	640-A-A
	28391440	215/70R16	SL	100H	5.5 - 7.0	6.5	27.9	8.7	756	11	27.3	1764	51	640-A-A
	28391256	225/60R16	SL	98H	6.0 - 8.0	6.5	26.9	9.1	786	11	25.6	1653	51	640-A-A
	28391348	225/65R16	SL	100H	6.0 - 8.0	6.5	27.9	9.0	762	11	27.8	1764	51	640-A-A
	28391613	225/70R16	SL	103H	6.0 - 7.5	6.5	28.4	9.0	741	11	28.4	1929	51	640-A-A
	28391952	235/60R16	SL	100H	6.5 - 8.5	7.0	27.1	9.4	783	11	28.9	1764	51	640-A-A
	28391423	235/65R16	SL	103H	6.5 - 8.5	7.0	28.0	9.4	759	11	30.0	1929	51	640-A-A
	28391973	235/70R16	SL	106H	6.0 - 8.0	7.0	29.0	9.4	729	11	32.6	2094	51	640-A-A
17"	28392286	205/50R17	XL	93V	5.5 - 7.5	6.5	25.4	8.4	827	11	23.1	1433	50	640-B-A
	28392927	205/55R17	SL	91V	5.5 - 7.5	6.5	26.2	8.4	803	11	22.3	1356	51	640-B-A
	28392801	215/45R17	SL	87V	7.0 - 8.0	7.0	24.9	8.4	837	11	20.9	1201	51	640-A-A
	28392907	215/50R17	XL	95V	6.0 - 7.5	7.0	25.7	8.9	817	11	22.7	1521	50	640-A-A
	28392892	215/55R17	SL	94V	6.0 - 7.5	7.0	26.6	8.9	791	11	22.9	1477	51	640-A-A
	28391200	215/60R17	SL	96H	6.0 - 7.5	6.5	27.5	8.8	769	11	25.4	1565	51	640-A-A
	28391943	215/65R17	SL	99H	6.0 - 7.5	6.5	28.4	8.7	746	11	26.7	1709	51	640-A-A
	28392996	225/45R17	XL	94V	7.0 - 8.5	7.5	25.2	8.9	827	11	23.4	1477	50	640-A-A
	28392391	225/50R17	XL	98V	6.0 - 8.0	7.0	26.2	9.2	803	11	24.7	1653	50	640-A-A
	28392718	225/55R17	SL	97V	6.0 - 8.0	7.0	27.1	9.2	780	11	26.9	1609	51	640-A-A
	28391637	225/60R17	SL	99H	6.0 - 8.0	6.5	28.0	9.1	756	11	26.9	1709	51	640-A-A
	28391460	225/65R17	SL	102H	6.0 - 8.0	6.5	28.9	9.0	734	11	30.0	1874	51	640-A-A
	28392832	235/45R17	XL	97V	7.5 - 9.0	8.0	25.6	9.3	815	11	24.0	1609	50	640-A-A
	28391319	235/50R17	SL	96H	6.5 - 8.5	7.5	26.6	9.6	791	11	26.7	1565	51	640-A-A
	28392905	235/55R17	SL	99V	6.5 - 8.5	7.5	27.2	9.6	777	11	28.9	1709	51	640-A-A
	28391381	235/60R17	SL	102H	6.5 - 8.5	7.0	28.1	9.4	753	11	30.6	1874	51	640-A-A
	28391150	235/65R17	SL	104H	6.5 - 8.5	7.0	29.1	9.4	731	11	32.8	1984	51	640-A-A
	28392233	245/45R17	XL	99V	7.5 - 9.0	8.0	25.9	9.6	806	11	26.2	1709	50	640-A-A
	28391235	245/65R17	SL	107H	7.0 - 8.5	7.0	29.5	9.8	719	11	37.0	2149	51	640-A-A

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire. Always refer to vehicle owners manual for proper tire fitment.

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load Single / Dual (lbs)	Max Pressure (psi cold)	U.T.Q.G.	
18"	28392728	215/45R18	XL	93V	7.0 - 8.0	7.0	25.9	8.4	803	11	22.3	1433	50	640-A-A	
	28391996	215/55R18	SL	95H	6.0 - 7.5	7.0	27.6	8.9	763	11	25.4	1521	51	640-A-A	
	28392435	225/40R18	XL	92V	7.5 - 9.0	8.0	25.3	9.1	821	11	24.3	1389	50	640-A-A	
	28392457	225/45R18	XL	95V	7.0 - 8.5	7.5	26.2	8.9	794	11	24.5	1521	50	640-A-A	
	28392586	225/50R18	SL	95V	6.0 - 8.0	7.0	27.2	9.2	774	11	26.5	1521	51	640-A-A	
	28392506	225/55R18	SL	98V	6.0 - 8.0	7.0	28.1	9.2	750	11	28.2	1653	51	640-A-A	
	28391341	225/60R18	XL	104H	6.0 - 8.0	6.5	28.9	9.1	730	11	29.1	1984	50	640-A-A	
	28392726	235/40R18	XL	95W	8.0 - 9.5	8.5	25.6	9.5	811	11	25.6	1521	50	640-A-A	
	28392920	235/45R18	SL	94V	7.5 - 9.0	8.0	26.6	9.3	785	11	25.8	1477	51	640-A-A	
	28392994	235/45R18	XL	98V	7.5 - 9.0	8.0	26.6	9.3	785	11	25.6	1653	50	640-A-A	
	28392630	235/50R18	SL	97V	6.5 - 8.5	7.5	27.6	9.6	763	11	28.0	1609	51	640-A-A	
	28392675	235/55R18	SL	100V	6.5 - 8.5	7.5	28.1	9.6	748	11	30.4	1764	51	640-A-A	
	28392584	235/60R18	XL	107V	6.5 - 8.5	7.0	29.1	9.4	726	11	32.6	2149	50	640-A-A	
	28392202	235/65R18	SL	106V	6.5 - 8.5	7.0	30.0	9.4	705	11	36.6	2094	51	640-A-A	
	28392504	245/40R18	XL	97V	8.0 - 9.5	8.5	25.9	9.8	802	11	26.2	1609	50	640-A-A	
	28392212	245/45R18	XL	100V	7.5 - 9.0	8.0	26.9	9.6	776	11	27.3	1764	50	640-A-A	
	28392406	245/50R18	SL	100V	7.0 - 8.5	7.5	27.7	10.0	760	11	31.1	1764	51	640-A-A	
	28392770	245/55R18	SL	103V	7.0 - 8.5	7.5	28.6	10.0	738	11	32.0	1929	51	640-A-A	
	28392853	245/60R18	SL	105V	7.0 - 8.5	7.0	29.6	9.8	716	11	33.5	2039	51	640-A-A	
	28392103	255/55R18	XL	109V	7.0 - 9.0	8.0	29.0	10.4	728	11	35.1	2271	50	640-A-A	
19"	28391599	255/65R18	SL	111H	7.0 - 9.0	7.5	31.1	10.3	683	11	42.8	2403	51	640-A-A	
	28392555	265/60R18	SL	110V	7.5 - 9.5	8.0	30.5	10.7	696	11	40.8	2337	51	640-A-A	
	28393790	225/45R19	XL	96W	7.0 - 8.5	7.5	27.2	8.9	763	11	26.5	1565	50	640-A-A	
	28392342	225/55R19	XL	103V	6.0 - 8.0	7.0	29.1	9.2	723	11	30.2	1929	50	640-A-A	
	28392239	235/40R19	XL	96V	8.0 - 9.5	8.5	26.7	9.5	779	11	26.9	1565	50	640-A-A	
	28391587	235/45R19	XL	99H	7.5 - 9.0	8.0	27.6	9.3	755	11	28.0	1709	50	640-A-A	
	28392479	235/50R19	SL	99V	6.5 - 8.5	7.5	28.6	9.6	735	11	30.0	1709	51	640-A-A	
	28392235	235/55R19	XL	105V	6.5 - 8.5	7.5	29.2	9.6	720	11	34.0	2039	50	640-A-A	
	28392837	245/40R19	SL	94W	8.0 - 9.5	8.5	27.0	9.8	771	11	28.4	1477	51	640-A-A	
	28392355	245/45R19	XL	102V	7.5 - 9.0	8.0	27.9	9.6	747	11	29.8	1874	50	640-A-A	
	28391517	245/55R19	SL	103H	7.0 - 8.5	7.5	29.6	10.0	711	11	33.5	1929	51	640-A-A	
	28392491	255/40R19	XL	100V	8.5 - 10.0	9.0	27.3	10.2	763	11	29.8	1764	50	640-A-A	
	28392761	255/50R19	XL	107V	7.0 - 9.0	8.0	29.1	10.4	723	11	35.5	2149	50	640-A-A	
	28392807	255/55R19	XL	111V	7.0 - 9.0	8.0	30.0	10.4	702	11	36.8	2403	50	640-A-A	
	28391598	255/60R19	SL	109H	7.0 - 9.0	7.5	31.1	10.2	680	11	37.5	2271	51	640-A-A	
	20"	28392721	235/55R20	SL	102V	6.5 - 8.5	7.5	30.2	9.6	697	11	34.4	1874	51	640-A-A
		28392382	245/45R20	XL	103V	7.5 - 9.0	8.0	28.9	9.6	720	11	30.6	1929	50	640-A-A
		28392599	245/50R20	SL	102V	7.0 - 8.5	7.5	29.7	10.0	708	11	35.7	1874	51	640-A-A
28392619		255/45R20	XL	105V	8.0 - 9.5	8.5	29.1	10.1	717	11	34.8	2039	50	640-A-A	
28392899		255/50R20	XL	109V	7.0 - 9.0	8.0	30.1	10.4	699	11	39.5	2271	50	640-A-A	
28391865		255/55R20	SL	107H	7.0 - 9.0	8.0	31.0	10.4	680	11	39.2	2149	51	640-A-A	
28392459		265/50R20	XL	111V	7.5 - 9.5	8.5	30.5	10.9	690	11	39.7	2403	50	640-A-A	
28392474		275/45R20	XL	110V	8.5 - 10.5	9.0	29.8	10.8	701	11	39.9	2337	50	640-A-A	
28391950		275/55R20	SL	113H	7.5 - 9.5	8.5	31.9	11.2	662	11	45.9	2535	51	640-A-A	
28391713		275/60R20	SL	115H	7.5 - 9.5	8.0	33.0	11.0	642	11	47.0	2679	51	640-A-A	
22"	28392243	285/50R20	XL	116V	8.0 - 10.0	9.0	31.3	11.7	674	11	47.2	2756	50	640-A-A	
	28391421	285													



PASSENGER CAR

SINCERA SN250 A/S

LONG-LASTING ALL-SEASON PERFORMANCE TOURING



- Falken's Longest Lasting Tire
- Year-Round Handling for Wide Range of Vehicles
- Additional Grip in Light Snow
- All-Season Drivability
- Up to 80,000-Mile Limited Tread Life Warranty


AVAILABLE IN
63 SIZES

RIM SIZING
14"- 18"

SPEED RATING
T / H / V



PERFORMANCE RATINGS

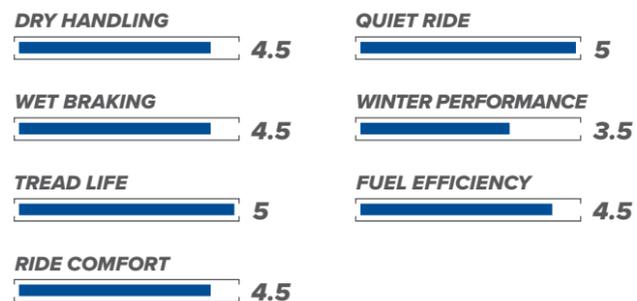

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-----------------|-------------------|
| FORD FOCUS | NISSAN ALTIMA |
| FORD FUSION | TOYOTA CAMRY |
| HONDA ACCORD | TOYOTA PRIUS |
| HYUNDAI ELANTRA | VOLKSWAGEN JETTA |
| HYUNDAI SONATA | VOLKSWAGEN PASSAT |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



SYMMETRICAL RIB DESIGN
created to optimize even wear.



3D CANYON SIPE TECHNOLOGY
increases edges for enhanced ice braking and all-weather handling while the design's interlocking characteristics form a more solid tread block under load for excellent dry weather performance.



ANGLED TREAD GROOVES
on every tread rib add void for packed snow.



HIGH SIPE DENSITY
for enhanced all-season drivability.

LEARN MORE



SINCERA SN250 A/S

SINCERA SN250 A/S

LONG-LASTING ALL-SEASON PERFORMANCE TOURING

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.	
14"	28294442	175/65R14	SL	82T	5.0 - 6.0	5.0	23.1	7.0	902	11	15.9	1047	51	720-A-B	
	28291451	185/60R14	SL	82H	5.0 - 6.5	5.5	22.9	7.5	921	11	16.8	1047	51	720-A-A	
	28294443	185/65R14	SL	86T	5.0 - 6.5	5.5	23.5	7.5	898	11	16.8	1168	51	720-A-B	
	28294473	185/70R14	SL	88T	4.5 - 6.0	5.5	24.3	7.5	871	11	17.9	1235	51	720-A-B	
	28294475	195/70R14	SL	91T	5.0 - 6.5	6.0	24.9	8.0	854	11	19.2	1356	51	720-A-B	
15"	28291563	175/65R15	SL	84H	5.0 - 6.0	5.0	24.1	7.0	877	11	17.0	1102	51	720-A-B	
	28292575	185/55R15	SL	82V	5.0 - 6.5	6.0	23.1	7.6	915	11	16.8	1047	51	720-A-A	
	28291516	185/60R15	SL	84H	5.0 - 6.5	5.5	23.9	7.5	883	11	17.2	1102	51	720-A-B	
	28292099	185/65R15	SL	88H	5.0 - 6.5	5.5	24.5	7.5	862	11	18.1	1235	51	720-A-A	
	28298331	195/55R15	SL	85V	5.5 - 7.0	6.0	23.5	7.9	898	11	23.6	1135	51	720-A-A	
	28291551	195/60R15	SL	88H	5.5 - 7.0	6.0	24.3	8.0	868	11	19.2	1235	51	720-A-B	
	28291543	195/65R15	SL	91H	5.5 - 7.0	6.0	25.1	8.0	845	11	19.0	1356	51	720-A-A	
	28294543	195/65R15	SL	91T	5.5 - 7.0	6.0	25.1	8.0	845	11	19.0	1356	51	720-A-B	
	28291552	205/60R15	SL	91H	5.5 - 7.5	6.0	24.8	8.3	854	11	20.5	1356	51	720-A-B	
	28292560	205/65R15	XL	99H	5.5 - 7.5	6.0	25.6	8.3	832	11	22.0	1709	50	720-A-A	
	28294476	205/70R15	SL	96T	5.0 - 7.0	6.0	26.4	8.3	805	11	21.6	1565	51	720-A-B	
	28291553	215/60R15	SL	94H	6.0 - 7.5	6.5	25.3	8.8	837	11	20.7	1477	51	720-A-B	
	28294545	215/65R15	SL	96T	6.0 - 7.5	6.5	26.1	8.8	813	11	23.8	1565	51	720-A-B	
	28294477	215/70R15	SL	98T	5.5 - 7.0	6.5	27.0	8.8	790	11	24.7	1653	51	720-A-B	
	28294478	225/70R15	SL	100T	6.0 - 7.5	6.5	27.5	9.1	776	11	26.2	1764	51	720-A-B	
	28294108	235/75R15	SL	105T	6.0 - 8.0	6.5	28.9	9.3	740	11	29.5	2039	51	720-A-B	
	16"	28291677	185/55R16	SL	83H	5.0 - 6.5	6.0	24.1	7.6	874	11	19.2	1074	51	720-A-B
		28294615	195/55R16	SL	87T	5.5 - 7.0	6.0	24.5	7.9	860	11	20.1	1201	51	720-A-B
28294671		205/50R16	SL	87T	5.5 - 7.5	6.5	24.1	8.4	874	11	20.3	1201	51	720-A-B	
28291483		205/55R16	SL	91H	5.5 - 7.5	6.5	24.9	8.4	845	11	21.2	1356	51	720-A-A	
28294483		205/55R16	SL	91T	5.5 - 7.5	6.5	24.9	8.4	845	11	21.2	1356	51	720-A-B	
28291652		205/60R16	SL	92H	5.5 - 7.5	6.0	25.8	8.3	818	11	20.9	1389	51	720-A-A	
28291626		205/65R16	SL	95H	5.5 - 7.5	6.0	26.5	8.3	798	11	22.0	1521	51	720-A-A	
28291662		215/55R16	XL	97H	6.0 - 7.5	7.0	25.3	8.9	834	11	24.7	1609	50	720-A-A	
28291479		215/60R16	SL	95V	6.0 - 7.5	6.5	26.3	8.8	805	11	22.3	1521	51	720-A-A	
28294479		215/60R16	SL	95T	6.0 - 7.5	6.5	26.3	8.8	805	11	22.0	1521	51	720-A-B	
28294681		215/65R16	SL	98T	6.0 - 7.5	6.5	27.1	8.8	783	11	24.7	1653	51	720-A-B	
28294100		215/70R16	SL	100T	5.5 - 7.0	6.5	28.0	8.8	760	11	25.8	1764	51	720-A-B	
28296913		225/55R16	SL	95V	6.0 - 8.0	7.0	25.8	9.2	821	11	25.8	1521	51	720-A-A	
28296749		225/60R16	SL	98H	6.0 - 8.0	6.5	26.7	9.1	793	11	26.2	1653	51	720-A-A	
28291673		225/65R16	SL	100H	6.0 - 8.0	6.5	27.6	9.1	769	11	27.8	1764	51	720-A-B	
28294104		225/70R16	SL	103T	6.0 - 7.5	6.5	28.5	9.1	747	11	26.9	1929	51	720-A-B	
28291655		235/60R16	SL	100H	6.5 - 8.5	7.0	27.2	9.5	781	11	27.1	1764	51	720-A-A	
28294629		235/65R16	SL	103T	6.5 - 8.5	7.0	28.1	9.5	758	11	28.0	1929	51	720-A-B	
28294109	235/70R16	SL	106T	6.0 - 8.0	7.0	29.1	9.5	734	11	29.5	2094	51	720-A-B		

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
17"	28294959	205/50R17	XL	93V	5.5 - 7.5	6.5	25.1	8.4	837	11	22.7	1433	50	720-A-A
	28296783	215/45R17	SL	87V	7.0 - 8.0	7.0	24.7	8.4	842	11	25.1	1201	51	720-A-A
	28292771	215/50R17	XL	95V	6.0 - 7.5	7.0	25.5	8.9	834	11	23.8	1521	50	720-A-A
	28292727	215/55R17	SL	94V	6.0 - 7.5	7.0	26.3	8.9	800	11	22.7	1477	51	720-A-A
	28294727	215/55R17	SL	94T	6.0 - 7.5	7.0	26.3	8.9	800	11	22.7	1477	51	720-A-B
	28294729	215/60R17	SL	96T	6.0 - 7.5	6.5	27.3	8.8	774	11	24.7	1565	51	720-A-B
	28294782	215/65R17	SL	99T	6.0 - 7.5	6.5	28.1	8.8	753	11	25.8	1709	51	720-A-B
	28295334	225/45R17	XL	94V	7.0 - 8.5	7.5	25.0	8.9	834	11	25.4	1477	50	720-A-A
	28292772	225/50R17	XL	98V	6.0 - 8.0	7.0	25.9	9.2	811	11	25.4	1653	50	720-A-A
	28292762	225/55R17	SL	97V	6.0 - 8.0	7.0	26.8	9.2	786	11	25.6	1609	51	720-A-A
	28294728	225/60R17	SL	99T	6.0 - 8.0	6.5	27.8	9.1	762	11	26.5	1709	51	720-A-B
	28294775	225/65R17	SL	102T	6.0 - 8.0	6.5	28.6	9.1	740	11	28.0	1874	51	720-A-B
	28294725	235/55R17	SL	99T	6.5 - 8.5	7.5	27.2	9.6	776	11	27.1	1709	51	720-A-B
	28294717	235/60R17	SL	102T	6.5 - 8.5	7.0	28.2	9.5	751	11	28.7	1874	51	720-A-B
	28294790	235/65R17	SL	104T	6.5 - 8.5	7.0	29.1	9.5	730	11	29.8	1984	51	720-A-B
18"	28294900	215/55R18	SL	95T	6.0 - 7.5	7.0	27.3	8.9	769	11	24.3	1521	51	720-A-B
	28294339	225/45R18	XL	95V	7.0 - 8.5	7.5	26.0	8.9	800	11	26.5	1521	50	720-A-A
	28294805	225/50R18	SL	95T	6.0 - 8.0	7.0	26.9	9.2	781	11	26.7	1521	51	720-A-B
	28294889	225/55R18	SL	98T	6.0 - 8.0	7.0	27.8	9.2	758	11	27.1	1653	51	720-A-B
	28291826	225/60R18	SL	100H	6.0 - 8.0	6.5	28.7	9.1	736	11	28.9	1764	51	720-A-A
	28295652	235/45R18	SL	94V	7.5 - 9.0	8.0	26.4	9.3	788	11	26.9	1477	51	720-A-A
	28299880	235/50R18	SL	97V	6.5 - 8.5	7.5	27.3	9.6	769	11	27.8	1609	51	720-A-A
	28295850	235/55R18	SL	100V	6.5 - 8.5	7.5	28.2	9.6	749	11	28.4	1764	51	720-A-A



WINTERPEAK F-ICE 1

STUDDABLE SAFETY IN ANY WINTER CONDITION

- Falken's Only Studdable Winter Tire
- Best-In-Class Ice Braking
- Exceptional Traction in Snow and Slush
- Superior Grip in the Cold
- Designed for the Coldest Regions

AVAILABLE IN
50 SIZES

RIM SIZING
15"- 20"

SPEED RATING
T



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements. Please check local laws for seasonal timing and allowability of studs on public roads.




PASSENGER CAR



SUV | CUV

PERFORMANCE RATINGS

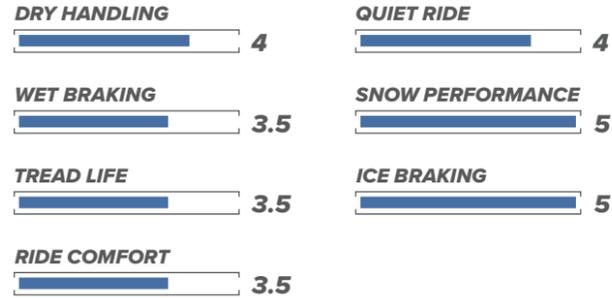

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-----------------|-----------------|
| HONDA ACCORD | SUBARU IMPREZA |
| HONDA CIVIC | TOYOTA CAMRY |
| MAZDA 3 | TOYOTA RAV4 |
| MAZDA CX-9 | TOYOTA SIENNA |
| SUBARU FORESTER | VOLKSWAGEN GOLF |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS

- 3D CANYON SIPE TECHNOLOGY** allows for more sipes across the surface of the tire, delivering superior traction in a variety of winter conditions.
- 4D NANO DESIGN TECHNOLOGY** was used to engineer a tread compound that remains flexible in the coldest winter conditions, resulting in more grip than you'll get from an All-Season tire.
- LEGALIZED STUD COUNT AND PLACEMENT** and featuring the industry's 3PMSF symbol, the F-ICE 1 meets all necessary legal requirements for responsible winter driving.
- HIGH-SIPE DENSITY** provides more biting edges across the tread surface, resulting in category-leading ice braking performance.

WINTERPEAK F-ICE 1



WINTERPEAK F-ICE 1

STUDDABLE SAFETY IN ANY WINTER CONDITION

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Recommended TSMI Stud Size	Stud Count	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Dia. (mm)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
15"	28384542	185/65R15	XL	92T	TSMI 12	110	5.0 - 6.5	5.5	24.4	621	7.4	865	11	20.9	1389	50
	28384551	195/60R15	XL	92T	TSMI 12	110	5.5 - 7.0	6.0	24.2	615	7.9	871	11	20.7	1389	50
	28384543	195/65R15	XL	95T	TSMI 12	110	5.5 - 7.0	6.0	25.0	635	7.9	845	11	21.6	1521	50
	28384544	205/65R15	SL	94T	TSMI 12	110	5.5 - 7.5	6.0	25.5	647	8.2	832	11	23.5	1477	44
16"	28384483	205/55R16	XL	94T	TSMI 12	130	5.5 - 7.5	6.5	25.0	634	8.4	845	11	22.9	1477	50
	28384652	205/60R16	XL	96T	TSMI 12	130	5.5 - 7.5	6.0	25.7	652	8.2	821	11	23.1	1565	50
	28384626	205/65R16	XL	99T	TSMI 12	130	5.5 - 7.5	6.0	26.5	672	8.2	800	11	24.9	1709	50
	28384662	215/55R16	XL	97T	TSMI 12	130	6.0 - 7.5	7.0	25.4	644	8.9	834	11	25.1	1609	50
	28384479	215/60R16	XL	99T	TSMI 12	130	6.0 - 7.5	6.5	26.1	664	8.7	811	11	27.1	1709	50
	28384681	215/65R16	XL	102T	TSMI 12	130	6.0 - 7.5	6.5	27.0	686	8.7	786	11	27.5	1874	50
	28384100	215/70R16	SL	100T	TSMI 13	130	5.5 - 7.0	6.5	27.9	708	8.7	755	11	30.1	1764	44
	28384480	225/60R16	SL	98T	TSMI 12	130	6.0 - 8.0	6.5	26.6	676	9.0	795	11	26.2	1653	44
	28384673	225/65R16	SL	100T	TSMI 12	130	6.0 - 8.0	6.5	27.5	698	9.0	771	11	29.5	1764	44
	28384629	235/65R16	SL	103T	TSMI 12	130	6.5 - 8.5	7.0	28.0	712	9.4	760	11	30.8	1929	44
17"	28152770	205/50R17	XL	93T	TSMI12	130	5.5 - 7.5	6.5	25.1	638	8.2	837	11	24.0	1433	50
	28384792	215/45R17	XL	91T	TSMI 12	130	7.0 - 8.0	7.0	24.6	626	8.4	842	11	22.4	1356	50
	28384771	215/50R17	XL	95T	TSMI 12	130	6.0 - 7.5	7.0	25.5	648	8.7	823	11	24.4	1521	50
	28384727	215/55R17	XL	98T	TSMI 12	130	6.0 - 7.5	7.0	26.4	670	8.9	800	11	24.9	1653	50
	28152729	215/60R17	SL	96T	TSMI12	130	6.0 - 7.5	6.5	27.2	690	8.7	778	11	26.0	1565	44
	28152782	215/65R17	SL	99T	TSMI12	130	6.0 - 7.5	6.5	28.0	712	8.7	755	11	28.0	1709	44
	28384795	225/45R17	XL	94T	TSMI 12	130	7.0 - 8.5	7.5	25.0	634	8.9	834	11	24.4	1477	50
	28384772	225/50R17	XL	98T	TSMI 12	130	6.0 - 8.0	7.0	25.9	658	9.0	811	11	26.4	1653	50
	28384762	225/55R17	XL	101T	TSMI 12	130	6.0 - 8.0	7.0	26.9	682	9.2	788	11	26.8	1819	50
	28384728	225/60R17	XL	103T	TSMI 12	130	6.0 - 8.0	6.5	27.6	702	9.0	764	11	29.5	1929	50
	28384775	225/65R17	XL	106T	TSMI 12	130	6.0 - 8.0	6.5	28.5	724	9.0	742	11	30.6	2094	50
	28384725	235/55R17	XL	103T	TSMI 12	130	6.5 - 8.5	7.5	27.2	692	9.6	778	11	29.0	1929	50
	28384717	235/60R17	SL	102T	TSMI 12	130	6.5 - 8.5	7.0	28.1	714	9.4	753	11	29.7	1874	44
	28384790	235/65R17	XL	108T	TSMI 13	130	6.5 - 8.5	7.0	29.0	738	9.4	732	12	31.0	2205	50
	28152768	245/65R17	SL	107T	TSMI 13	130	7.0 - 8.5	7.0	29.6	751	9.8	718	12	38.0	2149	44
	28152300	265/70R17	SL	115T	TSMI 13	130	7.0 - 9.0	8.0	31.7	805	10.7	667	12	43.0	2679	44

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Recommended TSMI Stud Size	Stud Count	Approved Rim Width (in)	Measuring Rim (in)	Overall Dia. (in)	Overall Dia. (mm)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
18"	28152805	225/50R18	XL	99T	TSMI12	130	6.0 - 8.0	7.0	26.9	683	9.0	778	11	28.0	1709	50
	28152889	225/55R18	XL	102T	TSMI 12	130	6.0 - 8.0	7.0	27.8	707	9.2	758	11	29.0	1874	50
	28384826	225/60R18	XL	104T	TSMI 12	130	6.0 - 8.0	6.5	28.6	727	9.0	736	11	30.1	1984	50
	28384895	235/45R18	XL	98T	TSMI 12	130	7.5 - 9.0	8.0	26.3	669	9.3	788	11	26.6	1653	50
	28384817	235/55R18	XL	104T	TSMI 12	130	6.5 - 8.5	7.5	28.2	717	9.6	749	11	31.2	1984	50
	28384816	235/60R18	XL	107T	TSMI 13	130	6.5 - 8.5	7.0	29.1	739	9.4	725	11	32.6	2149	50
	28152815	235/65R18	XL	110T	TSMI 13	130	6.5 - 8.5	7.0	30.0	763	9.4	705	11	33.0	2337	50
	28152865	245/45R18	XL	100T	TSMI 12	130	7.5 - 9.0	8.0	26.7	677	9.6	781	11	28.0	1764	50
	28384811	245/60R18	SL	105T	TSMI 13	130	7.0 - 8.5	7.0	29.6	751	9.8	713	11	34.3	2039	44
	28384854	265/60R18	XL	114T	TSMI 13	130	7.5 - 9.5	8.0	30.6	776	10.7	694	12	39.0	2601	50
	28152901	275/65R18	SL	116T	TSMI 13	130	7.5 - 9.5	8.0	32.1	816	11.0	661	12	46.0	2756	44
19"	28384957	225/55R19	XL	103T	TSMI 12	130	6.0 - 8.0	7.0	28.9	734	9.2	728	11	31.1	1929	50
	28384406	235/40R19	XL	96T	TSMI 12	130	8.0 - 9.5	8.5	26.4	671	9.4	785	11	28.2	1565	50
	28152970	235/55R19	XL	105T	TSMI 12	130	6.5 - 8.5	7.5	29.3	743	9.6	719	11	34.0	2039	50
20"	28384989	255/45R19	XL	104T	TSMI 12	130	8.0 - 9.5	8.5	28.2	716	10.0	739	12	32.4	1984	50
	28384888	255/40R20	XL	101T	TSMI 12	130	8.5 - 10.0	9.0	28.0	711	10.1	740	12	30.6	1819	50
	28152946	255/50R20	XL	109T	TSMI 13	130	7.0 - 9.0	8.0	30.1	764	10.3	698	11	37.0	2271	50
	28152950	255/55R20	XL	110T	TSMI 13	130	7.0 - 9.0	8.0	31.1	790	10.4	678	12	38.0	2337	50
	28152021	275/55R20	XL	117T	TSMI 13	130	7.5 - 9.5	8.5	32.0	812	11.2	660	12	47.0	2833	50
	28152003	275/60R20	SL	115T	TSMI 13	130	7.5 - 9.5	8.0	33.0	839	11.0	641	12	48.5	2679	44



EUROWINTER HS01

HIGH PERFORMANCE WINTER CAPABILITY

- Studless Winter Tire Delivering Exceptional Winter Handling
- Confident Grip and Predictable Performance
- Excellent Traction in Unpredictable Weather
- Enhanced Wet Braking
- HS01 SUV Designed for Sport Utility Vehicles

AVAILABLE IN
44 SIZES

RIM SIZING
16"- 21"

SPEED RATING
V / W



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.
†Designed to offer today's highly-capable SUVs and CUVs the winter performance they demand.




PASSENGER CAR



SUV | CUV

PERFORMANCE RATINGS

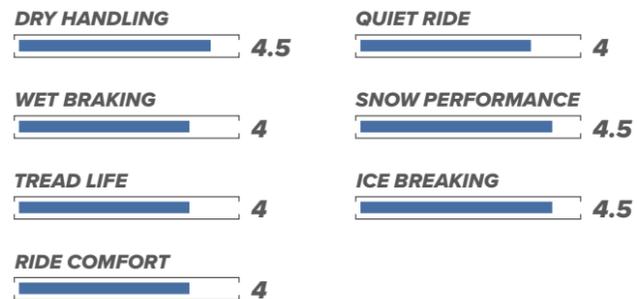

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category. †Performance results are based on internal testing results. Individual results may vary depending on vehicle type, tire maintenance, driving style and road conditions.

POPULAR VEHICLE FITMENTS

- | | |
|----------------|-------------------|
| AUDI A4 | MERCEDES-BENZ GLE |
| AUDI Q7 | PORSCHE CAYENNE |
| BMW 3/4 SERIES | PORSCHE MACAN |
| BMW X5 | TESLA MODEL 3 |
| LEXUS IS | TESLA MODEL S |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS

4D NANO DESIGN TECHNOLOGY was used to engineer a tread compound that adapts to varying weather conditions, providing strong dry performance while remaining flexible.

CENTRAL TRANSVERSE GROOVES that expand into wide shoulder openings efficiently disperse water away from the center of the tread, ensuring improved wet weather grip.

3D CANYON SIPE TECHNOLOGY allows for more sipes across the surface of the tire, delivering superior traction in winter weather without compromising vehicle handling and stability.

AGGRESSIVE UNIDIRECTIONAL TREAD PATTERN designed with 3D Canyon Sipes and directional arches provides the HS01 with superior snow traction when compared to its predecessor.

EUROWINTER HS01

LEARN MORE



EUROWINTER HS01

HIGH PERFORMANCE WINTER CAPABILITY

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
16"	28522483	205/55R16	XL	94V	5.5 - 7.5	6.5	25.2	8.5	837	11	20.5	1477	50
	28522781	205/45R17	XL	88V	6.5 - 7.5	7.0	24.4	8.1	850	11	19.6	1235	50
17"	28522770	205/50R17	XL	93V	5.5 - 7.5	6.5	25.4	8.5	827	11	22.9	1433	50
	28522792	215/45R17	XL	91V	7.0 - 8.0	7.0	24.8	8.5	837	11	21.8	1356	50
	28522795	225/45R17	XL	94V	7.0 - 8.5	7.5	25.1	8.9	828	11	23.8	1477	50
	28522772	225/50R17	XL	98V	6.0 - 8.0	7.0	26.2	9.3	803	11	27.1	1653	50
	28522762	225/55R17	XL	101V	6.0 - 8.0	7.0	27.1	9.3	780	11	27.8	1819	50
	28522794	235/45R17	XL	97V	7.5 - 9.0	8.0	25.5	9.4	818	12	24.7	1609	50
	28522784	245/45R17	XL	99V	7.5 - 9.0	8.0	25.9	9.7	809	12	27.3	1709	50
	18"	28523892	225/40R18	XL	92W	7.5 - 9.0	8.0	25.3	9.1	821	11	22.5	1389
28522824		225/45R18	XL	95V	7.0 - 8.5	7.5	26.1	8.9	797	11	23.8	1521	50
28522893		235/40R18	XL	95V	8.0 - 9.5	8.5	25.6	9.6	811	11	25.3	1521	50
28522895		235/45R18	XL	98V	7.5 - 9.0	8.0	26.5	9.4	785	12	26.7	1653	50
28522825		235/50R18	XL	101V	6.5 - 8.5	7.5	27.6	9.8	763	12	30.2	1819	50
28522894		245/40R18	XL	97V	8.0 - 9.5	8.5	25.9	9.9	802	12	26.2	1609	50
28522865		245/45R18	XL	100V	7.5 - 9.0	8.0	26.8	9.7	777	12	28.2	1764	50
28522820		245/50R18	XL	104V	7.0 - 8.5	7.5	28.0	10.1	753	12	31.1	1984	50
28522863		245/55R18	SL	103V	7.0 - 8.5	7.5	28.9	10.1	730	11	29.8	1929	51
28523844		255/40R18	XL	99W	8.5 - 10.0	9.0	26.2	10.4	794	12	26.0	1709	50
28522866	255/45R18	XL	103V	8.0 - 9.5	8.5	27.3	10.2	766	12	29.8	1929	50	

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
19"	28522971	225/40R19	XL	93V	7.5 - 9.0	8.0	26.3	9.1	788	11	24.9	1433	50
	28522937	225/45R19	SL	92V	7.0 - 8.5	7.5	27.1	8.9	766	11	25.8	1389	51
	28523983	235/35R19	XL	91W	8.0 - 9.5	8.5	25.7	9.6	806	11	25.1	1356	50
	28522970	235/55R19	XL	105V	6.5 - 8.5	7.5	29.5	9.8	715	12	32.6	2039	50
	28522974	245/40R19	XL	98V	8.0 - 9.5	8.5	26.9	9.9	771	12	27.8	1653	50
	28522904	245/45R19	XL	102V	7.5 - 9.0	8.0	27.9	9.7	747	12	30.2	1874	50
	28522996	255/40R19	XL	100V	8.5 - 10.0	9.0	27.3	10.4	763	12	29.8	1764	50
20"	28523002	245/40R20	XL	99W	8.0 - 9.5	8.5	27.9	9.9	744	12	28.9	1709	50
	28523001	255/35R20	XL	97W	8.5 - 10.0	9.0	27.2	10.4	760	12	29.3	1609	50
	28522270	255/40R20	XL	101V	8.5 - 10.0	9.0	28.2	10.4	736	11	31.5	1819	50
21"	28523271	245/35R21	XL	96W	8.0 - 9.5	8.5	28.0	9.9	739	11	28.7	1565	50
EUROWINTER HS01 SUV / CUV SIZES													
18"	28532889	225/55R18	XL	102V	6.0 - 8.0	7.0	28.1	9.1	750	12	29.8	1874	50
	28532826	225/60R18	XL	104V	6.0 - 8.0	6.5	28.9	8.8	729	12	29.1	1984	50
	28532845	255/55R18	XL	109V	7.0 - 9.0	8.0	29.3	10.4	721	12	35.3	2271	50
19"	28532110	235/50R19	XL	103V	6.5 - 8.5	7.5	28.6	9.6	735	12	32.9	1929	50
	28532949	255/50R19	XL	107V	7.0 - 9.0	8.0	29.4	10.4	718	12	36.2	2149	50
	28532943	255/55R19	XL	111V	7.0 - 9.0	8.0	30.3	10.4	696	12	35.9	2403	50
	28532526	265/50R19	XL	110V	7.5 - 9.5	8.5	30.0	10.8	704	12	36.2	2337	50
20"	28532013	255/45R20	XL	105V	8.0 - 9.5	8.5	29.4	10.0	710	12	35.5	2039	50
	28532947	275/40R20	XL	106V	9.0 - 11.0	9.5	29.0	10.9	717	13	36.2	2094	50
	28532016	275/45R20	XL	110V	8.5 - 10.5	9.0	30.1	10.7	692	13	38.1	2337	50
	28532242	295/40R20	XL	110V	10.0 - 11.5	10.5	29.6	11.8	706	13	39.2	2337	50
	28532018	295/45R20	XL	114V	9.5 - 11.0	10.0	30.6	11.7	684	12	40.1	2601	50
21"	28533232	295/35R21	XL	107W	10.0 - 11.5	10.5	29.3	11.7	710	11	37.7	2149	50

LEARN MORE



ESPIA EPZ II

CONFIDENT WINTER TRACTION



- Designed for the Most Unforgiving Winter Conditions
- Consistent Contact with the Road
- Deep Snow Capability
- Comfortable Ride
- Confident Grip in the Rain

AVAILABLE IN
26 SIZES


RIM SIZING
14"- 18"

SPEED RATING
T



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.

PERFORMANCE RATINGS

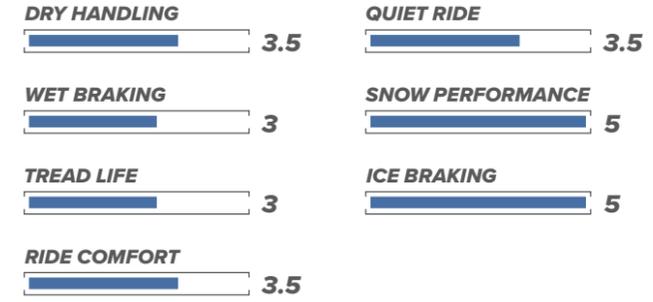

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-----------------|-------------------|
| AUDI A3 | KIA SOUL |
| CHEVROLET CRUZE | NISSAN ALTIMA |
| FORD FUSION | TOYOTA COROLLA |
| HONDA CIVIC | TOYOTA PRIUS |
| HYUNDAI ELANTRA | VOLKSWAGEN PASSAT |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



TIRE HIGHLIGHTS

HIGH-DENSITY SIPES
move water and snow away from the tread surface for continuous road connection with over 13,000 millimeters in edges added from its predecessor.

WIDE LATERAL GROOVES
work together with wide pockets to allow more snow to pack into the tread, clearing the road surface quicker for increased snow traction.

STRATEGIC RIB PLACEMENT
with larger outer-edge block-style ribs provide a comfortable and stable drive while maneuvering the vehicle, no matter the road-surface condition.

WIDE CIRCUMFERENTIAL GROOVES
channel water away from the tread for consistent contact with the road surface, increasing wet traction and driver confidence.

LEARN MORE



ESPIA EPZ II

ESPIA EPZ II

CONFIDENT WINTER TRACTION

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
14"	28314442	175/65R14	XL	86T	5.0 - 6.0	5.0	23.0	7.0	918	11	16.3	1168	50
	28314443	185/65R14	XL	90T	5.0 - 6.5	5.5	23.5	7.4	905	11	17.6	1323	50
15"	28314563	175/65R15	XL	88T	5.0 - 6.0	5.0	24.0	7.0	783	11	17.6	1235	50
	28314516	185/60R15	XL	88T	5.0 - 6.5	5.5	23.9	7.4	883	11	17.9	1235	50
	28314542	185/65R15	XL	92T	5.0 - 6.5	5.5	24.5	7.4	865	11	18.5	1389	50
	28314551	195/60R15	XL	92T	5.5 - 7.0	6.0	24.3	7.9	868	11	19.6	1389	50
	28314543	195/65R15	XL	95T	5.5 - 7.0	6.0	25.0	7.9	848	11	20.3	1521	50
	28314544	205/65R15	XL	99T	5.5 - 7.5	6.0	25.5	8.2	832	12	22.9	1709	50
	28314477	215/70R15	SL	98T	5.5 - 7.0	6.5	27.1	8.7	877	12	26.0	1653	44
16"	28314483	205/55R16	XL	94T	5.5 - 7.5	6.5	25.0	8.4	842	12	24.5	1477	50
	28314652	205/60R16	XL	96T	5.5 - 7.5	6.0	25.8	8.2	818	12	23.6	1565	50
	28314626	205/65R16	SL	95T	5.5 - 7.5	6.0	26.5	8.2	800	12	23.8	1521	44
	28317662	215/55R16	XL	97R	6.0 - 7.0	7.0	25.4	8.8	834	12	24.7	1609	50
	28314479	215/60R16	XL	99T	6.0 - 7.5	6.5	26.3	8.7	805	12	25.6	1709	50
	28314681	215/65R16	SL	98T	6.0 - 7.5	6.5	27.0	8.7	786	12	24.9	1653	44
	28314480	225/60R16	XL	102T	6.0 - 8.0	6.5	26.7	9.0	793	12	26.7	1874	50
28314673	225/65R16	SL	100T	6.0 - 8.0	6.5	27.5	9.0	771	12	27.6	1764	44	

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
17"	28317771	215/50R17	XL	95R	6.0 - 8.0	7.0	25.7	8.6	823	12	24.2	1521	50
	28314727	215/55R17	XL	98T	6.0 - 7.5	7.0	26.5	8.9	798	12	25.1	1653	50
	28314795	225/45R17	XL	94T	7.0 - 8.5	7.5	25.2	8.9	826	12	24.5	1477	50
	28314772	225/50R17	XL	98T	6.0 - 8.0	7.0	26.1	9.2	808	12	26.0	1653	50
	28314762	225/55R17	XL	101T	6.0 - 8.0	7.0	26.9	9.2	783	12	26.9	1819	50
	28314725	235/55R17	SL	99T	6.5 - 8.5	7.5	27.3	9.6	778	12	28.2	1709	44
18"	28314892	225/40R18	XL	92T	7.5 - 9.0	8.0	25.1	9.1	826	12	24.3	1389	50
	28314824	225/45R18	XL	95T	7.0 - 8.5	7.5	26.1	8.9	803	12	26.2	1521	50
	28314825	235/50R18	XL	101T	6.5 - 8.5	7.5	27.5	9.6	769	12	29.0	1819	50

LEARN MORE





ESPIA EPZ II SUV

CONFIDENT WINTER PERFORMANCE DESIGNED FOR SUVs



- Excellent Ice Traction for Sport Utility Vehicles
- Superb Wet Weather Performance
- Consistent Contact with the Road
- Confident Grip in the Rain
- Specifically Designed for SUVs

AVAILABLE IN
15 SIZES


RIM SIZING
16"- 20"

SPEED RATING
R / T



*This tire is designed for severe snow conditions and meets the USTMA and TRAC snow traction performance requirements.

PERFORMANCE RATINGS

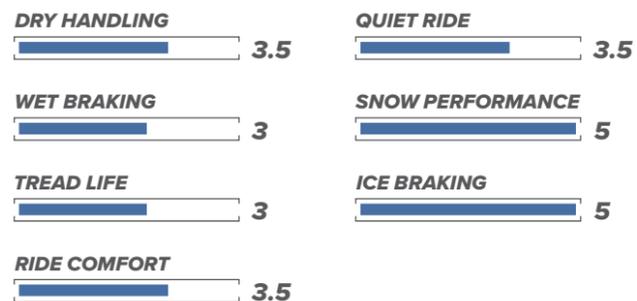

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

POPULAR VEHICLE FITMENTS

- | | |
|-------------------|---------------------|
| ACURA MDX | JEEP GRAND CHEROKEE |
| CHEVROLET EQUINOX | JEEP PATRIOT |
| CHEVROLET TAHOE | KIA SORENTO |
| FORD ESCAPE | LEXUS RX |
| HONDA PILOT | SUBARU FORESTER |



Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

TIRE HIGHLIGHTS



DIRECTIONAL TREAD DESIGN was designed for wet weather performance, improving hydroplane resistance by quickly dispersing water.



HIGH DENSITY SIPES move water and snow away from the tread surface creating biting edges for continuous road connection.



TREAD SURFACE ETCHING provides slip resistant contact for excellent ice traction and braking performance during severe winter conditions.



WIDE CIRCUMFERENTIAL GROOVES channel water away from the tread for consistent contact with the road surface, increasing wet traction and driver confidence.

LEARN MORE



ESPIA EPZ II SUV

ESPIA EPZ II SUV

CONFIDENT WINTER PERFORMANCE DESIGNED FOR SUVs

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
16"	28409969	215/70R16	SL	100R	5.5 - 7.0	6.5	27.8	8.7	757	14	29.0	1764	44
17"	28404905	215/65R17	SL	99R	6.0 - 7.5	6.5	28.2	8.6	751	14	27.0	1709	44
	28407747	225/60R17	SL	99R	6.0 - 8.0	6.5	27.7	8.6	761	14	30.9	1709	44
	28409020	225/65R17	SL	102R	6.0 - 8.0	6.5	28.5	8.9	744	14	31.0	1874	44
	28402960	235/60R17	SL	102R	6.5 - 8.5	7.0	28.1	9.3	751	14	33.5	1874	44
	28408092	235/65R17	XL	108R	6.5 - 8.5	7.0	29.2	9.3	729	14	34.8	2205	50
	28401905	265/70R17	SL	115R	7.0 - 9.0	8.0	31.5	10.9	672	14	43.0	2679	44

Wheel Dia.	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)
18"	28401235	225/60R18	SL	100R	6.0 - 8.0	6.5	28.6	8.8	738	14	31.0	1764	44
	28401449	235/55R18	SL	100R	6.5 - 8.5	7.5	28.2	9.6	747	14	32.0	1764	44
	28403995	235/60R18	XL	107R	6.5 - 8.5	7.0	29.2	9.2	725	14	35.3	2149	50
	28317815	235/65R18	SL	106R	6.5 - 8.5	7.0	30.1	9.6	703	14	35.1	2094	44
	28314811	245/60R18	SL	105T	7.0 - 8.5	7.0	29.6	9.9	716	14	35.5	2039	44
	28405731	255/55R18	XL	109R	7.0 - 9.0	8.0	29.1	10.2	728	14	41.0	2271	50
19"	28317970	235/55R19	XL	105R	6.5 - 8.5	7.5	29.2	9.7	720	14	33.5	2039	50
20"	28404196	275/55R20	SL	113R	7.5 - 9.5	8.5	32.0	11.1	661	14	46.0	2535	44



ORIGINAL EQUIPMENT



AZENIS FK001 A/S

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2021+ Toyota Mirai	59000750	245/45ZR20	XL	103Y	7.5 - 9.0	8.5	28.7	9.9	749	10	31.1	1929	50	500-A-A



AZENIS FK510A SUV

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2019+ Porsche Macan (Front)	59000630	235/60R18	SL	103W	6.5 - 8.5	8.0	29.2	10.0	709	10	29.3	1929	51	300-A-A
2019+ Porsche Macan (Rear)	59000640	255/55R18	SL	105W	7.0 - 9.0	9.0	28.9	11.1	716	10	32.0	2039	51	300-A-A



SINCERA SN250A A/S

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2018+ Mitsubishi Eclipse Cross	59000410	P215/70R16	SL	99H	5.5 - 7.0	6.5	28.0	8.9	747	10	24.2	1709	51	320-B-A
2021+ Mitsubishi Mirage	59000730	165/65R14	SL	79S	4.5 - 6.0	4.5	22.4	6.4	735	9	13.0	963	51	320-B-B
2017+ Nissan Rogue Sport	59000280	215/60R17	SL	96H	6.0 - 7.5	7.0	27.1	8.8	774	10	24.7	1565	51	320-A-A
2019+ Nissan Altima	59000290	215/60R16	SL	95H	6.0 - 7.5	7.0	26.2	8.9	798	9	21.1	1521	51	320-A-A



WILDPEAK A/T3W

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2021+ Ford Bronco Sport	59000690	235/65R17	SL	104H	6.5 - 8.5	7.0	29.1	9.6	721	13	31.1	1984	51	600-B-A
2021+ Ford Maverick	59000690	235/65R17	SL	104H	6.5 - 8.5	7.0	29.1	9.6	721	13	31.1	1984	51	600-B-A
2020+ Jeep Gladiator Rubicon	59000350	LT285/70R17	C	116/113Q	7.5 - 9.0	8.5	32.8	11.2	634	18	63.7	2755 / 2535	50	-
2024+ Jeep Compass TrailHawk	59000890	215/65R17	SL	99T	6.0 - 7.5	6.5	28.0	8.7	756	12	32.2	1709	51	660-B-B
2024+ Toyota Tacoma TRD Off-Road	59000710	265/70R18	SL	116T	7.0 - 9.0	8.0	32.8	10.9	633	9	37.9	2756	51	500-A-B
2024+ Toyota 4Runner TRD Off-Road	59000710	265/70R18	SL	116T	7.0 - 9.0	8.0	32.8	10.9	633	9	37.9	2756	51	500-A-B
2022+ Toyota Tundra TRD PRO	59000770	285/65R18	SL	116T	8.0 - 10.0	8.0	32.6	11.5	642	10	42.1	2756	51	500-A-B



WILDPEAK A/T3WA

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Sidewall Lettering	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revs Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2024+ Mercedes Benz G-Class	59000470	265/60R18	SL	110H	BSW	7.5 - 9.5	8.0	30.6	10.3	694	13	40.2	2337	51	500-B-A
2019+ RAM 1500 (4x4 Off-Road & North Edition, 3PMSF)	59000570	LT275/65R18	LRC	113/110S	OWL	7.5 - 9.5	8.0	32.1	11.1	648	15	48.9	2535	50	-
2019+ RAM 1500 (4x4 Off-Road & North Edition, 3PMSF)	59000860	275/55R20	SL	113T	BSW	7.5 - 9.5	8.5	32.0	11.3	653	14	45.3	2535	51	500-B-B
2019+ RAM 1500 (4x4 Off-Road & North Edition, 3PMSF)	59000940	285/45R22	XL	114H	BSW	9.0 - 10.5	9.5	32.0	11.0	650	11	38.2	2601	50	360-B-A
2022+ Toyota Tundra TRD Off-Road	59000780	265/60R20	SL	112H	BSW	7.5 - 9.5	8.0	32.5	10.7	639	9	37.9	2469	51	500-A-A
2024+ Toyota Sequoia TRD Off-Road	59000780	265/60R20	SL	112H	BSW	7.5 - 9.5	8.0	32.5	10.7	639	9	37.9	2469	51	500-A-A



WILDPEAK A/T TRAIL

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2022+ Mazda CX-50	59000870	225/60R18	SL	100H	6.0 - 8.0	8.0	28.7	9.6	725	11	30.2	1764	51	680-A-A
2024+ Nissan Rogue Rock Creek	59000990	235/65R17	SL	104H	6.5 - 8.5	7.5	29.1	9.8	715	11	31.7	1984	51	360-B-A



WILDPEAK A/T TRAIL 01A

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2020+ Toyota RAV4 (TRD)	59000530	225/60R18	SL	100H	6.0 - 8.0	6.5	28.6	9.0	726	10	26.9	1763	51	360-B-A



WILDPEAK M/T

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2020+ Jeep Gladiator Rubicon	59000360	LT285/70R17	LRC	116/113Q	7.5 - 9.0	8.5	32.8	11.0	623	18	61.3	2755/2535	50	-
2019+ Jeep Wrangler Rubicon	59000360	LT285/70R17	LRC	116/113Q	7.5 - 9.0	8.5	32.8	11.0	623	18	61.3	2755/2535	50	-



ZIEX CT60 A/S

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2022 Alfa Romeo Tonale	59000980	P225/45R19	XL	99V	7.5 - 9.0	8.0	27.4	9.4	762	11	27.4	1709	50	680-A-A
2024+ Jeep Wagoneer S	59000910	235/50R20	XL	104H	6.5 - 8.5	7.5	29.4	10.1	707	10	28.9	1984	50	660-B-A
2023+ Mazda CX-90	59000960*	275/45R21	SL	107W	8.5 - 10.5	9.5	30.9	11.0	668	9	31.5	2149	51	300-A-A
2023+ Mazda CX-70	59000960*	275/45R21	SL	107W	8.5 - 10.5	9.5	30.9	11.0	668	9	31.5	2149	51	300-A-A
2023+ Mazda CX-90	59000970**	275/45R21	XL	110W	8.5 - 10.5	9.5	30.9	11.0	669	9	32.0	2337	50	300-A-A

*ZIEX CT60A A/S
*Features Silent Core



ZIEX ZE001 A/S

Model / Make	Item Number	Tire Size	Load ID	Service Desc.	Approved Rim Width (in)	Measuring Rim (in)	Overall Diameter (in)	Overall Width (in)	Revolutions Per Mile	Tread Depth (/32in)	Tire Weight (lbs)	Max Load (lbs)	Max Pressure (psi cold)	U.T.Q.G.
2018+ Mazda 6	59000440	P225/45R19	SL	92W	7.0 - 8.5	7.5	27.0	9.0	769	10	23.8	1389	51	360-A-A
2022+ Mazda MX-30	59000740**	215/55R18	SL	95H	6.0 - 7.5	7.0	27.4	9.0	758	10	21.8	1521	51	360-B-A
2021+ Mitsubishi Outlander	59000760**	P235/60R18	SL	102H	6.5 - 8.5	7.0	29.1	9.6	720	10	26.4	1874	51	360-A-A
2021+ Nissan Rogue	59000590	235/60R18	SL	103H	6.5 - 8.5	7.5	29.1	9.8	714	8	25.2	1929	51	360-B-A
2019+ Subaru Ascent	59000920	245/60R18	SL	105H	7.0 - 8.5	7.5	29.6	9.9	702	10	29.5	2039	51	360-B-A
2019+ Subaru Ascent	59000930	245/50R20	SL	102H	7.0 - 8.5	7.5	29.8	9.8	697	10	29.8	1874	51	360-B-A
2018-2022 Subaru Crosstrek	59000330	225/55R18	SL	98H	6.0 - 8.0	7.0	27.9	9.1	758	10	24.3	1653	51	360-A-A
2019+ Subaru Forester	59000550	225/55R18	SL	98H	6.0 - 8.0	7.0	27.8	9.0	747	10	24.9	1653	51	360-A-A
2023+ Subaru Crosstrek	59000790	225/55R18	SL	98H	6.0 - 8.0	7.0	27.7	9.1	750	9	23.4	1653	51	360-A-A
2023+ Subaru Forester	59000790	225/55R18	SL	98H	6.0 - 8.0	7.0	27.7	9.1	750	9	23.4	1653	51	360-A-A
2021+ Toyota Sienna	59000610**	P235/65R17	SL	103T	6.5 - 8.5	7.0	28.8	9.3	715	10	37.1	1929	51	380-B-B

**ZIEX ZE001A A/S

LEARN MORE



FALKEN TIRES LIMITED WARRANTY

Effective January 1, 2025

I. Tires Covered by this Warranty:

This limited warranty applies to FALKEN brand steel-belted radial passenger car and selected light truck tires bearing the complete description and serial number as required by the DOT. This warranty applies to all Falken branded PCR & LTR products stamped with a 2025 production date or newer. Tires produced before 2025 are subject to previously published warranties. This warranty is effective only to tires for which claims are made within six years of date of production, based on the tire DOT serial number.

II. What is Warranted and for How Long:

A. Material and Workmanship Warranty:

- Every FALKEN brand radial tire is warranted against defects in material and workmanship for the usable life of the original tread within six years of date of production (for 2025 produced and newer) based on the tire DOT serial number. The usable life of the original tread ends at the appearance of the treadwear indicators at 2/32" (1.6mm) remaining tread depth.
- If a tire becomes unserviceable due to such defect within the first 2/32" (1.6mm) of wear, it will be replaced free of charge with a comparable FALKEN tire.
- After the first 2/32" (1.6mm) wear, a prorated adjustment credit to the customer will be given based on the percentage of remaining usable tread depth, down to the remaining 2/32" (1.6mm) wear bars, at which point no credit is due.
- OUT-OF-ROUND or OUT-OF-BALANCE claims will be accepted for adjustment only during the first 2/32" (1.6mm) of the original tread depth, and tires will be replaced free of charge with comparable FALKEN tires. A set of four (4) tires from the same vehicle will not be accepted for out-of-round or out-of-balance claims.

B. Limited Tread Life Warranty:

Most FALKEN brand tires come with a tread life warranty. Prorated adjustment credit will be given based on percentage of mileage not achieved on tires.

FALKEN brand radial tires listed below are warranted to achieve the following mileages before becoming worn out at 2/32" (1.6mm) remaining tread depth:

Passenger Car Tires:	Miles / km
SINCERA SN201 A/S (All Sizes).....	65,000 / 105,000
SINCERA SN250 A/S (Speed Ratings H, V).....	75,000 / 120,000
SINCERA SN250 A/S (Speed Rating T).....	80,000 / 130,000
ZIEX ZE950 A/S (600-A-A UTQG/H&V Rated).....	65,000 / 105,000
ZIEX ZE950 A/S (500-A-A UTQG/W Rated).....	45,000 / 70,000
ZIEX ZE960 A/S (Speed Ratings H, V).....	65,000 / 105,000
ZIEX ZE960 A/S (Speed Rating W).....	45,000 / 70,000
AKLIMATE.....	65,000 / 105,000
AZENIS FK460 A/S (All Sizes).....	50,000 / 80,000
AZENIS RT660, RT660+, RT615K+, FK510.....	No Tread Life Warranty
ESPIA EPZ II, EUROWINTER H501, WINTERPEAK F-ICE 1.....	No Tread Life Warranty

Light Truck, SUV and CUV Tires:

RUBITREK A/T (All Sizes).....	55,000 / 90,000
WILDPEAK A/T4W (Non-LT Sizes).....	65,000 / 105,000
WILDPEAK A/T4W (LT Sizes).....	60,000 / 95,000
WILDPEAK A/T3W (All Sizes).....	55,000 / 90,000
WILDPEAK A/T TRAIL (All Sizes).....	65,000 / 105,000
WILDPEAK H/T (All Sizes).....	60,000 / 95,000
WILDPEAK H/T02 (Non-LT Sizes).....	70,000 / 115,000
WILDPEAK H/T02 (LT Sizes).....	50,000 / 80,000
WILDPEAK R/T (All Sizes).....	50,000 / 80,000
ZIEX S/TZ05 (All Sizes).....	50,000 / 80,000
ZIEX CT60 A/S (All Sizes).....	65,000 / 105,000
WILDPEAK M/T.....	No Tread Life Warranty
ESPIA EPZ II SUV.....	No Tread Life Warranty

This tread life warranty is applicable only for normal highway use when all of the owner's obligations listed below in Section IV are met. Warranty does not apply to any FALKEN designs not listed.

- All eligible tread life warranty claims are based on the tire being worn down evenly to the wear bars at 2/32" (1.6mm).
- Any tire with measured tread difference of 2/32" (1.6mm) or more across the tread (main circumferential tread grooves) will be considered irregularly worn and rejected.
- Any tires submitted with 5/32" (4.0mm) or more remaining tread depths will be rejected for tread life warranty claim.
- Any tires submitted with 3/32" to 4/32" (2.4mm–3.2mm) remaining mileage and tread depth to be achieved will be projected and prorated as if the tire was worn down to 2/32" (1.6mm).
- Some vehicles come from the manufacturer with "split fitments" (or a staggered setup), which refers to different tire sizes being used on the front and rear axles. Since these tires cannot be rotated in the traditional manner, the warranty on the rear axle tires will drop to 50% of the standard mileage warranty for the applicable tread design.
- All submitted mileage claims are to include proof of tire rotation; either copy of warranty card with completed rotations listed, or copies of the customer's invoice showing rotation mileage and vehicle information will be accepted.

III. What is Not Covered (Exclusions):

- Unserviceability due to road hazard damages (cuts, snags, punctures, bruises, impact breaks, etc.), improper repair technique or materials, improper inflation, overload, irregular wear, wheel imbalance, defective vehicle mechanical components (brakes, suspension, wheels, etc.), improper suspension alignment, accident, fire, acts of God, chemical damage, damage from chain use, racing, off-road use, runflat, improper installation, vandalism, or abuse.
- Tires on any vehicle registered and normally used outside the 50 United States, Puerto Rico, and Canada.
- Tires branded "NA" or having the DOT number removed.
- Tires presented for warranty claim by someone other than the original purchaser, or tires that were transferred to another vehicle from the one upon which they were originally installed, regardless of by whom. This warranty is not transferable.
- Any tires whose failure is caused by any previous damages or repairs.
- Any cost of tire repair or retreading is not covered by this warranty and will be solely borne by the tire owner.
- The tread life warranty is not applicable if tires are used in commercial service or, determined at our discretion, have premature or irregular wear due to abusive service or defective vehicle conditions. Abusive service includes off-road use, excessive mountain road driving, racing, or passenger car tires on pick-up, RV, or utility vehicles.
- Tires that have tread siping or otherwise modified from the original design.
- Tires that are worn beyond the last two thirty-seconds of an inch (2/32"/1.6mm) of original tread depth. Beyond this point, the tire is considered worn out and has delivered its usable tread life and there is no manufacturer's warranty regardless of its age or mileage.

IV. Owners Obligations:

At the time of purchase, the tire(s) must be properly installed, balanced, and air pressure set to the vehicle manufacturer's specifications if original equipment size, or at an air pressure adequate to carry the vehicle load if a different replacement size. At least monthly, owner must check tire air pressure with a gauge and inflate to recommended cold PSI level. Do not rely on car servicers to perform the checks. Tires must be rotated at least every 5,000 miles, or earlier if unequal wear is occurring, and proof of compliance must be recorded on the warranty card. Owner must have tires rebalanced if vibration is experienced, and alignment must be checked if unequal or rapid wear is occurring, or when scheduled by the vehicle maker. All warranty claims must be presented to an authorized FALKEN dealer. Tire owners must present their warranty card verifying mileage, proof of date and place of purchase, to make a tread life warranty claim. The name of the FALKEN dealer from whom the tires were purchased must be included on the form.

V. DISCLAIMER:

ALL IMPLIED WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED IN DURATION TO THE ABOVE PERIOD. TO THE EXTENT PERMITTED BY LAW, FALKEN TIRES SHALL NOT BE RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SUCH AS LOSS OF USE OF THE TIRE OR THE VEHICLE ON WHICH IT IS USED, INCONVENIENCE, OR COMMERCIAL LOSS. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE. THIS IS THE ONLY EXPRESS WARRANTY APPLICABLE TO FALKEN BRAND TIRES, AND SUPERSEDES THE TERMS OF ANY PREVIOUS WARRANTY. FALKEN NEITHER ASSUMES NOR AUTHORIZES ANYONE TO MAKE OR ASSUME FOR IT ANY OTHER WARRANTY.

WARRANTY ADJUSTMENT POLICY AND PROCEDURES

Effective January 1, 2025

Tires sold by SUMITOMO RUBBER NORTH AMERICA, INC. (dba) FALKEN TIRE CORPORATION ("FTC") may be submitted for warranty adjustment by dealers only within six (6) years from the DOT number date (for 2025 produced and newer) of production, using the following guidelines.

Claim Forms:

Each tire submitted by dealers must be listed on and accompanied by an FTC Warranty Adjustment Claim Form. Up to ten tires may be reported per form. Forms are serial numbered for control and later credit memo reference, and must not be copied for multiple use. Tires received by FTC without claim forms will not be processed for adjustment. Call 800-723-2553 or contact your FTC sales representative to request forms.

After fully completing the form with all required information, send the original white form in an envelope taped to one of the tires, with the shipment to the FTC warehouse shown on the next page that services your area. Detach and keep the yellow copy for your records.

Tire Claim Number and Damage Marking:

Each tire must be clearly marked with tire crayon or grease pen with the claim form serial and line number that relates to that tire. (Example "525806-1" for claim form 525806, line 1). If the FTC inspector has trouble identifying a claim, processing delay of your credit may occur.

If possible mark the site of the damage or problem area with chalk. If FTC cannot find the problem, you may not get the credit you are seeking.

Returning Warranty Tires to FTC Warehouses:

Dealer or Distributor locations with warranty return tires must contact their servicing FTC Warehouse Manager for return approval and shipping instructions.

Locations within FTC's local delivery areas may have warranty adjustment tires picked up by FTC trucks if so serviced, or you may bring the tires to the warehouse when will-calling an order. In any case, customers must contact their servicing FTC warehouse Manager for approval before making a return.

Customers may also ship adjustment tires to their servicing FTC warehouse. FTC must authorize all returns prior to shipment. **Freight collect shipments without prior authorization will not be accepted.**

On shipping documents identify the cargo as: "Class 60 – Scrap Tire Having No Value".

FTC will pay freight cost on all adjustment tires subject to the following limitations:

(a) Shipments of 1,000 lbs. or more	Freight Prepaid
(b) Shipments of less than 1,000 lbs.	One (1) freight prepaid shipment every 60 days per location.

For general estimation purposes, the following weights may be used in load calculations:
 Passenger – 20 lbs. each Light Truck – 45 lbs. each Medium Truck – 100 lbs. each

WARRANTY ADJUSTMENT PERCENTAGE CALCULATION

For tread life warranty, calculate the miles received divided by the warranty level, then subtract 1. This will give you percentage credit due to customer.

Use the chart and data below to calculate the credit due to customers presenting tires for workmanship / materials warranty claim consideration. The chart is based on a standard wear-out depth of 2/32" (1.6mm), when the wear bars appear, and the legal wear limit in most states.

Charge the customer the replacement tire price minus the percentage shown below. The percentages have been rounded to the nearest whole number. If you wish, the exact percentage can be calculated using the following formula:

$$ADJ\% = (\text{measured tread depth} - 2/32) \text{ divided by } (\text{original depth} - 2/32)$$

Example: A tire with original depth of 11/32" is worn to 6/32" remaining.
 The calculation is: (6-2) / (11-2) = 4 / 9 = 0.444, or 44.4% (chart shows 44%)

Adjustment Percentage Due to Customer at 2/32" (1.6mm) wear-out.

Original Depth (in)	Measured Depth Remaining in Tire Grooves (in)																			
	21/32	20/32	19/32	18/32	17/32	16/32	15/32	14/32	13/32	12/32	11/32	10/32	9/32	8/32	7/32	6/32	5/32	4/32	3/32	2/32
21/32	100%	100%	100%	84%	79%	74%	68%	63%	58%	53%	47%	42%	37%	32%	26%	21%	16%	11%	5%	0%
20/32		100%	100%	100%	83%	78%	72%	67%	61%	56%	50%	44%	39%	33%	28%	22%	17%	11%	6%	0%
19/32			100%	100%	100%	82%	76%	71%	65%	59%	53%	47%	41%	35%	29%	24%	18%	12%	6%	0%
18/32				100%	100%	100%	81%	75%	69%	63%	56%	50%	44%	38%	31%	25%	19%	13%	6%	0%
17/32					100%	100%	100%	80%	73%	67%	60%	53%	47%	40%	33%	27%	20%	13%	7%	0%
16/32						100%	100%	100%	79%	71%	64%	57%	50%	43%	36%	29%	21%	14%	7%	0%
15/32							100%	100%	100%	77%	69%	62%	54%	46%	38%	31%	23%	15%	8%	0%
14/32								100%	100%	100%	75%	67%	58%	50%	42%	33%	25%	17%	8%	0%
13/32									100%	100%	100%	73%	64%	55%	45%	36%	27%	18%	9%	0%
12/32										100%	100%	100%	70%	60%	50%	40%	30%	20%	10%	0%
11/32											100%	100%	100%	67%	56%	44%	33%	22%	11%	0%
10/32												100%	100%	100%	63%	50%	38%	25%	13%	0%
9/32													100%	100%	100%	57%	43%	29%	14%	0%

WARRANTY ADJUSTMENT POLICY AND PROCEDURES (CONTINUED)

Effective January 1, 2025

Dealers in each region must ship warranty adjustment tires to:

Tread Life Warranty Claim Documentation Requirements:

TO RECEIVE PROPER CREDIT FOR ADJUSTMENTS BASED ON PUBLISHED FALKEN TREAD LIFE WARRANTIES, ALL REQUIRED SUPPORTING DOCUMENTATION (I.E., COMPLETED WARRANTY PAMPHLETS AND TIRE ROTATION

WESTERN REGION:

AZ, CA, CO, ID, MT, NM, NV, OR, UT, WA, WY

Falken Tires California Warehouse
13649 Valley Boulevard
Fontana, CA 92335
800-723-2553

Main Menu Option 3, then press 1

CENTRAL/SOUTHERN REGION:

AL, AR, FL, GA, IA, KS, LA, MN, MO, MS, ND,
NE, OK, SD, TX

Falken Tires Texas Warehouse
720 Commerce Park Drive
Grand Prairie, TX 75050
800-723-2553

Main Menu Option 3, then press 4

NORTH/EASTERN REGION:

CT, DE, IL, IN, KY, MA, MD, ME, MI, NC, NH,
NJ, NY, OH, PA, RI, SC, TN, VA, VT, WI, WV

Falken Tires Tennessee Warehouse
1042 Fred White Boulevard
Portland, TN 37148
800-723-2553

Main Menu Option 3, then press 2

SERVICE RECORDS) MUST BE SUBMITTED WITH CLAIM FORMS. CLAIMS RECEIVED WITHOUT DOCUMENTATION MAY BE DEEMED AS NON-ADJUSTABLE AND MAY NOT BE PROCESSED FOR ADJUSTMENT CREDIT.

How Credits Are Calculated:

Warranted failure adjustments credits are prorated based on the amount of usable tread depth remaining on the tire. Tires are deemed worn out at the appearance of the treadwear bars across grooves, at 2/32" (1.6mm) remaining tread depth and no credit will be issued thereafter. Tread life warranty adjustment credits are prorated based on the percentage of unachieved miles divided by the particular model warranted miles. Prorated credit percentage is then calculated based on the dealer's current buying price in our system.

Non-Uniformity Claim Adjustments:

Non-uniformity, including out-of-round or out-of-balance adjustments, will only be accepted during the first 2/32" (1.6mm) treadwear. A claim for non-uniformity for a set of four (4) tires from the same vehicle will not be accepted.

What is Not Considered for Adjustment:

Tires will not be accepted for adjustment credit if they have been previously repaired, have sustained irregular wear due to improper inflation, misalignment, improper vehicle application, have sustained operational abuse, or have been damaged during mounting or demounting.

Non-Adjustable Tire Notification and Returns:

Dealers will be notified in writing of those tires that have been inspected and are not considered for adjustment. Due to limited scrap tire storage space, non-adjustable tires will be destroyed 20 days from the date of dealer notification, unless the dealer had made prior disposition arrangements. Tires requested by the dealer to be returned will be shipped back at dealer expense.

FREE TRIAL RIDE PROGRAM

If for any reason you are not satisfied with your new set of four eligible FALKEN tires within 30 days or 1,000 miles from date of purchase you may return them to the original place of purchase for a full reimbursement (limited to the purchase price of the tires). Please see your FALKEN Dealer for full details.

ROAD HAZARD PROTECTION

The Falken Road Hazard Protection Warranty is designed to instill consumer confidence at the time of purchase. In the unlikely event that a tire becomes damaged due to unforeseen circumstances, the Road Hazard Warranty eases the financial burden on the customer by offering FREE tire replacement through your FALKEN dealer. Some of the most common road hazards include but are not limited to nails, glass, and potholes. See below for full list of what is covered.

The Falken Tires Road Hazard Protection Warranty is valid in the US and Canada only on the following replacement tire product lines: **AKLIMATE, AZENIS FK460 A/S, AZENIS FK510, ESPIA EPZ II, ESPIA EPZ II SUV, EUROWINTER H501, RUBITREK A/T, SINCERA SN201 A/S, SINCERA SN250 A/S, WILDPEAK A/T4W, WILDPEAK A/T3W, WILDPEAK A/T TRAIL, WILDPEAK H/T02, WILDPEAK H/T01, WILDPEAK R/T, WINTERPEAK F-ICE 1, ZIEX CT60 A/S, ZIEX S/TZ05, ZIEX ZE950 A/S, and ZIEX ZE960 A/S.**

Covered Criteria:

- Tire becomes damaged due to road hazard within two (2) years of original purchase date (proof of purchase providing) or within the first 3/32nds wear from original tread depth, whichever comes first.
- If proof of purchase is not provided but within the first 3/32nds wear from original tread depth, warranty is honored if less than two (2) years of age based on the DOT year and week number.
- Tire damage is unrepairable per USTMA puncture repair guidelines.
- Tires purchased new and installed on original vehicle. This warranty is non-transferable.
- Tire needs to be returned to an authorized Falken dealer for inspection.

What is not covered:

The Road Hazard Protection Warranty is intended to aid the consumer in the case of unforeseen circumstances. However, some items are not covered under this warranty as follows:

- Fees including but not limited to mounting, balancing, disposal, valve stems, service fees, or taxes are not covered under this warranty.
- Original Equipment tires are not covered under this warranty.
- Tires transferred to a vehicle other than the vehicle on which they were originally installed are also not covered under this warranty.

The Falken Tires Road Hazard Protection Warranty will not be honored if the tire becomes damaged due to any of the following:

- Abusive usage such as motorsports, racing, commercial use to off-road use.
- Improper tire maintenance, such as incorrect tire inflation pressure, lack of regular rotations.
- Irregular wear and/or improper vehicle alignment or other vehicle related mechanical issues.
- Runlow or Runflat conditions will not be covered unless caused by a Road Hazard.
- Improper installation including but not limited to mounting damage.
- Improper repair due to non-USTMA approved repair process.
- Accident damage due to vehicle collision.
- Fire, theft, natural disaster, or vandalism.
- Use of snow chains

ADDITIONAL SAFETY WARNINGS

Tire Mix Usage: Never mix tires of different size or construction and/or type on an axle, except for temporary use as a spare tire. Always refer to vehicle owner's manual for proper tire fitments.

Winter Tires: FALKEN recommends all four tires be replaced when installing snow tires. Never use just two snow tires – it could lead to adverse handling or loss of control, which could cause serious injury or death.

Speed Rating: The speed capability of the replacement tire(s) must always equal or exceed that of the original equipment tires. FALKEN does not recommend the use of mixing different speed ratings on a vehicle. This can cause poor handling and unpredictable steering. If the tire(s) have been repaired, damaged, or modified from its original condition, then the tire(s) should be treated as a non-speed rated tire.

Tire Repairs: If the interior of the tire, inside and/or outside sidewall are compromised from driving on the flat or underinflated tire for too long, the tire should be replaced. If the tire is deemed repairable after dismounting and inspection of interior is performed, it should be repaired with a plug and patch or plug/patch combination to correctly repair the tire. Never use a rope type plug, as this does not correctly seal the tire, and may lead to tire failure.

For Winter Tires: It is acceptable to use winter tires with a lower speed rating than that of the OE tires, but the vehicle maximum speed must be reduced to correspond with the new tires' speed rating. FALKEN recommends reducing driving speed when driving in adverse weather conditions.

Tire Load: The load carrying capacity of the replacement tire(s) must always equal or exceed the carrying capacity of the original equipment tires. When changing tire sizes – commonly called "Plus Sizing" – please consult the vehicle's tire information placard for original load carrying capacity and air pressures. Always ensure that the replacement tires' load capacity is equal to or above that of the original tire to ensure safe operation.

Tire Aging: FALKEN recommends tires which have been in use for 6 years or more should be inspected regularly by a qualified tire specialist. Plus any tire that is 10 years or older from the date of manufacture, including spare tires should be replaced with new tires regardless of appearance, even if the tires have not reached the legal wear out limit.

Tire Inflation / Overloading: Serious injury or death may result from tire underinflation or overloading. Follow owner's manual and the vehicle's tire information placard for proper inflation pressures and load carrying capacities. Never exceed tire maximum air pressure as listed on tire's sidewall.

Tire Overall Diameter: If you choose a replacement tire that exceeds the vehicle design criteria range for tire diameter, you may be changing the original handling characteristics of the vehicle. In some cases, vehicle systems such as brakes, suspensions and alignment may be affected. On sport utility vehicles (SUV) and light trucks, any increase in tire overall diameter, and the lifting of vehicle suspension to accommodate the larger size, may result in changes of vehicle ride height and resultant changes in rollover characteristics, braking distances, and handling. You must ensure any tire size and suspension changes allow for safe operating control under all driving conditions.

LIGHT TRUCK TIRE LOAD AND INFLATION CHART - FLOTATION TIRE SIZES

Tire Size	Tire Load Limits (lbs.) at Various Inflation Pressures (PSI)																					
	25	30	35	40	45	50	55	60	65	70	75	80										
29x9.50R15LT	1135	-	-	1290	1435	(B)	93	1575	1700	1820	(C)	101	-	-	-	-	-					
30x9.50R15LT	1240	-	-	1410	1565	(B)	96	1715	1855	1985	(C)	104	-	-	-	-	-					
31x10.50R15LT	1400	-	-	1595	1765	(B)	100	1945	2100	2270	(C)	109	-	-	-	-	-					
31x11.50R15LT	1455	-	-	1660	1820	(B)	101	2020	2185	2335	(C)	110	-	-	-	-	-					
31x12.50R15LT	1520	-	-	1715	1930	(C)	103	-	-	-	-	-	-	-	-	-	-					
32x11.50R15LT	1575	-	-	1795	1985	(B)	104	2185	2360	2535	(C)	113	-	-	-	-	-					
32x9.50R15LT	1450	-	-	1655	1820	(B)	101	-	-	-	-	-	-	-	-	-	-					
33x10.50R15LT	1630	-	-	1855	2040	(B)	105	2260	2445	2600	(C)	114	-	-	-	-	-					
33x12.50R15LT	1765	(B)	100	2000	2205	(C)	108	-	-	-	-	-	-	-	-	-	-					
33x13.50R15LT	1820	-	-	2065	2270	(C)	109	-	-	-	-	-	-	-	-	-	-					
33x9.50R15LT	1555	-	-	1770	1985	(B)	104	2170	2345	2535	(C)	113	-	-	-	-	-					
35x12.50R15LT	2040	-	-	2295	2535	(C)	113	-	-	-	-	-	-	-	-	-	-					
35x13.50R15LT	2095	-	-	2370	2600	(C)	114	-	-	-	-	-	-	-	-	-	-					
35x9.50R15LT	1730	-	-	1970	2205	(B)	108	-	-	-	-	-	-	-	-	-	-					
37x12.50R15LT	2270	(B)	109	2600	2910	(C)	118	-	-	-	-	-	-	-	-	-	-					
37x13.50R15LT	2335	-	-	2690	3000	(C)	119	-	-	-	-	-	-	-	-	-	-					
33x11.50R16LT	1640	-	-	1865	2095	-	-	2270	2455	2600	-	-	2800	2960	3085	-	-	3265	3410	3525	(E)	124
35x11.50R16LT	1890	-	-	2155	2405	-	-	2620	2835	3000	-	-	3230	3415	3640	(D)	125	-	-	-	-	-
33x10.50R17LT	1515	-	-	1725	1930	-	-	2105	2275	2470	-	-	2590	2740	2910	(D)	118	3005	3100	3195	(E)	121
33x11.50R17LT	1575	-	-	1795	1985	-	-	2185	2360	2535	-	-	2690	2845	3000	(D)	119	-	-	-	-	-
33x12.50R17LT	1610	-	-	1850	2040	(C)	105	2255	2440	2600	(D)	114	2780	2935	3085	(E)	120	3240	3380	3525	(F)	124
34x10.50R17LT	1635	-	-	1865	2095	-	-	2270	2455	2600	-	-	2795	2960	3085	(D)	120	3120	3160	3195	(E)	121
35x10.50R17LT	1760	-	-	2005	2205	-	-	2440	2640	2835	-	-	2955	3075	3195	(D)	121	3195	3195	3195	(E)	121
35x11.50R17LT	1830	-	-	2085	2335	-	-	2540	2745	2910	(C)	118	3125	3305	3525	-	-	3645	3805	3970	(E)	128
35x12.50R17LT	1875	-	-	2155	2405	(C)	111	2625	2840	3000	(D)	119	3235	3420	3640	(E)	125	3750	3860	3970	(F)	128
37x11.50R17LT	2095	-	-	2385	2680	-	-	2905	3140	3415	(C)	123	3575	3780	3970	(D)	128	-	-	-	-	-
37x12.50R17LT	2150	-	-	2470	2755	(C)	116	3005	3250	3525	(D)	124	3675	3820	3970	(E)	128	3970	3970	3970	(F)	128
37x13.50R17LT	2205	-	-	2550	2835	-	-	3105	3355	3640	(D)	125	3750	3860	3970	(E)	128	3970	3970	3970	(F)	128
38x11.50R17LT	2230	-	-	2540	2835	-	-	3090	3340	3525	-	-	3675	3820	3970	(D)	128	-	-	-	-	-
38x12.50R17LT	2335	-	-	2630	2910	(C)	118	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
38x13.50R17LT	2405	-	-	2715	3000	(C)	119	3305	3575	3860	(D)	127	3895	3935	3970	(E)	128	-	-	-	-	-
39x13.50R17LT	2535	-	-	2885	3195	(C)	121	3195	3195	3195	(D)	121	-	-	-	-	-	-	-	-	-	-
40x12.50R17LT	2600	-	-	2955	3305	(C)	122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
40x13.50R17LT	2680	(B)	115	3055	3415	(C)	123	3600	3785	3970	(D)	128	-	-	-	-	-	-	-	-	-	-
33x10.50R18LT	1450	-	-	1655	1820	-	-	2015	2175	2335	-	-	2480	2620	2755	(D)	116	2890	3020	3195	(E)	121
33x11.50R18LT	1505	-	-	1715	1930	-	-	2085	2255	2405	-	-	2570	2720	2835	-	-	3000	3130	3305	(E)	122
33x12.50R18LT	1565	-	-	1765	1985	-	-	2150	2325	2470	-	-	2650	2805	2910	(E)	118	3090	3230	3305	(F)	122
34x12.50R18LT	1710	-	-	1920	2150	-	-	2340	2530	2680	-	-	2880	3045	3195	(E)	121	-	-	-	-	-
35x11.50R18LT	1765	-	-	2010	2205	-	-	2445	2645	2835	(C)	117	3015	3190	3305	-	-	3515	3670	3860	(E)	127
35x12.50R18LT	1820	-	-	2075	2335	335	106	2530	2735	2910	(D)	118	3115	3295	3415	(E)	123	3630	3795	3970	(F)	128
35x13.50R18LT	1875	-	-	2140	2405	-	-	2605	2815	3000	(D)	119	-	-	-	-	-	-	-	-	-	-
36x13.50R18LT	2040	-	-	2305	2535	-	-	2805	3030	3195	(D)	121	-	-	-	-	-	-	-	-	-	-
37x11.50R18LT	2030	-	-	2315	2600	-	-	2815	3045	3305	-	-	3470	3670	3860	(D)	127	3895	3935	3970	(E)	128
37x12.50R18LT	2095	-	-	2395	2680	(C)	115	2915	3150	3415	(D)	123	3590	3795	3970	(E)	128	3970	3970	3970	(F)	128
37x13.50R18LT	2150	-	-	2470	2755	-	-	3005	3250	3525	(D)	124	3675	3820	3970	(E)	128	3970	3970	3970	(F)	128
38x11.50R18LT	2165	-	-	2470	2755	-	-	3005	3250	3525	-	-	3675	3820	3970	(D)	128	-	-	-	-	-
38x13.50R18LT	2335	-	-	2640	2910	-	-	3210	3470	3750	-	-	3825	3895	3970	(E)	128	-	-	-	-	-
40x13.50R18LT	2600	-	-	2980	3305	(C)	122	3525	3750	3970	-	-	3970	3970	3970	-	-	3970	3970	3970	(F)	128
33x11.50R20LT	1345	-	-	1535	1710	-	-	1870	2020	2150	-	-	2305	2435	2535	-	-	2				

LIGHT TRUCK TIRE LOAD AND INFLATION CHART - LT METRIC TIRE SIZES

Tire Load Limits (lbs.) at Various Inflation Pressures (PSI)														
Tire Size	Single/ Dual	35	40	45	50	55	60	65	70	75	80			
LT125/75R15	DUAL	1280	-	-	1340	1460	1610	(C) 97	1680	1785	1930	(D) 103	-	-
	SINGLE	1390	-	-	1475	1605	1765	(C) 100	1845	1960	2095	(D) 106	-	-
LT125/80R15	DUAL	1325	-	-	1395	1515	1655	-	1745	1855	1930	(D) 103	2065	2170
	SINGLE	1435	-	-	1535	1665	1820	-	1920	2040	2150	(D) 107	2270	2385
LT225/75R15	DUAL	1355	-	-	1440	1565	1710	(C) 99	1800	1915	1985	(D) 104	-	-
	SINGLE	1475	-	-	1585	1720	1875	(C) 102	1980	2105	2205	(D) 108	-	-
LT235/70R15	DUAL	1390	-	-	1465	1595	1710	(C) 99	1830	1945	2040	(D) 105	2165	2275
	SINGLE	1520	-	-	1610	1750	1875	(C) 102	1920	2010	2140	(D) 109	2380	2500
LT235/75R15	DUAL	1435	-	-	1530	1660	1820	(C) 101	1910	2035	2150	(D) 107	2265	2375
	SINGLE	1565	-	-	1680	1825	1985	(C) 104	2100	2235	2335	(D) 110	2490	2610
LT245/65R15	DUAL	1475	-	-	1595	1730	1875	(C) 102	-	-	-	-	-	-
	SINGLE	1520	-	-	1635	1775	1930	(C) 103	2045	2170	2335	(D) 110	-	-
LT245/75R15	DUAL	1655	-	-	1795	1950	2150	(C) 107	2245	2385	2535	(D) 113	-	-
	SINGLE	1565	-	-	1650	1795	1930	(C) 103	2065	2195	2335	(D) 110	-	-
LT255/70R15	DUAL	1710	-	-	1815	1970	2150	(C) 107	2270	2410	2535	(D) 113	-	-
	SINGLE	1610	-	-	1730	1880	2040	(C) 105	-	-	-	-	-	-
LT255/75R15	DUAL	1765	-	-	1900	2065	2270	(C) 109	-	-	-	-	-	-
	SINGLE	1655	-	-	1750	1900	2040	(C) 105	-	-	-	-	-	-
LT265/70R15	DUAL	1820	-	-	1925	2090	2270	(C) 109	-	-	-	-	-	-
	SINGLE	1710	-	-	1840	1995	2205	(C) 108	-	-	-	-	-	-
LT265/75R15	DUAL	1875	-	-	2020	2195	2405	(C) 111	-	-	-	-	-	-
	SINGLE	1820	-	-	1950	2120	2335	(C) 110	2440	2595	2755	(D) 116	-	-
LT285/70R15	DUAL	1985	-	-	2145	2330	2535	(C) 113	2680	2850	3000	(D) 119	-	-
	SINGLE	1985	(C) 107	2275	2470	2680	(D) 115	-	-	-	-	-	-	-
LT315/70R15	DUAL	2335	(C) 110	2500	2715	2910	(D) 118	-	-	-	-	-	-	-
	SINGLE	1170	-	-	1255	1365	1520	-	1570	1670	1765	(D) 100	-	-
LT215/65R16	DUAL	1280	-	-	1380	1500	1655	-	1725	1835	1930	(D) 103	-	-
	SINGLE	1280	-	-	1340	1455	1610	(C) 97	-	-	-	-	-	-
LT215/70R16	DUAL	1355	-	-	1455	1580	1710	-	1820	1935	2040	(D) 105	-	-
	SINGLE	1475	-	-	1600	1735	1875	-	2000	2125	2270	(D) 109	-	-
LT215/80R16	DUAL	1390	-	-	1490	1625	1765	(C) 100	1865	1985	2150	(D) 107	2210	2320
	SINGLE	1520	-	-	1640	1785	1940	(C) 103	2050	2180	2335	(D) 110	2430	2550
LT225/70R16	DUAL	1355	-	-	1435	1555	1710	(C) 99	-	-	-	-	-	-
	SINGLE	1475	-	-	1575	1710	1875	(C) 102	-	-	-	-	-	-
LT225/75R16	DUAL	1365	-	-	1500	1630	1765	(C) 100	1875	1995	2150	(D) 107	2220	2330
	SINGLE	1500	-	-	1650	1790	1940	(C) 103	2060	2190	2335	(D) 110	2440	2560
LT235/70R16	DUAL	1435	-	-	1525	1655	1820	(C) 101	1905	2025	2150	(D) 107	-	-
	SINGLE	1565	-	-	1675	1820	1985	(C) 104	2095	2225	2335	(D) 110	-	-
LT235/75R16	DUAL	1520	-	-	1595	1730	1930	-	1995	2115	227	270	103	2355
	SINGLE	1655	-	-	1750	1900	2095	-	2190	2325	247	470	112	2590
LT235/85R16	DUAL	1545	-	-	1700	1845	2006	(C) 104	2125	2260	2381	(D) 111	2515	2645
	SINGLE	1700	-	-	1870	2030	2205	(C) 108	2335	2485	2623	(D) 114	2765	2905
LT245/70R16	DUAL	1520	-	-	1620	1760	1930	(C) 103	2025	2150	2335	(D) 110	2400	2515
	SINGLE	1655	-	-	1780	1935	2095	(C) 106	2225	2365	2535	(D) 113	2635	2765
LT245/75R16	DUAL	1545	-	-	1700	1845	2006	(C) 104	2125	2255	2381	(D) 111	2515	2640
	SINGLE	1700	-	-	1870	2030	2205	(C) 108	2335	2480	2623	(D) 114	2765	2900
LT255/70R16	DUAL	1610	-	-	1720	1865	1985	(C) 104	2150	2285	2470	(D) 112	2545	2665
	SINGLE	1765	-	-	1890	2050	2205	(C) 108	2360	2510	2680	(D) 115	2795	2930
LT255/85R16	DUAL	1820	-	-	1920	2085	2270	(C) 109	2400	2555	2700	(D) 116	2840	2980
	SINGLE	1985	-	-	2100	2290	2470	(C) 112	2625	2790	3000	(D) 119	3105	3260
LT265/70R16	DUAL	1820	-	-	1915	2075	2235	(C) 110	2415	2590	2810	(D) 114	2690	2825
	SINGLE	1875	-	-	2000	2170	2335	(C) 110	2500	2655	2835	(D) 117	2955	3105
LT265/75R16	DUAL	1820	-	-	1910	2075	2230	(C) 109	2390	2560	2755	(D) 116	2825	2965
	SINGLE	1985	-	-	2100	2280	2470	(C) 112	2625	2790	3000	(D) 119	3105	3260
LT275/70R16	DUAL	1820	-	-	1920	2090	2270	(C) 109	2400	2555	2755	(D) 116	-	-
	SINGLE	1985	-	-	2100	2295	2470	(C) 112	2640	2805	3000	(D) 119	-	-
LT285/60R16	DUAL	1820	-	-	1920	2085	2270	(C) 109	-	-	-	-	-	-
	SINGLE	1930	-	-	2025	2200	2335	(C) 110	2535	2695	2835	-	3000	3150
LT285/70R16	DUAL	2095	-	-	2225	2420	2600	(C) 114	2785	2960	3085	-	3295	3460
	SINGLE	1985	-	-	2130	2310	2535	(C) 113	2660	2830	3000	(D) 119	3155	3310
LT285/75R16	DUAL	2205	-	-	2340	2540	2755	(C) 116	2925	3110	3305	-	3465	3750
	SINGLE	2040	-	-	2240	2430	2680	(C) 115	2795	2970	3085	(D) 120	3310	3470
LT295/75R16	DUAL	2270	-	-	2460	2670	2910	(C) 118	3070	3265	3415	-	3710	3970
	SINGLE	2040	-	-	2245	2440	2680	(D) 115	2805	2980	3195	(E) 121	3320	3485
LT305/70R16	DUAL	2270	-	-	2465	2680	2910	(D) 118	3085	3275	3525	-	3715	3970
	SINGLE	2205	-	-	2360	2565	2835	-	2955	3135	3305	(E) 122	-	-
LT305/75R16	DUAL	2405	-	-	2595	2820	3085	-	3245	3445	3640	-	3825	3970
	SINGLE	1875	-	-	2020	2195	2405	(D) 111	-	-	-	-	-	-
LT315/70R16	DUAL	2205	-	-	2355	2560	2835	(D) 117	-	-	-	-	-	-
	SINGLE	2405	-	-	2590	2815	3085	(D) 120	-	-	-	-	-	-
LT315/75R16	DUAL	2335	(C) 110	2470	2685	2910	(D) 118	3090	3285	3525	(E) 124	-	-	-
	SINGLE	2535	(C) 113	2715	2950	3195	(D) 121	3395	3610	3860	(E) 127	-	-	-
LT225/65R17	DUAL	1325	-	-	1390	1510	1655	-	1740	1845	1930	(D) 103	-	-
	SINGLE	1435	-	-	1530	1660	1820	-	1910	2030	2150	(D) 107	-	-
LT225/70R17	DUAL	1390	-	-	1490	1620	1765	-	1865	1980	2150	(D) 107	2205	2315
	SINGLE	1520	-	-	1640	1780	1930	-	2050	2175	2335	(D) 110	2425	2545
LT225/75R17	DUAL	1475	-	-	1565	1695	1875	-	1950	2075	2240	-	2310	2430
	SINGLE	1610	-	-	1720	1865	2040	-	2145	2280	2460	-	2540	2670
LT235/60R17	DUAL	1375	-	-	1435	1555	1710	-	1800	1925	2030	-	2135	2270
	SINGLE	1435	-	-	1510	1640	1765	-	1890	2005	2150	-	2235	2345
LT235/65R17	DUAL	1390	-	-	1490	1615	1765	-	1860	1975	2040	(D) 105	-	-
	SINGLE	1520	-	-	1635	1775	1930	-	2045	2170	2270	(D) 109	-	-
LT235/80R17	DUAL	1610	-	-	1725	1870	2040	-	2155	2290	2470	-	2555	2675
	SINGLE	1765	-	-	1895	2055	2250	-	2370	2515	2680	-	2805	2940
LT245/65R17	DUAL	1475	-	-	1575	1705	1875	-	1965	2090	2205	(D) 108	2325	2445
	SINGLE	1610	-	-	1730	1875	2040	(C) 105	2160	2355	2405	(D) 111	2555	2685
LT245/70R17	DUAL	1565	-	-	1690	1830	1985	(C) 104						

“EXTRA LOAD” TIRE SPECIFICATION LOAD (lbs.) AND INFLATION (PSI) TABLE
Based on ETRTO Data

Load Index	Air Pressure (PSI)																
	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
80	670	691	717	738	760	785	796	818	829	853	876	887	911	935	955	979	992
81	692	713	739	760	771	797	818	840	851	876	897	919	944	969	977	1,002	1,019
82	713	734	762	782	793	819	840	861	883	909	919	941	966	992	999	1,024	1,047
83	735	745	773	793	814	841	862	882	904	931	941	963	989	1,015	1,031	1,057	1,074
84	749	766	782	816	849	871	893	915	937	959	981	999	1,018	1,036	1,058	1,080	1,102
85	771	788	805	849	882	904	926	948	966	985	1,003	1,025	1,047	1,069	1,091	1,114	1,136
86	793	816	838	871	904	926	948	970	992	1,014	1,036	1,058	1,080	1,102	1,124	1,147	1,169
87	816	838	860	893	926	952	977	1,003	1,025	1,047	1,069	1,091	1,114	1,136	1,158	1,180	1,202
88	838	860	882	915	959	981	1,003	1,025	1,047	1,069	1,091	1,117	1,143	1,169	1,191	1,213	1,235
89	849	882	915	948	992	1,014	1,036	1,058	1,084	1,110	1,136	1,162	1,187	1,213	1,235	1,257	1,279
90	904	926	948	981	1,025	1,051	1,076	1,102	1,128	1,154	1,180	1,202	1,224	1,246	1,272	1,297	1,323
91	926	948	970	1,003	1,047	1,073	1,099	1,125	1,151	1,176	1,202	1,228	1,253	1,279	1,305	1,330	1,356
92	948	970	992	1,036	1,069	1,099	1,128	1,158	1,184	1,209	1,235	1,261	1,286	1,312	1,338	1,363	1,389
93	981	1,003	1,025	1,069	1,102	1,132	1,161	1,191	1,217	1,242	1,268	1,297	1,327	1,356	1,382	1,407	1,433
94	1,003	1,031	1,058	1,102	1,147	1,173	1,198	1,224	1,253	1,283	1,312	1,341	1,371	1,400	1,426	1,451	1,477
95	1,036	1,058	1,080	1,136	1,180	1,209	1,239	1,268	1,297	1,327	1,356	1,382	1,407	1,433	1,462	1,492	1,521
96	1,069	1,091	1,113	1,157	1,213	1,242	1,272	1,301	1,330	1,360	1,389	1,418	1,448	1,477	1,506	1,536	1,565
97	1,102	1,124	1,146	1,190	1,246	1,275	1,305	1,334	1,367	1,400	1,433	1,462	1,492	1,521	1,550	1,580	1,609
98	1,124	1,152	1,179	1,223	1,279	1,312	1,345	1,378	1,407	1,437	1,466	1,499	1,532	1,565	1,594	1,624	1,653
99	1,168	1,196	1,223	1,267	1,323	1,356	1,389	1,422	1,455	1,488	1,521	1,550	1,580	1,609	1,642	1,676	1,709
100	1,201	1,229	1,256	1,311	1,367	1,400	1,433	1,466	1,499	1,532	1,565	1,598	1,632	1,665	1,698	1,731	1,764
101	1,245	1,273	1,300	1,356	1,400	1,437	1,473	1,510	1,547	1,583	1,620	1,653	1,687	1,720	1,753	1,786	1,819
102	1,278	1,306	1,333	1,389	1,444	1,481	1,517	1,554	1,591	1,628	1,665	1,702	1,738	1,775	1,808	1,841	1,874
103	1,311	1,345	1,378	1,433	1,488	1,525	1,561	1,598	1,635	1,672	1,709	1,746	1,782	1,819	1,856	1,892	1,929
104	1,356	1,384	1,411	1,477	1,532	1,572	1,613	1,653	1,690	1,727	1,764	1,801	1,837	1,874	1,911	1,947	1,984
105	1,389	1,411	1,433	1,510	1,576	1,617	1,657	1,698	1,735	1,772	1,809	1,849	1,889	1,929	1,966	2,002	2,039
106	1,433	1,461	1,488	1,554	1,620	1,661	1,701	1,742	1,782	1,823	1,863	1,900	1,936	1,973	2,013	2,054	2,094
107	1,466	1,499	1,532	1,598	1,665	1,705	1,746	1,786	1,826	1,867	1,907	1,947	1,988	2,028	2,068	2,109	2,149
108	1,510	1,543	1,576	1,642	1,698	1,742	1,786	1,830	1,874	1,918	1,962	2,002	2,043	2,083	2,123	2,164	2,204
109	1,554	1,587	1,620	1,686	1,753	1,797	1,841	1,885	1,929	1,973	2,017	2,061	2,105	2,149	2,190	2,230	2,271
110	1,598	1,631	1,664	1,730	1,808	1,852	1,896	1,940	1,984	2,028	2,072	2,116	2,160	2,204	2,248	2,293	2,337
111	1,642	1,675	1,708	1,785	1,852	1,900	1,947	1,995	2,043	2,090	2,138	2,182	2,227	2,271	2,315	2,359	2,403
112	1,686	1,725	1,763	1,829	1,907	1,955	2,002	2,050	2,098	2,145	2,193	2,241	2,289	2,337	2,381	2,425	2,469
113	1,730	1,769	1,807	1,884	1,962	2,010	2,057	2,105	2,153	2,201	2,249	2,297	2,344	2,392	2,440	2,487	2,535
114	1,774	1,813	1,851	1,929	2,006	2,057	2,109	2,160	2,212	2,263	2,315	2,363	2,410	2,458	2,506	2,553	2,601
115	1,829	1,868	1,907	1,995	2,072	2,124	2,175	2,227	2,278	2,330	2,381	2,429	2,476	2,524	2,575	2,627	2,678
116	1,884	1,923	1,962	2,050	2,127	2,183	2,238	2,293	2,344	2,396	2,447	2,498	2,550	2,601	2,652	2,704	2,755
117	1,929	1,973	2,017	2,105	2,193	2,245	2,296	2,348	2,403	2,458	2,513	2,568	2,623	2,678	2,730	2,781	2,833
118	1,984	2,028	2,072	2,160	2,249	2,304	2,359	2,414	2,469	2,524	2,579	2,634	2,689	2,744	2,799	2,855	2,910
119	2,050	2,094	2,138	2,226	2,315	2,374	2,432	2,491	2,550	2,608	2,667	2,722	2,778	2,833	2,888	2,943	2,998
120	2,105	2,155	2,204	2,292	2,381	2,443	2,506	2,568	2,627	2,685	2,744	2,799	2,855	2,910	2,969	3,027	3,086

NOTE: "Extra Load" tires require an additional 6 PSI added to carry the same loads as "Standard" tires.

“STANDARD” TIRE SPECIFICATION LOAD (lbs.) AND INFLATION (PSI) TABLE
Based on ETRTO Data

Load Index	Air Pressure (PSI)											
	26	27	28	29	30	31	32	33	34	35	36	
80	761	778	794	827	860	882	904	926	948	970	992	
81	783	800	816	849	882	904	926	948	972	995	1,019	
82	805	822	838	877	915	937	959	981	1,003	1,025	1,047	
83	827	844	860	899	937	959	981	1,003	1,036	1,069	1,074	
84	849	866	882	921	959	985	1,010	1,036	1,058	1,080	1,102	
85	871	893	915	954	992	1,014	1,036	1,058	1,084	1,109	1,135	
86	904	921	937	976	1,014	1,040	1,065	1,091	1,117	1,142	1,168	
87	926	948	970	1,009	1,047	1,073	1,098	1,124	1,150	1,175	1,201	
88	948	970	992	1,031	1,069	1,098	1,128	1,157	1,183	1,209	1,235	
89	982	1,004	1,025	1,069	1,113	1,143	1,172	1,202	1,228	1,253	1,279	
90	1,014	1,036	1,058	1,102	1,146	1,176	1,205	1,235	1,264	1,294	1,323	
91	1,047	1,069	1,091	1,135	1,179	1,209	1,238	1,268	1,297	1,327	1,356	
92	1,069	1,091	1,113	1,163	1,213	1,242	1,272	1,301	1,330	1,360	1,389	
93	1,102	1,124	1,146	1,196	1,246	1,279	1,312	1,345	1,374	1,404	1,433	
94	1,135	1,163	1,190	1,240	1,290	1,319	1,349	1,378	1,411	1,444	1,477	
95	1,168	1,196	1,224	1,274	1,323	1,356	1,389	1,422	1,455	1,488	1,521	
96	1,202	1,230	1,257	1,312	1,367	1,400	1,433	1,466	1,499	1,532	1,565	
97	1,235	1,263	1,290	1,345	1,400	1,437	1,473	1,510	1,543	1,576	1,609	
98	1,268	1,296	1,323	1,378	1,433	1,470	1,506	1,543	1,580	1,616	1,653	
99	1,312	1,340	1,367	1,428	1,488	1,525	1,561	1,598	1,635	1,672	1,709	
100	1,356	1,384	1,411	1,472	1,532	1,572	1,613	1,653	1,690	1,727	1,764	
101	1,400	1,428	1,455	1,521	1,587	1,624	1,661	1,698	1,738	1,779	1,819	
102	1,444	1,472	1,499	1,565	1,631	1,672	1,712	1,753	1,793	1,834	1,874	
103	1,488	1,521	1,554	1,615	1,676	1,720	1,764	1,808	1,848	1,889	1,929	
104	1,521	1,560	1,598	1,665	1,731	1,771	1,812	1,852	1,896	1,940	1,984	
105	1,565	1,604	1,642	1,709	1,775	1,819	1,863	1,907	1,951	1,995	2,039	
106	1,609	1,648	1,687	1,753	1,819	1,867	1,914	1,962	2,006	2,050	2,094	
107	1,653	1,692	1,731	1,803	1,874	1,918	1,962	2,006	2,054	2,101	2,149	
108	1,698	1,737	1,775	1,847	1,918	1,966	2,013	2,061	2,109	2,156	2,204	
109	1,742	1,781	1,819	1,896	1,973	2,024	2,076	2,127	2,175	2,223	2,271	
110	1,797	1,836	1,874	1,951	2,028	2,079	2,131	2,182	2,234	2,285	2,337	
111	1,852	1,891	1,929	2,012	2,094	2,146	2,197	2,249	2,300	2,352	2,403	
112	1,896	1,940	1,984	2,067	2,149	2,204	2,260	2,315	2,366	2,418	2,469	
113	1,951	1,995	2,039	2,122	2,204	2,259	2,315	2,370	2,425	2,480	2,535	
114	1,995	2,039	2,083	2,172	2,260	2,319	2,377	2,436	2,491	2,546	2,601	
115	2,061	2,105	2,149	2,238	2,326	2,385	2,443	2,502	2,561	2,619	2,678	
116	2,116	2,166	2,216	2,304	2,392	2,454	2,517	2,579	2,638	2,696	2,755	
117	2,182	2,227	2,271	2,370	2,469	2,528	2,586	2,645	2,708	2,770	2,833	
118	2,238											



FALKEN
TIRES

falkentire.com | 800.723.2553

© 2025 Sumitomo Rubber North America, Inc.
All Rights Reserved.
9087-0125