

FOR EVERYTHING YOU VALUE. FOR 130 YEARS.

UNIROYAL[®] DATA BOOK

PASSENGER AND LIGHT TRUCK TIRES

SEPTEMBER 2022





PROUD OF THE PAST, BUT NOT STUCK IN IT.

130 years of building affordable, dependable tires has taught us one thing for sure—value never goes out of style.

Value isn't going anywhere. In fact, it's getting better. At Uniroyal®, we've evolved and gained momentum to strengthen our product portfolio. We extended the UNIROYAL® Tiger Paw® Touring A/S line to include additional sizes and launched an entirely new tire, the ultra-high-performance UNIROYAL® Power Paw® All Season tire with 20% improved wear* and more market coverage than ever.

Even with a growing portfolio, we remain committed to our dealers, distributors and value-driven customers. That won't change. Our customers are smart and sensible drivers, and they deserve affordable and dependable tires—mile after mile after mile.



* Based on internal wear testing results performed using a 2018 Toyota Camry versus the previous-generation UNIROYAL® Tiger Paw® GTZ All Season 2 tire in size 215/45ZR17 91Y. Actual on-road results may vary.



TABLE OF CONTENTS

OVERVIEW

TIRE CATEGORIES..... 1

ULTRA-HIGH-PERFORMANCE TIRE

UNIROYAL® POWER PAW® All Season..... 5

PERFORMANCE/PASSENGER TIRE

UNIROYAL® TIGER PAW® Touring A/S..... 9

LIGHT TRUCK/SUV/CROSSOVER TIRES

UNIROYAL® LAREDO® Cross Country Tour..... 13

UNIROYAL® LAREDO® Cross Country..... 15

TIPS & IMPORTANT INFORMATION

SPEED RATINGS..... 17

IMPORTANT PRODUCT NOTIFICATIONS..... 19

COMPARISON CHARTS 20

TIRE CATEGORIES

ULTRA-HIGH-PERFORMANCE AND PERFORMANCE PASSENGER TIRES

ULTRA-HIGH-PERFORMANCE TIRE

The UNIROYAL® Power Paw® All Season tire was created on the principle that customers shouldn't have to choose between ultra-high-performance and breaking the bank.

The UNIROYAL® Power Paw® All Season tire offers expanded market coverage (45 of the top 50 sizes) and 20% improved wear* thanks to the tire's unique compound and tread pattern. Add to that, its sleek, high-performance tread pattern and modern, distinctive sidewall design, and customers are getting a 45,000-mile warranty on a tire that's hitting the sweet spot for their cost and design preferences.

*Based on internal wear testing results performed using a 2018 Toyota Camry versus the previous-generation UNIROYAL® Tiger Paw® GTZ All Season 2 tire in size 215/45ZR17 91Y. Actual on-road results may vary.

PERFORMANCE PASSENGER TIRE

The UNIROYAL® Tiger Paw® family of passenger car and minivan tires provides a comfortable, quiet ride, long-lasting treadlife and all-season traction on the highway and around town.

Ride in confidence on virtually any road and in virtually any weather. Uniroyal® passenger tires give you and your family the comfort you want along with the performance you need. Get outstanding everyday performance that's designed for your style of driving.





TIRE CATEGORIES

LIGHT TRUCK/SUV/CROSSOVER TIRES

LIGHT TRUCK/SUV/ CROSSOVER TIRES

Get the long treadlife, toughness and all-season grip you want in a tire that helps keep you comfortable and safe on and off the road. You can depend on the **UNIROYAL® Laredo®** family of tires in any environment.

From off-road ruggedness to smooth, performance-based on-road use, these tires are engineered to help drivers get the most out of their particular vehicles and driving styles. All at a surprisingly affordable price.





UNIROYAL®

POWER PAW® ALL SEASON

An ultra-high-performance all-season tire that offers long-lasting treadlife for everyday drivers.



ALL-SEASON TIRE

**FEATURES AND BENEFITS**

■ **Long-lasting treadlife, now backed by a 45,000-mile warranty.**

Tru-Last Technology gives you long, even treadwear by managing stress within the tire footprint.

When tested for treadwear, the UNIROYAL® Power Paw® All Season tire lasted at least 20% longer than its predecessor¹.

■ **Engineered to give you a confident ride.**


Wide, circumferential tread grooves and a new all-season compound.

■ **An ultra-high-performance tire designed for a quiet, comfortable ride.**

Computer-phased and optimized tread design.

GET A HIGH-PERFORMANCE, SLEEK REPLACEMENT FOR LESS THAN YOU THINK.

This next-gen, ultra-high-performance tire brings improved features and a robust warranty to value-seeking consumers. Plus the sleek, performance-based tread design with a modern, distinct sidewall design makes this UHP tire stand out in the market.

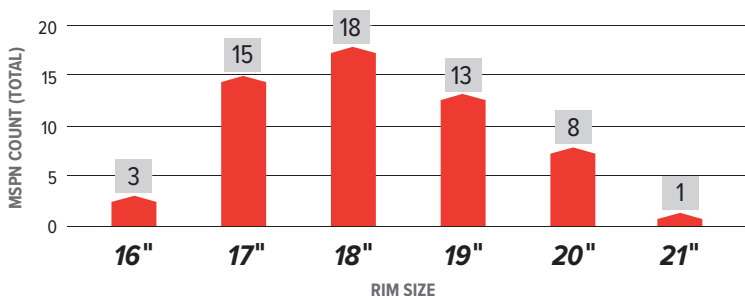MSPN COUNT PER RIM SIZE

PROVIDING YOU WITH THE BEST COVERAGE

Expanded market coverage with 58 total sizes, 40 that are 18" and above, 45 of the top 50 sizes.

¹Based on internal wear testing results performed using a 2018 Toyota Camry versus the previous-generation UNIROYAL® Tiger Paw® GTZ All Season 2 tire in size 215/45ZR17 91Y. Actual on-road results may vary.

UNIROYAL® POWER PAW® ALL SEASON

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/ MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
205/55ZR16	91W	45K	BSW	76489	5.5 - 7.5	8.43 on 6.5	24.8	9.5	836	1356@51	500/B/A
215/55ZR16	93W	45K	BSW	11017	6 - 7.5	8.9 on 7	25.2	9.5	823	1433@51	500/B/A
225/50ZR16	92W	45K	BSW	04900	6 - 8	9.17 on 7	24.8	9.5	836	1389@51	500/B/A
205/40ZR17/XL	84W	45K	BSW	74854	7 - 8	8.35 on 7.5	23.4	9.5	887	1102@50	500/B/A
205/45ZR17/XL	88Y	45K	BSW	14782	6.5 - 7.5	8.11 on 7	24.2	9.5	858	1235@50	500/B/A
205/50ZR17/XL	93Y	45K	BSW	77939	5.5 - 7.5	8.43 on 6.5	25.1	9.5	828	1433@50	500/B/A
215/45ZR17/XL	91Y	45K	BSW	08873	7 - 8	8.39 on 7	24.6	9.5	844	1356@50	500/B/A
215/50ZR17/XL	95Y	45K	BSW	43931	6 - 7.5	8.9 on 7	25.5	9.5	815	1521@50	500/B/A
215/55ZR17/XL	98Y	45K	BSW	04177	6 - 7.5	8.9 on 7	26.3	9.5	791	1653@50	500/B/A
225/45ZR17/XL	94Y	45K	BSW	81940	7 - 8.5	8.86 on 7.5	24.9	9.5	833	1477@50	500/B/A
225/50ZR17/XL	98Y	45K	BSW	17614	6 - 8	9.17 on 7	25.9	9.5	803	1653@50	500/B/A
225/55ZR17/XL	101Y	45K	BSW	69881	6 - 8	9.17 on 7	26.7	9.5	777	1819@50	500/B/A
235/45ZR17/XL	97Y	45K	BSW	01282	7.5 - 9	9.29 on 8	25.3	9.5	821	1609@50	500/B/A
235/50ZR17	96Y	45K	BSW	75699	6.5 - 8.5	9.65 on 7.5	26.3	9.5	791	1565@51	500/B/A
235/55ZR17/XL	103Y	45K	BSW	03625	6.5 - 8.5	9.65 on 7.5	27.1	9.5	766	1929@50	500/B/A
245/40ZR17	91Y	45K	BSW	66431	8 - 9.5	9.76 on 8.5	24.7	9.5	841	1356@51	500/B/A
245/45ZR17/XL	99Y	45K	BSW	53505	7.5 - 9	9.57 on 8	25.6	9.5	810	1709@50	500/B/A
275/40ZR17	98W	45K	BSW	82237	9 - 11	10.94 on 9.5	25.6	9.5	810	1653@51	500/B/A
215/40ZR18/XL	89Y	45K	BSW	86961	7 - 8.5	8.58 on 7.5	24.7	9.5	840	1279@50	500/B/A
215/45ZR18/XL	93Y	45K	BSW	50265	7 - 8	8.39 on 7	25.6	9.5	812	1433@50	500/B/A
225/40ZR18/XL	92Y	45K	BSW	54335	7.5 - 9	9.06 on 8	25	9.5	829	1389@50	500/B/A
225/45ZR18/XL	95Y	45K	BSW	63283	7 - 8.5	8.86 on 7.5	25.9	9.5	802	1521@50	500/B/A
225/50ZR18/XL	99W	45K	BSW	20859	6 - 8	9.17 on 7	26.8	9.5	774	1709@50	500/B/A
225/60ZR18	100W	45K	BSW	58334	6 - 8	8.98 on 6.5	28.6	9.5	727	1764@51	500/B/A
235/40ZR18/XL	95Y	45K	BSW	49725	8 - 9.5	9.49 on 8.5	25.3	9.5	819	1521@50	500/B/A
235/45ZR18/XL	98Y	45K	BSW	30583	7.5 - 9	9.29 on 8	26.3	9.5	790	1653@50	500/B/A
235/50ZR18/XL	101Y	45K	BSW	2934	6.5 - 8.5	9.65 on 7.5	27.2	9.5	762	1819@50	500/B/A
245/40ZR18/XL	97Y	45K	BSW	54885	8 - 9.5	9.76 on 8.5	25.7	9.5	809	1609@50	500/B/A
245/45ZR18/XL	100Y	45K	BSW	11979	7.5 - 9	9.57 on 8	26.6	9.5	780	1764@50	500/B/A
245/50ZR18	100Y	45K	BSW	62780	7 - 8.5	9.96 on 7.5	27.6	9.5	751	1764@51	500/B/A
245/55ZR18	103W	45K	BSW	93651	7 - 8.5	9.96 on 7.5	28.6	9.5	727	1929@51	500/B/A
255/35ZR18/XL	94Y	45K	BSW	40707	8.5 - 10	10.24 on 9	25	9.5	832	1477@50	500/B/A
255/40ZR18/XL	99Y	45K	BSW	36067	8.5 - 10	10.24 on 9	26	9.5	799	1709@50	500/B/A
255/45ZR18/XL	103Y	45K	BSW	03124	8 - 9.5	10.04 on 8.5	27	9.5	769	1929@50	500/B/A

continued

Refer to the "Important Product Information" section at the back of the book.



UNIROYAL® POWER PAW® ALL SEASON

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
265/35ZR18/XL	97Y	45K	BSW	12536	9 - 10.5	10.67 on 9.5	25.3	9.5	822	1609@50	500/B/A
275/35ZR18/XL	99Y	45K	BSW	33699	9 - 11	10.94 on 9.5	25.5	9.5	814	1709@50	500/B/A
225/40ZR19/XL	93Y	45K	BSW	09535	7.5 - 9	9.06 on 8	26.1	9.5	797	1433@50	500/B/A
225/45ZR19/XL	96W	45K	BSW	23436	7 - 8.5	8.86 on 7.5	26.9	9.5	771	1565@50	500/B/A
235/35ZR19/XL	91Y	45K	BSW	04988	8 - 9.5	9.49 on 8.5	25.4	9.5	817	1356@50	500/B/A
235/40ZR19/XL	96W	45K	BSW	00900	8 - 9.5	9.49 on 8.5	26.4	9.5	787	1565@50	500/B/A
245/35ZR19/XL	93Y	45K	BSW	06681	8 - 9.5	9.76 on 8.5	25.7	9.5	807	1433@50	500/B/A
245/40ZR19/XL	98Y	45K	BSW	56191	8 - 9.5	9.76 on 8.5	26.7	9.5	778	1653@50	500/B/A
245/45ZR19/XL	102Y	45K	BSW	17282	7.5 - 9	9.57 on 8	27.6	9.5	751	1874@50	500/B/A
245/50ZR19/XL	105W	45K	BSW	02543	7 - 8.5	9.96 on 7.5	28.7	9.5	725	2039@50	500/B/A
255/35ZR19/XL	96Y	45K	BSW	08574	8.5 - 10	10.24 on 9	26	9.5	799	1565@50	500/B/A
255/40ZR19/XL	100Y	45K	BSW	34570	8.5 - 10	10.24 on 9	27	9.5	769	1764@50	500/B/A
275/35ZR19/XL	100Y	45K	BSW	53310	9 - 11	10.94 on 9.5	26.5	9.5	783	1764@50	500/B/A
275/40ZR19/XL	105Y	45K	BSW	23639	9 - 11	10.94 on 9.5	27.6	9.5	751	2039@50	500/B/A
285/35ZR19/XL	103Y	45K	BSW	98689	9.5 - 11	11.42 on 10	26.8	9.5	774	1929@50	500/B/A
245/35ZR20/XL	95Y	45K	BSW	22857	8 - 9.5	9.76 on 8.5	26.7	9.5	777	1521@50	500/B/A
245/40ZR20/XL	99Y	45K	BSW	73366	8 - 9.5	9.76 on 8.5	27.7	9.5	750	1709@50	500/B/A
245/45ZR20/XL	103Y	45K	BSW	35742	7.5 - 9	9.57 on 8	28.6	9.5	726	1929@50	500/B/A
255/35ZR20/XL	97Y	45K	BSW	11467	8.5 - 10	10.24 on 9	27	9.5	770	1609@50	500/B/A
255/45ZR20	101Y	45K	BSW	26410	8 - 9.5	10.04 on 8.5	29	9.5	716	1819@51	500/B/A
265/35ZR20/XL	99Y	45K	BSW	12378	9 - 10.5	10.67 on 9.5	27.3	9.5	761	1709@50	500/B/A
275/30ZR20/XL	97Y	45K	BSW	79737	9 - 10	10.94 on 9.5	26.5	9.5	784	1609@50	500/B/A
275/35ZR20/XL	102Y	45K	BSW	72866	9 - 11	10.94 on 9.5	27.5	9.5	755	1874@50	500/B/A
295/35ZR21/XL	107Y	45K	BSW	48950	10 - 11.5	11.85 on 10.5	29	9.5	715	2149@50	500/B/A

THE OFFICIAL TIRE OF FAMILY

For generations of “Are we there yet?”



UNIROYAL®

TIGER PAW® TOURING A/S

Our long-lasting, all-season tire designed for your everyday needs.



ALL-SEASON TIRE



FEATURES AND BENEFITS

- Long-lasting treadlife, backed by a 75,000-mile warranty for H-speed rated and 65,000-mile warranty for V-speed rated.**

Tru-Last Technology gives you long, even treadwear by managing stress within the tire footprint.

- Confidence in any weather condition.**

All-season compound combined with a high sipe density for maximum biting edges.


- Comfort, quality and peace of mind everyday.**

Tire footprint shape balanced with an optimized tread pattern design.

PRODUCT COVERAGE

The UNIROYAL® Tiger Paw® Touring A/S tire has an estimated **90% market coverage across passenger cars, CUV and small/medium SUV segments**, allowing you to fit a very large number of vehicles on the road in America today with a single product line.

MSPN COUNT PER RIM SIZE

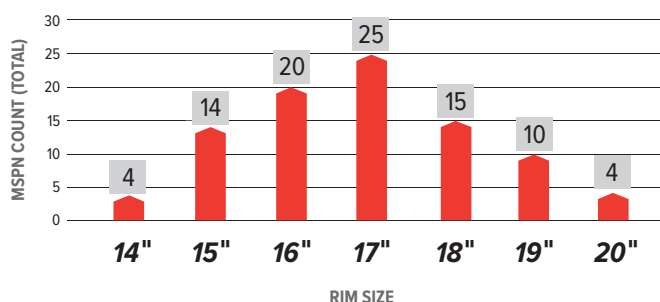

UNIROYAL® TIGER PAW® TOURING A/S

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/ MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
175/65R14	82H	75K	BSW	35584	5 - 6	6.97 on 5	22.9	11.5	905	1047@44	700/A/A
185/60R14	82H	75K	BSW	36038	5 - 6.5	7.44 on 5.5	22.7	11.5	914	1047@44	700/A/A
185/65R14	86H	75K	BSW	37647	5 - 6.5	7.44 on 5.5	23.4	11.5	887	1168@44	700/A/A
195/60R14	86H	75K	BSW	32461	5.5 - 7	7.91 on 6	23.2	11.5	895	1168@44	700/A/A
175/65R15	84H	75K	BSW	65138	5 - 6	6.97 on 5	23.9	11.5	867	1102@44	700/A/A
185/55R15	82V	65K	BSW	13864	5 - 6.5	7.64 on 6	23	10.5	903	1047@51	600/A/A
185/60R15	84H	75K	BSW	26635	5 - 6.5	7.44 on 5.5	23.7	11.5	876	1102@44	700/A/A
185/65R15	88H	75K	BSW	04683	5 - 6.5	7.44 on 5.5	24.4	11.5	851	1235@44	700/A/A
195/55R15	85V	65K	BSW	04341	5.5 - 7	7.91 on 6	23.4	10.5	888	1135@44	600/A/A
195/60R15	88H	75K	BSW	43238	5.5 - 7	7.91 on 6	24.2	11.5	859	1235@44	700/A/A
195/65R15	91H	75K	BSW	59865	5.5 - 7	7.91 on 6	25	11.5	832	1356@44	700/A/A
205/60R15	91H	75K	BSW	07144	5.5 - 7.5	8.23 on 6	24.6	11.5	842	1356@44	700/A/A
205/65R15	94H	75K	BSW	20887	5.5 - 7.5	8.23 on 6	25.4	11.5	817	1477@44	700/A/A
205/70R15	96H	75K	BSW	21672	5 - 7	8.23 on 6	26.3	11.5	790	1565@44	700/A/A
215/60R15	94H	75K	BSW	04287	6 - 7.5	8.7 on 6.5	25.1	11.5	827	1477@44	700/A/A
215/65R15	96H	75K	BSW	96020	6 - 7.5	8.7 on 6.5	26	11.5	799	1565@44	700/A/A
215/70R15	98H	75K	BSW	60225	5.5 - 7	8.7 on 6.5	26.8	11.5	774	1653@44	700/A/A
225/60R15	96H	75K	BSW	94976	6 - 8	8.98 on 6.5	25.6	11.5	812	1565@44	700/A/A
185/55R16	83H	75K	BSW	26243	5 - 6.5	7.64 on 6	24	11.5	866	1074@44	700/A/A
195/50R16	84V	65K	BSW	67862	5.5 - 7	7.91 on 6	23.7	10.5	878	1102@51	600/A/A
195/55R16	87V	65K	BSW	22195	5.5 - 7	7.91 on 6	24.4	10.5	852	1201@44	600/A/A
205/50R16	87H	75K	BSW	00722	5.5 - 7.5	8.43 on 6.5	24	11.5	863	1201@44	700/A/A
205/55R16	91H	75K	BSW	01571	5.5 - 7.5	8.43 on 6.5	24.8	11.5	836	1356@44	700/A/A
205/55R16	91V	65K	BSW	01318	5.5 - 7.5	8.43 on 6.5	24.8	10.5	836	1356@44	600/A/A
205/60R16	92H	75K	BSW	05599	5.5 - 7.5	8.23 on 6	25.6	11.5	810	1389@44	700/A/A
205/60R16	92V	65K	BSW	92243	5.5 - 7.5	8.23 on 6	25.6	10.5	810	1389@44	600/A/A
205/65R16	95H	75K	BSW	76774	5.5 - 7.5	8.23 on 6	26.4	11.5	786	1521@44	700/A/A
205/70R16	97H	75K	BSW	12721	5 - 7	8.23 on 6	27.3	11.5	761	1609@44	700/A/A
215/55R16/XL	97H	75K	BSW	19806	6 - 7.5	8.9 on 7	25.2	11.5	823	1609@50	700/A/A
215/60R16	95H	75K	BSW	80398	6 - 7.5	8.7 on 6.5	26.1	11.5	796	1521@44	700/A/A
215/60R16	95V	65K	BSW	95437	6 - 7.5	8.7 on 6.5	26.1	10.5	796	1521@44	600/A/A
215/65R16	98H	75K	BSW	53849	6 - 7.5	8.7 on 6.5	27	11.5	770	1653@44	700/A/A

continued

Refer to the "Important Product Information" section at the back of the book.

UNIROYAL® TIGER PAW® TOURING A/S

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
215/70R16	100H	75K	BSW	64435	5.5 - 7	8.7 on 6.5	27.8	11.5	746	1764@44	700/A/A
225/55R16	95V	65K	BSW	52787	6 - 8	9.17 on 7	25.7	10.5	808	1521@44	600/A/A
225/60R16	98H	75K	BSW	66985	6 - 8	8.98 on 6.5	26.6	11.5	782	1653@44	700/A/A
225/60R16	98V	65K	BSW	23086	6 - 8	8.98 on 6.5	26.6	10.5	782	1653@44	600/A/A
225/65R16	100H	75K	BSW	90665	6 - 8	8.98 on 6.5	27.4	11.5	757	1764@44	700/A/A
235/60R16	100H	75K	BSW	15950	6.5 - 8.5	9.45 on 7	27	11.5	768	1764@44	700/A/A
205/45R17	84V	65K	BSW	81433	6.5 - 7.5	8.11 on 7	24.2	10.5	858	1102@51	600/A/A
205/50R17/XL	93V	65K	BSW	36466	5.5 - 7.5	8.43 on 6.5	25.1	10.5	828	1433@50	600/A/A
205/55R17/XL	95H	75K	BSW	63183	5.5 - 7.5	8.43 on 6.5	25.9	11.5	803	1521@50	700/A/A
215/45R17	87V	65K	BSW	69185	7 - 8	8.39 on 7	24.6	10.5	844	1201@44	600/A/A
215/50R17	91H	75K	BSW	34215	6 - 7.5	8.9 on 7	25.5	11.5	815	1356@44	700/A/A
215/50R17/XL	95V	65K	BSW	31895	6 - 7.5	8.9 on 7	25.5	10.5	815	1521@50	600/A/A
215/55R17	94H	75K	BSW	28075	6 - 7.5	8.9 on 7	26.3	11.5	791	1477@44	700/A/A
215/55R17	94V	65K	BSW	08562	6 - 7.5	8.9 on 7	26.3	10.5	791	1477@44	600/A/A
215/60R17	96H	75K	BSW	26141	6 - 7.5	8.7 on 6.5	27.1	11.5	766	1565@44	700/A/A
215/65R17	99H	75K	BSW	89911	6 - 7.5	8.7 on 6.5	28	11.5	742	1709@44	700/A/A
225/45R17	91H	75K	BSW	02130	7 - 8.5	8.86 on 7.5	24.9	11.5	833	1356@44	700/A/A
225/45R17	91V	65K	BSW	94970	7 - 8.5	8.86 on 7.5	24.9	10.5	833	1356@44	600/A/A
225/50R17	94H	75K	BSW	17432	6 - 8	9.17 on 7	25.9	11.5	803	1477@44	700/A/A
225/50R17	94V	65K	BSW	00864	6 - 8	9.17 on 7	25.9	10.5	803	1477@44	600/A/A
225/55R17	97H	75K	BSW	53102	6 - 8	9.17 on 7	26.7	11.5	777	1609@44	700/A/A
225/55R17	97V	65K	BSW	90802	6 - 8	9.17 on 7	26.7	10.5	777	1609@44	600/A/A
225/60R17	99H	75K	BSW	03381	6 - 8	8.98 on 6.5	27.6	11.5	753	1709@44	700/A/A
225/60R17	99V	65K	BSW	76165	6 - 8	8.98 on 6.5	27.6	10.5	753	1709@44	600/A/A
225/65R17	102H	75K	BSW	26161	6 - 8	8.98 on 6.5	28.5	11.5	730	1874@44	700/A/A
235/45R17	94V	65K	BSW	41366	7.5 - 9	9.29 on 8	25.3	10.5	821	1477@44	600/A/A
235/50R17	96V	65K	BSW	65326	6.5 - 8.5	9.65 on 7.5	26.3	10.5	791	1565@44	600/A/A
235/55R17	99H	75K	BSW	02151	6.5 - 8.5	9.65 on 7.5	27.1	11.5	766	1709@44	700/A/A
235/60R17	102H	75K	BSW	40877	6.5 - 8.5	9.45 on 7	28.1	11.5	740	1874@44	700/A/A
245/45R17/XL	99V	65K	BSW	73090	7.5 - 9	9.57 on 8	25.6	10.5	810	1709@50	600/A/A

UNIROYAL® TIGER PAW® TOURING A/S

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
245/50R17	99V	65K	BSW	57891	7 - 8.5	9.96 on 7.5	26.6	10.5	779	1709@44	600/A/A
215/50R18	92V	65K	BSW	36583	6 - 7.5	8.9 on 7	26.5	10.5	785	1389@44	600/A/A
215/55R18	95H	75K	BSW	23044	6 - 7.5	8.9 on 7	27.2	11.5	762	1521@44	700/A/A
225/40R18/XL	92V	65K	BSW	42788	7.5 - 9	9.06 on 8	25	10.5	829	1389@50	600/A/A
225/45R18/XL	95V	65K	BSW	97324	7 - 8.5	8.86 on 7.5	25.9	10.5	802	1521@50	600/A/A
225/50R18	95H	75K	BSW	97913	6 - 8	9.17 on 7	26.8	11.5	774	1521@44	700/A/A
225/50R18	95V	65K	BSW	01371	6 - 8	9.17 on 7	26.8	10.5	774	1521@44	600/A/A
225/55R18	98H	75K	BSW	02830	6 - 8	9.17 on 7	27.7	11.5	749	1653@44	700/A/A
225/60R18	100H	75K	BSW	34634	6 - 8	8.98 on 6.5	28.6	11.5	727	1764@44	700/A/A
225/60R18	100V	65K	BSW	58228	6 - 8	8.98 on 6.5	28.6	10.5	727	1764@44	600/A/A
235/45R18	94V	65K	BSW	14791	7.5 - 9	9.29 on 8	26.3	10.5	790	1477@44	600/A/A
235/50R18	97V	65K	BSW	92032	6.5 - 8.5	9.65 on 7.5	27.2	10.5	762	1609@44	600/A/A
235/55R18	100V	65K	BSW	77658	6.5 - 8.5	9.65 on 7.5	28.1	10.5	739	1764@44	600/A/A
245/40R18/XL	97V	65K	BSW	05343	8 - 9.5	9.76 on 8.5	25.7	10.5	809	1609@50	600/A/A
245/45R18	96V	65K	BSW	93798	7.5 - 9	9.57 on 8	26.6	10.5	780	1565@44	600/A/A
245/50R18	100V	65K	BSW	09103	7 - 8.5	9.96 on 7.5	27.6	10.5	751	1764@44	600/A/A
225/55R19	99V	65K	BSW	17129	6 - 8	9.17 on 7	28.7	10.5	723	1709@44	600/A/A
235/40R19/XL	96V	65K	BSW	75093	8 - 9.5	9.49 on 8.5	26.4	10.5	787	1565@50	600/A/A
235/45R19	95V	65K	BSW	08507	7.5 - 9	9.29 on 8	27.3	10.5	760	1521@44	600/A/A
235/50R19	99V	65K	BSW	53306	6.5 - 8.5	9.65 on 7.5	28.3	10.5	735	1709@44	600/A/A
235/55R19	101H	75K	BSW	01337	6.5 - 8.5	9.65 on 7.5	29.1	11.5	713	1819@44	700/A/A
235/55R19	101V	65K	BSW	49521	6.5 - 8.5	9.65 on 7.5	29.1	10.5	713	1819@44	600/A/A
245/40R19	94V	65K	BSW	64189	8 - 9.5	9.76 on 8.5	26.7	10.5	778	1477@44	600/A/A
245/45R19/XL	102V	65K	BSW	35911	7.5 - 9	9.57 on 8	27.6	10.5	751	1874@50	600/A/A
255/40R19/XL	100V	65K	BSW	11370	8.5 - 10	10.24 on 9	27	10.5	769	1764@50	600/A/A
255/45R19	100V	65K	BSW	36294	8 - 9.5	10.04 on 8.5	28	10.5	741	1764@44	600/A/A
235/55R20	102H	75K	BSW	41360	6.5 - 8.5	9.65 on 7.5	30.1	11.5	690	1874@44	700/A/A
235/55R20	102V	65K	BSW	19679	6.5 - 8.5	9.65 on 7.5	30.1	10.5	690	1874@44	600/A/A
245/45R20	99V	65K	BSW	58689	7.5 - 9	9.57 on 8	28.6	10.5	726	1709@44	600/A/A
245/50R20	102V	65K	BSW	35428	7 - 8.5	9.96 on 7.5	29.6	10.5	701	1874@44	600/A/A

UNIROYAL®

LAREDO® CROSS COUNTRY TOUR

The affordable SUV, CUV and light truck tire with the perfect combination of durability, long-lasting wear and all-season performance.



ALL-SEASON TIRE



FEATURES AND BENEFITS

- **A comfortable and quiet highway ride.**
Computer-phased tread design.
- **Evacuates water fast for optimal traction on wet pavement.**
Wide, circumferential (tread) grooves.
- **Offers durability and reliability on the road with a 60,000-mile manufacturer's limited warranty.**
Solid shoulder tread block design.

HERE FOR EVERY ADVENTURE—EVEN THE EVERYDAY ONES.

The UNIROYAL® Laredo® Cross Country Tour is the hardworking tire that gets you where you need to be. Like the carpool line when you're dropping off or the drive-thru when you're picking up. It's the everyday tire for SUV, CUV and light truck drivers' everyday adventures.



UNIROYAL® LAREDO® CROSS COUNTRY TOUR

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
P225/70R15	100T	60K	ORWL	67118	6 - 7.5	9 on 6.5	27.4	12.5	758	1594@44	540/A/B
P235/70R15	102T	60K	ORWL	00648	6 - 8	9.5 on 7	28	12.5	743	1724@44	540/A/B
235/75R15/XL	109T	60K	ORWL	97570	6 - 8	9.25 on 6.5	28.8	12.5	721	2065@50	540/A/B
P215/70R16	99T	60K	BSW	31724	5.5 - 7	8.7 on 6.5	27.9	12.5	746	1554@44	540/A/B
P225/70R16	101T	60K	ORWL	83997	6 - 7.5	9 on 6.5	28.4	12.5	732	1654@44	540/A/B
225/75R16/XL	108T	60K	ORWL	18728	6 - 7.5	8.78 on 6	29.2	12.5	710	2005@50	540/A/B
P235/65R16	101T	60K	BSW	42459	6.5 - 8.5	9.5 on 7	28	12.5	742	1654@44	540/A/B
235/70R16	106T	60K	BSW	56182	6 - 8	9.5 on 7	29	11	718	1904@44	540/B/A
245/70R16	107T	60K	BSW	06238	6.5 - 8	9.8 on 7	29.5	11	704	1955@44	540/B/A
245/75R16	111T	60K	BSW	70772	6.5 - 8	9.8 on 7	30.5	11	683	2185@44	540/B/A
265/70R16	112T	60K	ORWL	68386	7 - 9	10.7 on 8	30.6	12.5	679	2245@44	540/A/B
225/65R17	102T	60K	BSW	64935	6 - 8	9 on 6.5	28.5	12.5	730	1704@44	540/A/B
P235/60R17	100T	60K	BSW	62794	6.5 - 8.5	9.5 on 7	28.1	12.5	740	1604@44	540/A/B
P235/65R17	103T	60K	BSW	40065	6.5 - 8.5	9.5 on 7	29.1	12.5	716	1754@44	540/A/B
245/65R17	107T	60K	BSW	08221	7 - 8.5	9.8 on 7	29.5	11	704	1955@44	540/B/A
255/65R17	110T	60K	ORWL	87325	7 - 9	10.2 on 7.5	30.1	12.5	691	2125@44	540/A/B
265/65R17	112T	60K	BSW	36288	7.5 - 9.5	10.7 on 8	30.6	11	681	2245@44	540/B/A
265/70R17	115T	60K	BSW	33585	7 - 9	10.7 on 8	31.7	11	657	2436@44	540/B/A
P235/60R18	102T	60K	BSW	31514	6.5 - 8.5	9.5 on 7	29.1	12.5	715	1704@44	540/A/B
P235/65R18	104T	60K	BSW	24461	6.5 - 8.5	9.5 on 7	30	12.5	692	1804@44	540/A/B
255/65R18	111T	60K	BSW	26607	7 - 9	10.2 on 7.5	31.1	12.5	669	2185@44	540/A/B
245/55R19	103T	60K	BSW	10330	7 - 8.5	10 on 7.5	29.7	12.5	702	1754@44	540/A/B
P245/50R20	102T	60K	BSW	24129	7 - 8.5	10 on 7.5	29.7	12.5	701	1704@44	540/A/B
275/55R20	113T	60K	BSW	52100	7.5 - 9.5	11.2 on 8.5	31.9	12.5	652	2305@44	540/A/B

UNIROYAL®

LAREDO® CROSS COUNTRY

A quality SUV/light truck tire featuring raised white lettering.



ALL-SEASON TIRE



FEATURES AND BENEFITS

- **Long, even treadwear.**
 Solid shoulder tread block design.
- **Enhances off-pavement traction and helps improve treadlife.**
 Full tread depth.
- **Wet grip and all-season traction that sticks to the road.**
 Optimized tread compound.

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE-WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/32NDS)	REV/MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
P215/75R15	100S	55K	ORWL	44847	5.5 - 7	8.5 on 6	27.7	13	751	1584@44	540/A/B
P235/75R16/XL	109S	55K	ORWL	88558	6 - 8	9.3 on 6.5	29.8	13	697	2065@50	540/A/B
P265/75R16	114S	55K	ORWL	93470	7 - 9	10.5 on 7.5	31.7	13	657	2365@44	540/A/B
31x10.50R15/C	109R	50K	ORWL	91266	7 - 9	10.5 on 8.5	30.5	15	682	2270@50	



**SOMETIMES THE
BEST ROAD TRIPS
ARE THE ONES
THAT TAKE YOU
OFF THE ROAD.**

SPEED RATING REFERENCE TABLE

SPEED SYMBOL	SPEED CATEGORY (MAX SPEED)	OPEN-ENDED SPEED CATEGORY
Q	100 mph	
R	106 mph	
S	112 mph	
T	118 mph	
U	124 mph	
H	130 mph	
V	149 mph	
W	168 mph	ZR*
Y	186 mph	↓
(Y)	Above 186 mph	

*ZR Speed Rating Defined

For tires having a maximum speed capability above 240 km/h (149 mph), a “Z” may appear in the tire size designation. For tires having a maximum speed capability above 300 km/h (186 mph), a “Z” must appear in the size designation, and the service description must include a “Y” in parentheses. Consult the tire manufacturer for the tire’s maximum speed capability when there is no service description.

EXAMPLE:	Tire Designation	Maximum Speed
	P275/40ZR17	Above 240 km/h (149 mph)
	P275/40R17 93Y	300 km/h (186 mph)
	P275/40ZR17 93Y	300 km/h (186 mph)
	P275/40R17 (93Y)	Above 300 km/h (186 mph) <i>Consult the tire manufacturer</i>

Note: Exceeding the lawful speed limit is neither recommended nor endorsed.



IMPORTANT PRODUCT NOTIFICATIONS

Passenger sizes used in CUV/SUV/Light Truck applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall. Government UTQG Ratings do not apply to light truck sized tires or winter tires.

1. The sizes shown are average design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/-3% of the section height (affecting overall diameter), and +/-4% of the section width.
2. Section width varies approximately 0.2" (5 mm) for every 0.5" change in rim width.
3. Tread patterns are often tuned to accommodate different tire widths. Tires for a particular dimension of a given tire line may vary in appearance from the tire shown in the photograph.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

Q-Speed Rated Sizes:

Maximum Speed (mph)	100
Inflation Increase (psi)	0.0
Load Capacity (% of max.)	100

R-Speed Rated Sizes:

Maximum Speed (mph)	100	106
Inflation Increase (psi)	0.0	1.0
Load Capacity (% of max.)	100	100

S-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112
Inflation Increase (psi)	0.0	1.0	2.0
Load Capacity (% of max.)	100	100	100

T-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118
Inflation Increase (psi)	0.0	1.0	2.0	3.0
Load Capacity (% of max.)	100	100	100	100

H-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0
Load Capacity (% of max.)	100	100	100	100	100	100

V-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0	5.0	5.0	5.0
Load Capacity (% of max.)	100	100	100	100	100	100	97	94	91

W-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max.)	100	100	100	100	100	100	95	90	85

Y-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	0.0	0.0	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max.)	100	100	100	100	100	100	100	100	100	95	90	85

(Y)-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	0.0	0.0	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max.)	100	100	100	100	100	100	100	100	100	95	90	85

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 100 mph (160 km/h), load and inflation must be adjusted according to the table below.

OE Code [Original Equipment Key]: GM = General Motors

Government UTQG Ratings do not apply to Light Truck tires that are LT metric or flotation size.

For all P-metric sizes: Passenger sizes used in Light Truck/SUV applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall.

XL=Extra Load

For speeds above 186 mph (300 km/h), consult your vehicle manufacturer and tire dealer.



COMPARISON CHARTS

PASSENGER TIRES COMPARISON CHART

UNIROYAL® Power Paw® All Season

UNIROYAL® Tiger Paw® Touring A/S

LIGHT TRUCK/SUV/ CROSSOVER TIRES COMPARISON CHART

UNIROYAL® Laredo® Cross Country Tour

UNIROYAL® Laredo® Cross Country

WARRANTY COVERAGE

LIMITED WARRANTY*
STANDARD
45
THOUSAND MILES

LIMITED WARRANTY*
STANDARD
6
YEARS

LIMITED WARRANTY*
H RATED
75
THOUSAND MILES

LIMITED WARRANTY*
V RATED
65
THOUSAND MILES

LIMITED WARRANTY*
STANDARD
6
YEARS

WARRANTY COVERAGE

LIMITED WARRANTY*
STANDARD
60
THOUSAND MILES

LIMITED WARRANTY*
STANDARD
6
YEARS

LIMITED WARRANTY*
S RATED
55
THOUSAND MILES

LIMITED WARRANTY*
R RATED
50
THOUSAND MILES

LIMITED WARRANTY*
STANDARD
6
YEARS

Individual performances are weighted based on consumer importance, and weighted average is the overall score. *See warranty brochure for details.



1-877-458-5878 | [UNIROYALTIRES.COM](https://www.uniroyaltires.com)

COPYRIGHT ©2022 MNA, INC. ALL RIGHTS RESERVED. UHL31264 REV 0922